

VALVE ELECTRONICCV 753  
(1A3)MINISTRY OF SUPPLY (S.R.D.E.)

Specification MOS/CV753/Issue 3

Dated:- 15.12.49.

To be read in conjunction with K1001,  
ignoring clauses:- 5.2 and 5.3SECURITYSpecification  
RestrictedValve

Unclassified

→ indicates a change

<u>TYPE OF VALVE</u> :- Diode, U.H.F.	<u>MARKING</u>		
<u>CATHODE</u> :- Indirectly heated	See K1001/4		
<u>ENVELOPE</u> :- Glass-unmetallised	Additional marking:-		
<u>PROTOTYPE</u> :- 1A3	1A3		
<u>RATING</u>	<u>Note</u>	<u>BASE</u> B7G.	
Heater voltage (v)	1.4	Pin	Electrode
Heater current (mA)	150	1	Heater
Max. peak inverse voltage	365	2	Anode
Max. peak plate current (mA)	5.0	3	Cathode
D.C. output current (mA)	0.55	4	Not connected
Max. H.C. potential	100	5	Int.connection (Do not use)
Max. anode voltage (RMS)	130	6	Anode
<u>CAPACITANCES</u> (pF)		7	Heater
Cac	0.6		
Cah	1.05		
Chc	0.7		
<u>DIMENSIONS</u>			
See K1001/A1/D4			
<u>Dimension</u>		Min.	Max.
A mm		-	54
B mm		-	19

TESTS

To be performed in addition to those applicable in K1001

	Test conditions			Test	Limits		No. tested
					Min.	Max.	
a	See K1001/AIII			<u>Capacitances (pF)</u>			
	Links to H.P.	Links to L.P.	Links to E				
	3	2,6	1,4,5,7,8, 9,10,TC1, TC2	(i) Cac	0.35	0.85	6
	2,6	1,5,7	3,4,8,9, 10,TC1,TC2	(ii) Cah	0.85	1.25	per week
	3	1,5,7	2,4,6,8,9, 10,TC1,TC2	(iii) Chc	0.4	0.9	
b	Vh	Va		Heater-cathode insulation leakage current (uA)			
	1.1	100 volts D.C. applied between heater and cathode with cathode positive to heater and 100,000 ohms external resistance.			0	20	1% (20)
c	1.4	-		If (mA)	135	165	100%
d	1.1	-		If (Note 1) (mA)	121	149	100%
e	-	-		Resonant Freq. (Note 2) (Mc/s)	500		T.A.
f	1.1	-		Operation Output current (mA) (Note 3)	0.36	-	100%

NOTES

1. This test is an alternative to test c. Both tests need not be performed.
2. This test may be made with the cold valve in a parallel line circuit. The circuit consists of two rods each 0.125" dia. and spaced with their centres 0.545" apart. A shorting bar 0.125" x 0.5" x 0.875" slides on the rods. Holes 38/1000" dia. are drilled and slotted at one end of each rod to make a sliding contact over pins 3 and 6 on the valve base. The valve is inserted in the rods so that the base is 0.013" from the end of the rods. The line is loosely coupled to a 500 Mc/s oscillator and the shorting bar is adjusted until resonance is indicated by a dip in the oscillator grid current or by a wavemeter. The distance between the base of the valve and the resonant position of the shorting bar shall not be less than 7 cms.
3. The valve is tested in a half wave rectifier circuit with 50 volts RMS input, 0.1 MR load and 2 uF reservoir condenser.

## DATA SHEET

# Valve Electronic Type CV 753

### TYPICAL OPERATING CONDITIONS


As rectifier at 50 c.p.s. - with Condenser Input Filter

Anode Supply Voltage (R.M.S.)	117	Volts
D.C. Output current	0.5	mA
Input Condenser	2.0	μF
Min. effective circuit impedance	0	Ohms

#### Note

The resonant frequency of this valve is approximately 1,000 mc/s.

### AVERAGE CHARACTERISTIC CURVE

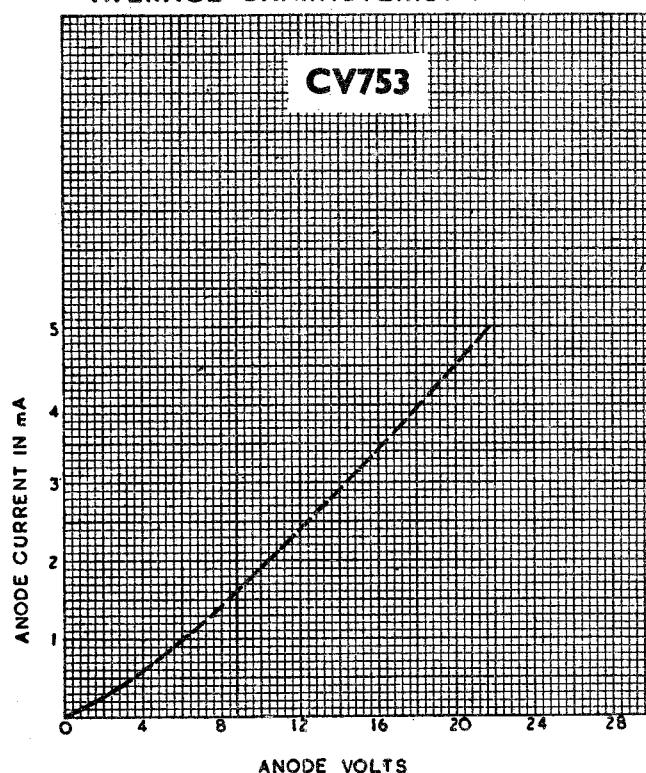

Z.4104.R.

CV 753/a.