

Specification MAP/CV350/Issue 1 Date 30.4.48 To be read in conjunction with K1001	<u>SECURITY</u>	
	<u>Specification</u> RESTRICTED	<u>Valve</u> UNCLASSIFIED

→ Indicates a change

<u>TYPE OF VALVE</u> : Triode C.W.Oscillator <u>CATHODE</u> : Indirectly heated <u>ENVELOPE</u> : Glass <u>PROTOTYPE</u> : E.1368		<u>MARKING</u>  See K1001/4	
<u>PATING</u>		<u>BASE</u> None	<u>DIMENSIONS AND CONNECTIONS</u>  See Drawings pages 3 and 4.
	Note		
Heater Voltage Heater Current (Approx.) (A) Max. Anode Voltage Max. Anode Dissipation (W) Amplification Factor (approx.) Mutual Conductance (approx.) (mA/V)	6.3 0.6 350 10 35 5.0	A    B   C	
<u>CAPACITANCES (pF)</u>			
C <sub>ag</sub> C <sub>ac</sub> C <sub>gc</sub>	1.9 0.225 2.25		
<u>NOTES</u>			
A. The heater is intended to be run at 6.3 volts. If run below 6.0 volts or above 6.6 volts the life and performance of the valve will be seriously impaired.			
B. In order to limit the rate of change of anode seal temperature it is necessary that the mass of metal in close thermal contact with the anode disc should be not less than 2 oz. (approx. 60 grams).			
C. Measured at V <sub>a</sub> = 250, I <sub>a</sub> = 25 mA.			

# CV350

## TESTS

Page 2.


To be performed in addition to those applicable in K1001

	Test Conditions					Test	Limits		No. Tested	Note
							Min.	Max.		
a	In approved apparatus					<u>Capacitances</u> (pF)			6	
						C <sub>ag</sub>	1.6	2.2	per week	
						C <sub>ac</sub>	0.2	0.25		
						C <sub>gc</sub>	1.9	2.9		
b	V <sub>h</sub>	V <sub>a</sub>	V <sub>g</sub>	I <sub>a</sub>	I <sub>g</sub>					
	6.3	-	-	-	-	I <sub>h</sub> (A)	0.5	0.75	100%	
c	6.3	250	-2	-	-	Reverse I <sub>g</sub> (μA)	-	0.5	100%	1 & 2
d	6.3	250	-1	Read	-	I <sub>a</sub> (mA)	10	50	100%	
e	6.3	250	-1 to -2	-	-	g <sub>m</sub> (mA/V)	2	-	100%	
f	6.3	250	-8	Read	-	I <sub>a</sub> (tail) (mA)	-	5	100%	
g	6.3	0   +20 (through 1000Ω)	-	-	-	I <sub>g</sub> (mA)	10	-	100%	


### NOTES

1. Valve must be run at V<sub>a</sub> = 250, I<sub>a</sub> = 40 mA for a duration of 1 minute before this test is made. See Note B. page 1.
2. Exclusive of grid emission or leakage current.



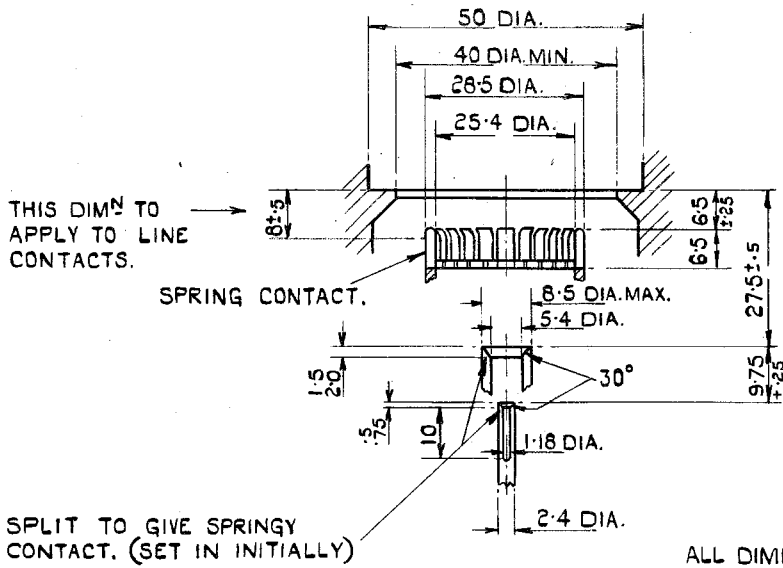

CIRCUIT DIMENSIONS

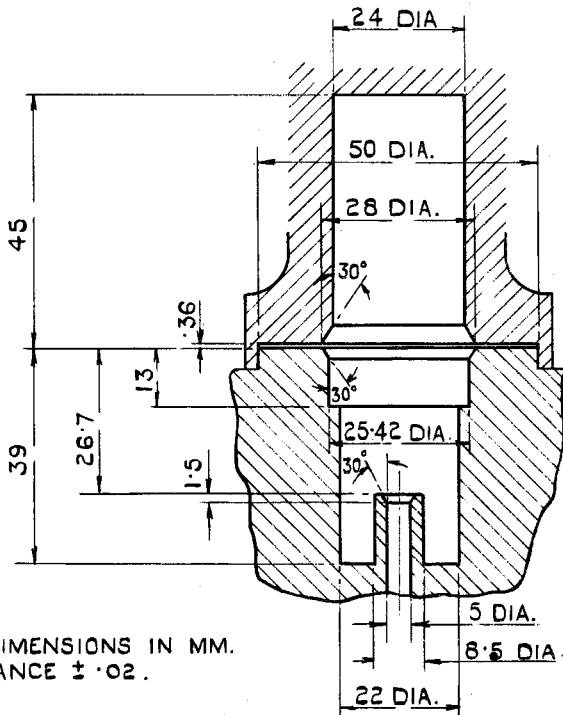

CONCENTRICITY AND GLASSWORK GAUGE.