

VALVE ELECTRONIC

MINISTRY OF SUPPLY R.R.E.

Specification MOS/CV1385/Issue 6 Dated:- November 1957. To be read in conjunction with K1001 & BS.448	<u>SECURITY</u> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; text-align: center;"><u>Specification</u> Unclassified</td> <td style="width: 50%; border: none; text-align: center;"><u>Valve</u> Unclassified</td> </tr> </table>	<u>Specification</u> Unclassified	<u>Valve</u> Unclassified
<u>Specification</u> Unclassified	<u>Valve</u> Unclassified		

← Indicates a change

<p><u>TYPE OF VALVE:-</u> Cathode Ray Tube</p> <p><u>TYPE OF DEFECTION:-</u> Electrostatic suitable for either symmetrical or asymmetrical voltages.</p> <p><u>TYPE OF FOCUS:-</u> Electrostatic</p> <p><u>BULB:-</u> Glass, internally coated with conductive coating.</p> <p><u>SCREEN:-</u> GG4</p>	<u>MARKING</u> See K1001/4 <u>BASE</u> BS.448. B 12 D																																																											
<table style="width: 100%; border: none;"> <tr> <td style="width: 40%; text-align: center;"><u>RATING</u></td> <td style="width: 20%;"></td> <td style="width: 40%;"></td> </tr> <tr> <td>Heater Voltage (V)</td> <td style="text-align: center;">4</td> <td></td> </tr> <tr> <td>Heater Current (A)</td> <td style="text-align: center;">1.0</td> <td></td> </tr> <tr> <td>Max. Final Anode Voltage (kV)</td> <td style="text-align: center;">5</td> <td></td> </tr> <tr> <td>X plate sensitivity (mm/V)</td> <td style="text-align: center;"><u>620</u> Va3</td> <td></td> </tr> <tr> <td>Y plate sensitivity (mm/V)</td> <td style="text-align: center;"><u>1160</u> Va3</td> <td></td> </tr> <tr> <td colspan="3"><u>TYPICAL OPERATING CONDITIONS</u></td> </tr> <tr> <td>Final Anode Voltage (kV)</td> <td style="text-align: center;">3</td> <td></td> </tr> <tr> <td>Second Anode Voltage (V)</td> <td style="text-align: center;">475</td> <td></td> </tr> <tr> <td>First Anode Voltage (kV)</td> <td style="text-align: center;">2</td> <td></td> </tr> <tr> <td>Beam Current (uA)</td> <td style="text-align: center;">15</td> <td></td> </tr> </table>	<u>RATING</u>			Heater Voltage (V)	4		Heater Current (A)	1.0		Max. Final Anode Voltage (kV)	5		X plate sensitivity (mm/V)	<u>620</u> Va3		Y plate sensitivity (mm/V)	<u>1160</u> Va3		<u>TYPICAL OPERATING CONDITIONS</u>			Final Anode Voltage (kV)	3		Second Anode Voltage (V)	475		First Anode Voltage (kV)	2		Beam Current (uA)	15		<u>CONNECTIONS</u> <table style="width: 100%; border: none;"> <thead> <tr> <th style="width: 15%; text-align: center;">Pin</th> <th style="width: 85%; text-align: center;">Electrode</th> </tr> </thead> <tbody> <tr><td style="text-align: center;">1</td><td style="text-align: center;">g</td></tr> <tr><td style="text-align: center;">2</td><td style="text-align: center;">k</td></tr> <tr><td style="text-align: center;">3</td><td style="text-align: center;">h</td></tr> <tr><td style="text-align: center;">4</td><td style="text-align: center;">h</td></tr> <tr><td style="text-align: center;">5</td><td style="text-align: center;">a1</td></tr> <tr><td style="text-align: center;">6</td><td style="text-align: center;">a2</td></tr> <tr><td style="text-align: center;">7</td><td style="text-align: center;">Internal coating</td></tr> <tr><td style="text-align: center;">8</td><td style="text-align: center;">y2</td></tr> <tr><td style="text-align: center;">9</td><td style="text-align: center;">x2</td></tr> <tr><td style="text-align: center;">10</td><td style="text-align: center;">a3</td></tr> <tr><td style="text-align: center;">11</td><td style="text-align: center;">x1</td></tr> <tr><td style="text-align: center;">12</td><td style="text-align: center;">y1</td></tr> </tbody> </table>	Pin	Electrode	1	g	2	k	3	h	4	h	5	a1	6	a2	7	Internal coating	8	y2	9	x2	10	a3	11	x1	12	y1
<u>RATING</u>																																																												
Heater Voltage (V)	4																																																											
Heater Current (A)	1.0																																																											
Max. Final Anode Voltage (kV)	5																																																											
X plate sensitivity (mm/V)	<u>620</u> Va3																																																											
Y plate sensitivity (mm/V)	<u>1160</u> Va3																																																											
<u>TYPICAL OPERATING CONDITIONS</u>																																																												
Final Anode Voltage (kV)	3																																																											
Second Anode Voltage (V)	475																																																											
First Anode Voltage (kV)	2																																																											
Beam Current (uA)	15																																																											
Pin	Electrode																																																											
1	g																																																											
2	k																																																											
3	h																																																											
4	h																																																											
5	a1																																																											
6	a2																																																											
7	Internal coating																																																											
8	y2																																																											
9	x2																																																											
10	a3																																																											
11	x1																																																											
12	y1																																																											
	<u>DIMENSIONS</u> See drawing, Page 4																																																											
	<u>PACKAGING</u> See K1005																																																											

NOTE:

- A:- The focussing system shall be of the three electrode type.
- B:- The tube must be adequately free from Microphony and Deflection Defocus. These tests will be covered by Type Approval.

To be performed in addition to those applicable in K1001

Clause	Test Conditions	Tests	Limits		No. Tested
			Min.	Max.	
a	See K1001/5A.13	<u>Capacitances</u> (pf) 1. Each X plate to all other electrodes. 2. Each Y plate to all other electrodes. 3. Grid to all other electrodes. 4. Each X plate to each Y plate.	-	25	2(5)

FOR ALL TESTS GIVEN BELOW $V_h = 4.0V$.

b		Ih (A)	0.66	1.2	100%
c	Cathode 100 volts positive to heater. Cathode 50 volts negative to heater.	<u>Heater Cathode Current</u> 1. Current (uA) 2. Current (uA)	-	100	100%
			-	50	100%


FOR ALL TESTS GIVEN BELOW EXCEPT CLAUSE (k) $V_{a1} = 2 \text{ kV}$, $V_{a3} = 3 \text{ kV}$

d	With a raster scan of convenient size adjust V_{a2} for optimum focus and V_g for a light intensity of 0.15 candela.	1. $-V_g$. Value to be noted (V) 2. Useful screen area, X direction (mm) Y direction (mm)	5	± 60 ± 52	100% 100%
e	V_g as in test "d". With an elliptical scan of length 100 mm. in the X and Y directions successively adjust V_{a2} for optimum focus. The minor axis of the ellipse should not exceed 5 mm.	1. Line width (mm) 2. V_{a2} (V)	325	0.9	100% 100%
f	V_{a2} adjusted for optimum focus and V_g for cut-off. See K1001/5A.10.	1. $-V_g$ (V) 2. Increase in negative value of V_g compared with value noted in test "d"1. (V)	5	80	100% 100%

Clause	Test Conditions	Tests	Limits		No. Tested
			Min.	Max.	
f	(Contd)	3. Within the range of grid voltage from cut-off to that obtained in clause d1, the beam current shall increase continuously.			100%
g	See K1001/5A.3.2. (a) $V_g - 80V$. (b) Alternative method Resistor 10 meg.	<u>Grid Insulation</u> (a) Leakage Current (uA) (b) Increase in voltmeter reading.	-	8 100%	100%
h		<u>Deflection Sensitivities</u> 1. X plate (mm/V) 2. Y plate (mm/V)	$\frac{540}{V_{a3}}$ $\frac{1026}{V_{a3}}$	$\frac{700}{V_{a3}}$ $\frac{1300}{V_{a3}}$	10%(10)
j	See K1001/5A.11.1.	Deviation of spot from centre of screen (mm)	-	10	100%
k	With V_{a3} at 5 kV See K1001/5A.14.	Over Voltage Test			100%
l		<u>Orientation of deflection Axes</u> 1. Orientation of X axis of deflection relative to $00'$ on dwg. 2. Angle between X and Y axes of deflection	80° 85°	100° 95°	100% 100%
m	A screen area of at least 100 mm x 100 mm. to be scanned with asymmetrical deflection.	<u>Trapezoidal Distortions</u> 1. Angles between adjacent sides 2. Angles between opposite sides	85° 175°	95° 185°	10%(10)
n	See K1001/11.5.	Vibration.			T.A.

DRAWING NOTE


The neck diameter may be less than 68 mm. if the manufacturer provides two rings of an approved material of outside diameter within the specified tolerances.

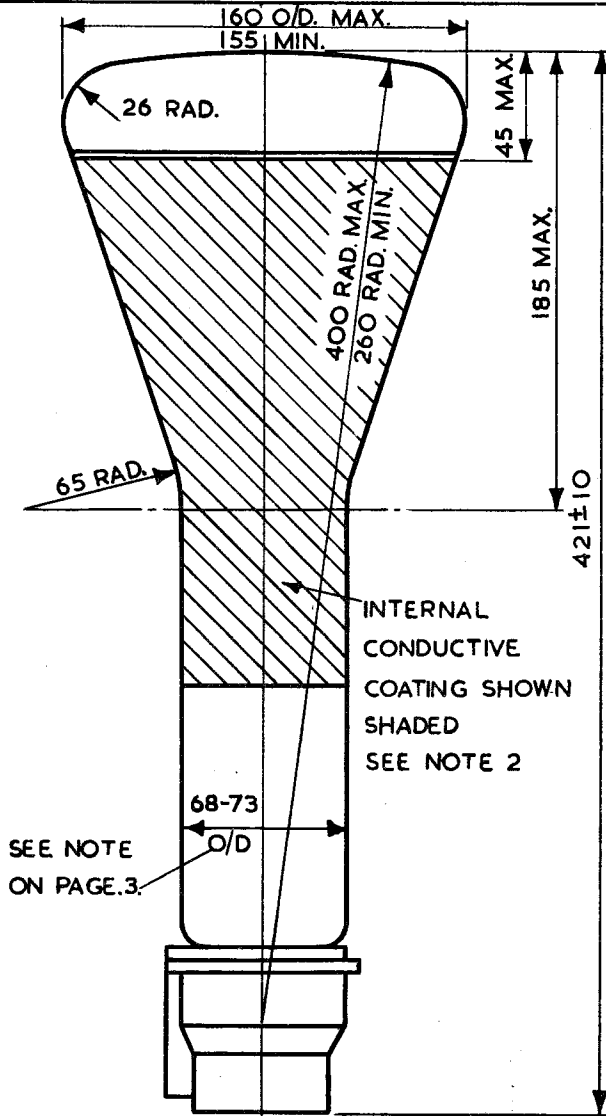

ALL DIMENSIONS IN MILLIMETRES

NOTES

1. THE TUBE WILL NORMALLY BE OPERATED WITH A3 & CONDUCTIVE COATING TIED. IF A MANUFACTURER SO DESIRES THESE ELECTRODES MAY BE STRAPPED INTERNALLY, WITH THE CONNECTION TO CONTACT MARKED "INTERNAL CONDUCTIVE COATING" OMITTED.
2. INTERNAL CONDUCTIVE COATING SHALL BE OF SUCH DIMENSIONS THAT IT FUNCTIONS EFFECTIVELY, BUT DOES NOT OBSCURE THE USEFUL SCREEN AREA.
3. LOOKING AT SCREEN WITH THE TUBE POSITIONED SUCH THAT THE BASE SPIGOT IS UPPERMOST, A POSITIVE VOLTAGE APPLIED TO THE TERMINAL X1 SHALL DEFLECT THE SPOT TO THE LEFT & A POSITIVE VOLTAGE APPLIED TO THE TERMINAL Y1 SHALL DEFLECT THE SPOT UPWARDS.

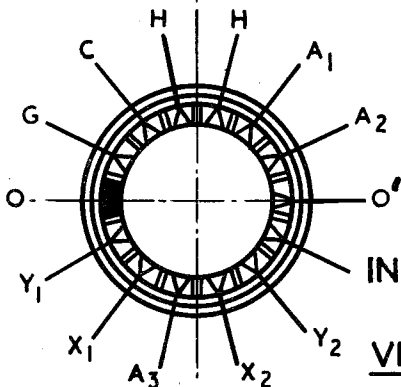

INTERNAL CONDUCTIVE COATING.

VIEW OF UNDERSIDE OF BASE.