

VALVE ELECTRONIC CV1606

GENERAL POST OFFICE: E-IN-C (W)

(POVT 62)

Specification: G.P.O./CV1606/Issue 1 Dated: 28.11.46 To be read in conjunction with K 1001	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;"><u>SECURITY</u></th> </tr> <tr> <td style="text-align: center;"><u>Specification</u></td> <td style="text-align: center;"><u>Valve</u></td> </tr> <tr> <td style="text-align: center;">Restricted</td> <td style="text-align: center;">Restricted</td> </tr> </table>	<u>SECURITY</u>		<u>Specification</u>	<u>Valve</u>	Restricted	Restricted
<u>SECURITY</u>							
<u>Specification</u>	<u>Valve</u>						
Restricted	Restricted						

---> indicates a change

<p><u>TYPE OF VALVE:</u> Triode, water-cooled</p> <p><u>CATHODE:</u> Directly heated tungsten filament</p> <p><u>ENVELOPE:</u> Metal-glass</p> <p><u>PROTOTYPE:</u> CAT2</p>	<p><u>MARKING</u></p> <p>See K1001/4</p> <p>Additional markings required (See notes A.B.C)</p> <p>Serial No.</p> <p>Filament Volts</p>																																																																		
<p><u>RATING</u></p>	<p><u>BASE</u></p> <p>None</p>																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 40%;"></th> <th style="width: 10%;"></th> <th style="width: 10%;"></th> <th style="width: 10%;"></th> <th style="width: 10%;"></th> <th style="width: 10%;"></th> </tr> </thead> <tbody> <tr> <td>Filament voltage</td> <td>(V)</td> <td>As Marked</td> <td>B</td> <td></td> <td></td> </tr> <tr> <td>Nominal filament current</td> <td>(A)</td> <td>49.5</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Max. anode voltage</td> <td>(kV)</td> <td>10.0</td> <td>D</td> <td></td> <td></td> </tr> <tr> <td>Max. anode current</td> <td>(A)</td> <td>1.0</td> <td>D</td> <td></td> <td></td> </tr> <tr> <td>Max. anode dissipation</td> <td>(kW)</td> <td>10.0</td> <td>D</td> <td></td> <td></td> </tr> <tr> <td>Max. operating frequency</td> <td>(Mc/s)</td> <td>22</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Amplification factor</td> <td></td> <td>45.0</td> <td>E</td> <td></td> <td></td> </tr> <tr> <td>Anode impedance</td> <td>(ohms)</td> <td>7250</td> <td>E</td> <td></td> <td></td> </tr> <tr> <td>Max. anode voltage at 22 Mc/s</td> <td>(kV)</td> <td>8.0</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Min. rate of water flow</td> <td>(Gals/min)</td> <td>2.5</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>							Filament voltage	(V)	As Marked	B			Nominal filament current	(A)	49.5				Max. anode voltage	(kV)	10.0	D			Max. anode current	(A)	1.0	D			Max. anode dissipation	(kW)	10.0	D			Max. operating frequency	(Mc/s)	22				Amplification factor		45.0	E			Anode impedance	(ohms)	7250	E			Max. anode voltage at 22 Mc/s	(kV)	8.0				Min. rate of water flow	(Gals/min)	2.5				<p><u>CONNECTIONS</u></p> <p>See drawing on page 4</p>
Filament voltage	(V)	As Marked	B																																																																
Nominal filament current	(A)	49.5																																																																	
Max. anode voltage	(kV)	10.0	D																																																																
Max. anode current	(A)	1.0	D																																																																
Max. anode dissipation	(kW)	10.0	D																																																																
Max. operating frequency	(Mc/s)	22																																																																	
Amplification factor		45.0	E																																																																
Anode impedance	(ohms)	7250	E																																																																
Max. anode voltage at 22 Mc/s	(kV)	8.0																																																																	
Min. rate of water flow	(Gals/min)	2.5																																																																	
	<p><u>DIMENSIONS</u></p> <p>See drawing on page 4</p>																																																																		
	<p><u>PACKING</u></p> <p>See K1001/7.3</p>																																																																		

NOTES

- A. The serial numbers will be allotted by the Inspecting Officer
- B. The Marked Voltage is defined on page 2, test (a)
- C. It is not essential that the additional markings shall appear within the frame.
- D. The max. frequency of operation for these ratings is 22 Mc/s.
- E. Measured with Ia = 0.8A, and Vg = -50V (A.C. filament) or -41V (D.C. filament).

The tests shown in Table I, or alternatively, those shown in Table II, shall be performed in addition to those applicable in K1001.

Table I (for A.C. filament heating)

	TEST CONDITIONS				TEST	LIMITS		No. Tested	Note
	Vf(AC)	Va(kV)	Vg(V)	Ia(A)		Min.	Max.		
(a)	Read	3	3000	-	Vf Minimum required for peak emission of 5.3 amps To be known as "Marked Voltage" (V)	17.0	19.0	100%	1
(b)	M.V.	0	0	-	If (A)	47.0	52.0	100%	
(c)	M.V.	12	Adjust	0.83	Reverse Ig (μA)	-	80.0	100%	2
(d)	M.V.	10	0	Read	Ia (A)	0.75	1.05	100%	
(e)	M.V.	Read	0	0.80	μ	40.0	50.0	100%	
		Read	-100						
(f)	M.V.	12	-	-	Oscillation efficiency (%)	66.6	-	100%	3
(g)	M.V.	12	Adjust	0.83	Reverse Ig (μA)	-	80.0	100%	2



Table II (for D.C. filament heating)

	TEST CONDITIONS				TEST	LIMITS		No. Tested	Note
	Vf(DC)	Va(kV)	Vg(V)	Ia(A)		Min.	Max.		
(a)	Read	3	3000	-	Vf. Minimum required for peak emission of 5.3 amps To be known as "Marked Voltage" (V)	17.0	19.0	100%	1
(b)	M.V.	0	0	-	If (A)	47.0	52.0	100%	
(c)	M.V.	12	Adjust	0.83	Reverse Ig (μA)	-	80.0	100%	2
(d)	M.V.	10	0	Read	Ia (A)	0.75	1.05	100%	
(e)	M.V.	Read	9	0.80	μ	40.0	50.0	100%	
		Read	-91						
(f)	M.V.	12	-	-	Oscillation efficiency (%)	66.6	-	100%	3
(g)	M.V.	12	Adjust	0.83	Reverse Ig (μA)	-	80.0	100%	2

NOTES

1. (a) The voltage applied to the anode and grid strapped shall be sufficient to draw from the filament a peak emission of 5.3 amps.
The test shall be made in accordance with K1001/AV
- (b) Alternatively, the voltage applied to the anode and grid strapped shall be sufficient to draw from the filament an emission of 1 ampere, and the filament voltage required for this emission shall be multiplied by 1.21 to determine the test result.
2. The duration of tests (c) and (g) shall be 15 minutes each, and the reverse grid current shall not be rising at the end of either test. Test (c) shall precede test (f), and test (g) shall follow immediately upon the end of test (f).
3. The duration of test (f) shall be 15 minutes and the anode current shall not be less than 1 amp.
The test shall be made by causing the valve to oscillate in an approved circuit, the oscillation frequency being not less than 15 Mc/s. In the event of such a circuit not being available for this test, the valve may be tested in an oscillatory circuit of a frequency not less than 800 kc/s, but, if this applies, the right is reserved to conduct test (f) on service premises in a circuit of frequency not greater than 22 Mc/s, and to reject any valve found to be unsatisfactory at this higher frequency during the test.

OUTLINE DRAWING.

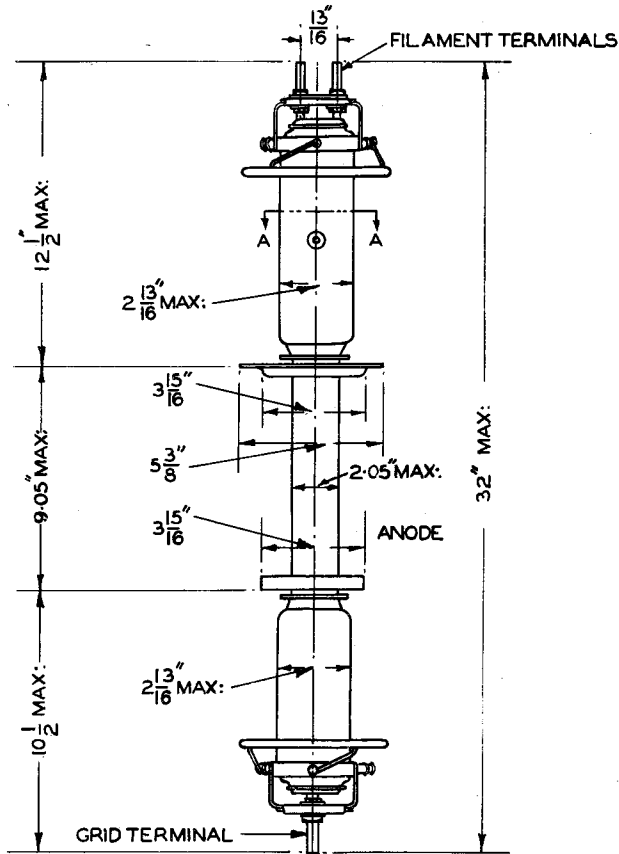

SECTION ON LINE A-A