


Specification MOSA/CV.1883 Issue 1 Dated 14.10.54 To be read in conjunction with B.S.1409 and K1801.	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

TYPE OF VALVE - R.F. Tetrode, air cooled		<u>MARKING</u> See K1001/4	
CATHODE - Directly heated, thoriated tungsten filament		<u>BASE</u> See drawing on page 3	
PROTOTYPE - 4H/180E			
<u>RATINGS</u>		<u>CONNECTIONS</u>	
		Note	
Filament Voltage (V)	5.0	Pin	Electrode
Filament Current (nom.) (A)	22.5		
Filament Useable Emission (max.) (A)	5.0	1	f1
Mutual Conductance (mA/V)	10.0	2	g1
Inner μ	3.5	3	f2
		4	g1
		5	f1
		6	g1
		7	f2
		8	g1
		9	a
		10	g2
<u>MAXIMUM RATINGS</u>		<u>DIMENSIONS</u> See drawing on page 3	
Max. direct Anode Voltage (kV)	2.0		
Max. direct Anode Current (mA)	300		
Max. Anode Dissipation (W)	330		
Max. direct Screen Voltage (V)	250		
Max. direct Screen Dissipation (W)	20		
Max. direct Grid Dissipation (W)	20		
Max. Frequency for above ratings (Mc/s)	110		
<u>CLASS C AMPLIFIER OR OSCILLATOR (UNMODULATED)</u>			
<u>MAXIMUM RATINGS</u>			
Max. direct Anode Voltage (kV)	2.5		
Max. direct Anode Current (mA)	600		
Max. direct Anode Dissipation (W)	500		
Max. direct Screen Voltage (V)	500		
Max. direct Screen Dissipation (W)	30		
Max. direct Grid Dissipation (W)	20		
Max. frequency for above ratings (Mc/s)	110		
<u>CAPACITANCES (pF)</u>			
C in	36	C	
C out	13	C	
Ca, g1	0.15	C	
<u>NOTES</u>			
A. Measured at $V_a = 1kV$, $V_{g2} = 500V$, $V_{g1} = -30V$.			
B. With air circulation of 25 cu.ft./min. and additional cooling for header cup of 10 cu.ft./min. Maximum ambient temperature 45°C.			
C. Measured with a 12 in. square plate fixed to the screen grid terminal.			

TESTS

To be performed in addition to those detailed in K1001

Test Conditions								Test	Limits Min. Max.		No. Tested	Note
See K1001/A III								Capacitances (pF)				
a								C in	30	42	6 per week T.A.	
								C out	10	16		
								Ca, g1		2.0		
Vf (V)	Va (V)	Vg1 (V)	Vg2 (V)	Ig1 (mA)	Ia (A)	Ig2 (mA)						
b	5.0	-	-	-	-	-	If (A)	20	25	100%	1	
c								Out-off Test				
	5.0	1000	-150	500	-	-	Ia (mA)		100	100%	1	
d								Vacuum Test (hot) and Characteristics Test				
	5.0	1000	-	500	-	0.25	Vg1 (V)	-60	-110	100%	1,2	
								Ig1 (μ A)				20
								Ig2 (mA)				30
e								Mutual Conductance Test				
	5.0	1000	-40	500	-	Ia1	(Ia2 - Ia1) 1000 (mA/V)			100%	1	
	5.0	1000	-20	500	-	Ia2	20	6	12			
f								Total Emission Test				
	5.0	750	750	750	-	-	Ie (A)	5		100%	3	
<u>NOTES</u>												
1. For this and subsequent tests, the filament shall be heated by A.C. 50 cps. current and the common return of grid and anode circuits shall be to the centre point of the filament transformer secondary (except as specified in test (f)). During the application of filament voltage, the filament current shall at no time exceed 40 amperes.												
2. Ig1 must not exceed the value specified at the end of 10 minutes run and must not be rising.												
3. The emission shall be measured by the discharge of a condenser charged to 750 volts and connected between the anode and grids strapped and one end of the filament.												

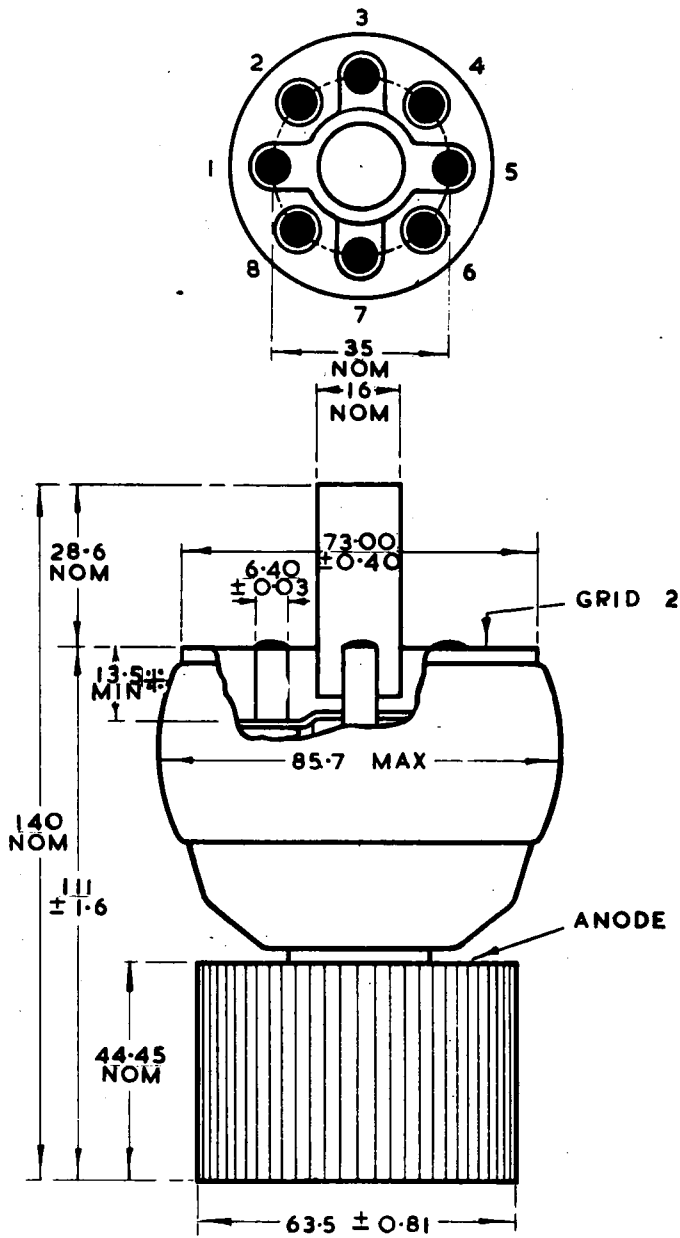

‡ DENOTES CONTACT LENGTH
ALL DIMENSIONS ARE IN MILLIMETRES