

MINISTRY OF SUPPLY - DLRD(A)/TRE

VALVE ELECTRONIC

CV 2129

Specification MOS(A)/CV2129 Issue 4 Dated 13.2.53 To be read in conjunction with K1001	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

—————> Indicates a change

TYPE OF VALVE - V.H.F. Power Amplifier Pentode				<u>MARKING</u>		
CATHODE - Indirectly-heated				See K1001/4. In addition, the RTMA number shall also be clearly marked.		
ENVELOPE - Glass - unmetallised						
PROTOTYPE - 5763						
<u>RATING</u>				<u>BASE</u> B9A		
				<u>CONNECTIONS</u>		
				Note		
Heater Voltage	(V)	6.0		Pin Electrode		
Heater Current	(A)	0.75				
Max. Anode Voltage (Ia = 0)	(V)	500	A	1	Anode	
Max. Screen Voltage (I _{g2} = 0)	(V)	500	A	2	No connection	
Max. Operating Anode Voltage	(V)	300	A	3	Suppressor Grid	
Max. Operating Screen Voltage	(V)	250	A	4	Heater	
Max. Anode Dissipation	(W)	12	A	5	Heater	
Max. Screen Dissipation	(W)	2	A	6	Screen Grid	
Anode Current	(mA)	45	B	7	Cathode	
Screen Current	(mA)	4.5	B	8	Control Grid	
Mutual Conductance	(mA/V)	7.0	B	9	Control Grid	
Amplification Factor (g ₁ - g ₂)		16	B	<u>DIMENSIONS</u>		
Max. Operating Frequency	(Mc/s)	175		See K1001/A1/D4		
Max. Bulb Temperature	(°C)	250		Dimensions Min. Max.		
<u>CAPACITANCES (pF)</u>				A mm	-	66.2
C _{ag1} (max.)		0.3	C	L mm	-	59.9
C _{ge} (nom.)		9.5	C	B mm	-	22.2
C _{se} (nom.)		4.5	C			
<u>NOTES</u>						
A. Absolute maximum values.						
B. Measured at Va = 250; Vg2 = 250; Vg1 = -7.5.						
C. Measured without metal screen.						

Z.4631.R.

CV2129/4/1

CV 2129

TESTS


To be applied in addition to those applicable in K1001.

Test Conditions					Test	Limits		No. Tested	Note				
						Min.	Max.						
See K1001/ATIII					<u>CAPACITANCES (pF)</u>			20	2				
Links to H.P.	Links to L.P.	Links to E								Cagl	-	0.3	per
1	8,9	2,3,4,5,6 7,10, TC1, TC2								Gge	7.9	11.1	week
8,9	2,3,4,5 6,7,10	1,TC1,TC2			Gae	3.0	6.0						
1	2,3,4,5 6,7,10	8,9, TC1, TC2											
	Vh	Va	Vg3	Vg2	Vg1								
b	6.0	0	0	0	0	Ih (A)	0.690	0.810	100% or 8				
c	6.0	250	0	250	-7.5	Ia (mA)	33	57	100%	3			
d	6.0	250	0	250	-7.5	Ig2 (mA)	-	7.0	100%				
e	6.0	250	0	250	-7.5	Reverse Igl (μA)	0	2.5	100%				
f	6.0	250	0	250	-7.5	gm (mA/V.)	5.6	9.0	100% or 8				
g	6.0	250	0	250	-7.5	Inner μ	13	20					
h	6.0	250	0	250	-15.0	Ia Tail (mA)	0	15	100%				
j	6.0	30	30	30	30	D.C. Emission (mA)	180	-	100%	5			
k	6.0	-	-	-	-	Power Oscillation (mA)	6.0	-	20 per week	4			
m	6.0	Anode and grids strapped. Peak applied voltage = 200V. Tp = 10μsec. min. PRF = 50 c/s. pulse shape half sine wave.				Peak Cathode Current (A)	4.5	-	100% or 8				

NOTES

- Before commencing tests, the valves shall be preheated for not less than 5 minutes under the following conditions:-
Vh = 6.0 to 6.6; Va = 250; Vg2 = 250; Vg1 = 0; Rk = 150ohms ± 10% (1 watt min.)
- Measured without metal screen.
- With Vg1 applied in turn to pins 8 and 9, Ia must show no change.
- Measured in circuit (as shown on Page 3) with Anode and screen supply 250V. and frequency 70 Mc/s. output measured as diode current of CV. 140.
- Test voltages to be applied only for sufficient time to obtain steady reading.

CV2129/4/2

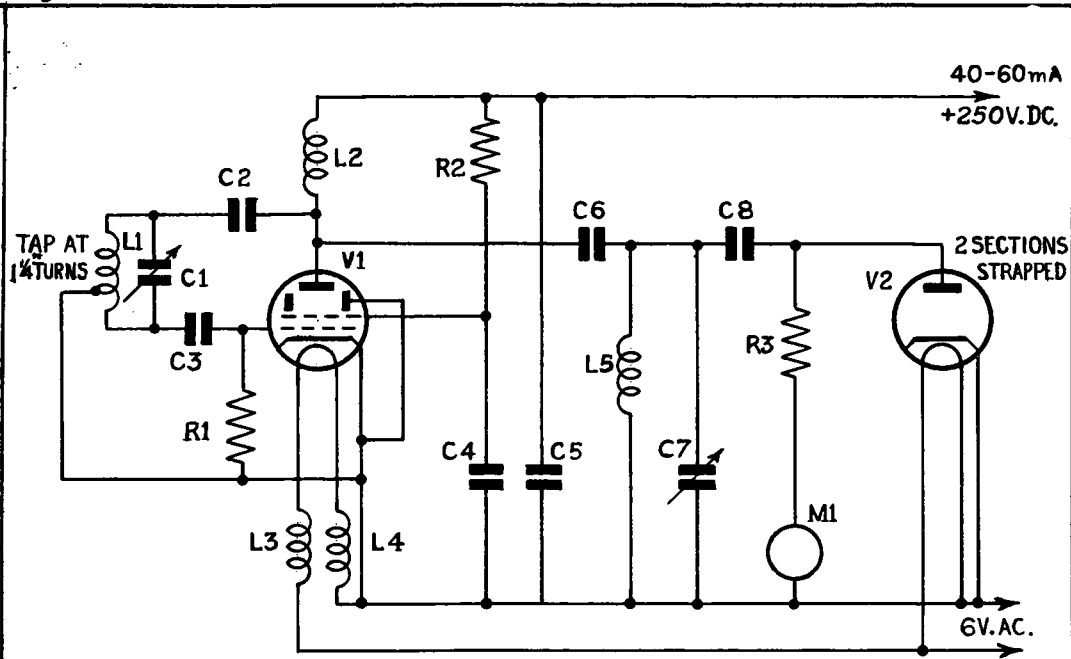

LEGEND

Component	Description	No. Off
R1 & R3	Resistors 22KΩ 1W ± 10%	2
R2	Resistor 10KΩ 1W ± 10%	1
C1 & C7	Condensers 3-30 pF. Trimmer	2
C2, C3, C4 & C5	Condensers .001 μF. 500V. D.C. Wkg.	4
C6 & C8	Condensers 50 pF. Mica Type.	2
M1	0-10mA Directly Calibrated Meter	1
Valve 1	CV 2129	1
Valve 2	CV 140	1
Test Socket	Noval Valve Socket P.T.F.E. Type EB-99/901	1

COIL DETAILS

L1 & L5 4 TURNS #16SWG. 1" LONG
0.8" IN DIA.
(NOVAL BULB AS FORMER)

L2, L3 & L4 R.F. CHOKES. 20 TURNS
#22SWG 1/8" IN DIA. 2" LONG.

POWER OSCILLATOR TEST CIRCUIT

DATA SHEET

Valve Electronic Type CV 2129

TYPICAL OPERATING CONDITIONS (AUDIO FREQUENCIES).

Class A Amplifier (Single Ended). Triode Connection (Pins 1 7 6 strapped)

Heater voltage	6.0	Volts
Anode voltage	250	Volts
Grid voltage	-7.5	Volts
Autobias resistor (Rk)	150	Ohms
Anode current (no signal)	50	mA
Anode impedance (ra)	2100	Ohms
Amplification factor (μ)	15.75	
Mutual conductance	7.5	mA/V
Anode load resistor (Ra)	4000	Ohms
Peak A.F. grid voltage	7.1	Volts
Total harmonic distortion	5.2	%
Power output	0.7	Watts

Class A Amplifier Push-Pull. Triode connected (Pins 1 and 6 strapped)

Heater voltage	6.0	Volts
Anode voltage	250	Volts
Grid voltage	-7.25	Volts
Autobias resistor (Rk)	75	Ohms
Anode current (no signal)	98	mA
Output load (anode-anode) (Ra)	5000	Ohms
Peak A.F. grid voltage (grid-grid)	29.4	Volts
Total harmonic distortion	1.6	%
Power output	1.7	Watts

Note: Values given are for two valves.

Class A Amplifier (Single ended). Tetrode connection

Heater voltage	6.0	6.0	6.0	6.0	Volts
Anode voltage	250	250	300	300	Volts
Screen voltage	225	225	225	225	Volts*
Grid voltage	-6.25	-	-7.4	-	Volts
Autobias resistor	-	120	-	175	Ohms
Anode current	45	45	40	40	mA
Screen current	3.7	3.9	2.3	2.4	mA
Anode impedance (ra)	38000	-	65000	-	Ohms
Mutual conductance	6.8	-	6.3	-	mA/V
Anode load resistance	5500	5500	8500	8500	Ohms
Peak A.F. grid voltage	6.1	6.2	6.8	7.3	Volts
Harmonic distortion total	5.1	5.6	7.0	7.6	%
Power output	2.85	2.8	4.0	4.15	Watts

* The screen voltage where lower than the anode voltage should be obtained from a potentiometer across the H.T. line to chassis, adequately by-passed, and not by means of a series resistance.

CV 2129

DATA SHEET

<u>Class A Amplifier (Push-Pull).</u>		Tetrode connection			
Heater voltage		6.0	6.0	6.0	Volts
Anode voltage		250	300	300	Volts
Screen voltage		225	225	225	Volts
Grid voltage		-6.25	-	-	Volts
Autobias resistor		-	68	68	Ohms
Peak A.F. grid-grid voltage		12.5	14	13.75	Volts
No signal anode current		88	84	86.5	mA
Max. signal anode current		89	84.5	85	mA
No signal screen current		7.2	6.9	5.6	mA
Max. signal screen current		18	18	14.6	mA
Load resistance anode-anode		11500	11500	11500	Ohms
Total harmonic distortion		3.9	4.2	4.2	%
Power output		6.2	6.7	7.5	Watts

Note: Values given are for two valves.

<u>Class AB1 Amplifier (Push-Pull).</u>		Tetrode connection				
Heater voltage		6.0	6.0	6.0	6.0	Volts
Anode voltage		250	250	300	300	Volts
Screen voltage		225	225	225	225	Volts
Grid voltage		-9	-	-9	-	Volts
Autobias resistor		-	150	-	150	Ohms
Peak A.F. grid-grid voltage		18	21.5	18.5	21	Volts
No signal anode current		58	56	59	57	mA
Max. signal anode current		67	56	70	57	mA
No signal screen current		3.8	3.7	3.0	2.8	mA
Max. signal screen current		18	16.4	17.2	14.5	mA
Load resistance (anode-anode)		11500	11500	13500	13500	Ohms
Total harmonic distortion		4.2	3.5	5.1	4.4	%
Power output		7.8	7.2	9.8	8.8	Watts

Note: Values given are for two valves.

<u>Class AB2 Amplifier (Push-Pull).</u>		Tetrode connection			
Heater voltage		6.0			Volts
Anode voltage		300			Volts
Screen voltage		225			Volts
Grid voltage		-12.5			Volts
Peak A.F. grid-grid voltage		71			Volts
No signal anode current		27			mA
Max. signal anode current		140			mA
No signal screen current		1.2			mA
Max. signal screen current		18			mA
Peak grid input power		0.8			Watts
Load resistance (anode-anode)		4500			Ohms
Total harmonic distortion		9.6			%
Power output		25			Watts

Note: Values given are for two valves.

CV.2129/a/31-7-53/2

R.F. POWER AMPLIFIER AND OSCILLATOR (Class C Telegraphy or Class
C - F.M. Telephony) AND FREQUENCY MULTIPLIER

Maximum continuous ratings (Absolute values)

D.C. anode voltage (Max.)	300	Volts
D.C. grid 3 voltage (Max.)	0	Volts
D.C. grid 2 voltage (Max.)	250	Volts
D.C. grid 1 voltage (Max.)	-125	Volts
D.C. anode current (Max.)	50	mA
D.C. grid 2 current (Max.)	15	mA
D.C. grid 1 current (Max.)	5	mA
D.C. anode input (Max.)	15	Watts
D.C. anode dissipation (Max.)	12	Watts
D.C. grid 2 input (Max.)	2	Watts
Bulb temperature at hottest point on the surface (Max.)	250	°C



R.F. Power Amplifier and Oscillator (Class C Telegraphy or Class
C - F.M. Telephony)

Typical operation at 50 Mc/s



D.C. anode voltage	300	Volts
D.C. grid 2 voltage	250	Volts
D.C. grid 1 voltage	-60	Volts
D.C. grid 1 resistor	22,000	Ohms
Peak R.F. grid voltage	80	Volts
D.C. anode current	50	mA
D.C. grid 2 current	5	mA
D.C. grid 1 current (approx.)	3	mA
Driving power (approx.)	0.35	Watts
Power output (neglecting output tuned circuit loss)	8	Watts


Frequency Multiplier - Typical operation

	Doubler to 175 Mc/s	Tripler to 175 Mc/s	
D.C. anode voltage	300	300	Volts
D.C. grid 2 supply voltage	300	300	Volts
Series grid 2 resistor	12500	12500	Ohms
D.C. grid 1 voltage	-75	-100	Volts
D.C. grid 1 resistor	75000	100000	Ohms
Peak R.F. grid 1 voltage	95	120	Volts
D.C. anode current	40	35	MA
D.C. grid 2 current	4	5	mA
D.C. grid 1 current (approx.)	1	1	mA
Driving power (approx.)	0.6	0.6	Watts
Power output (neglecting output tuned circuit loss)	3.6	2.8	Watts

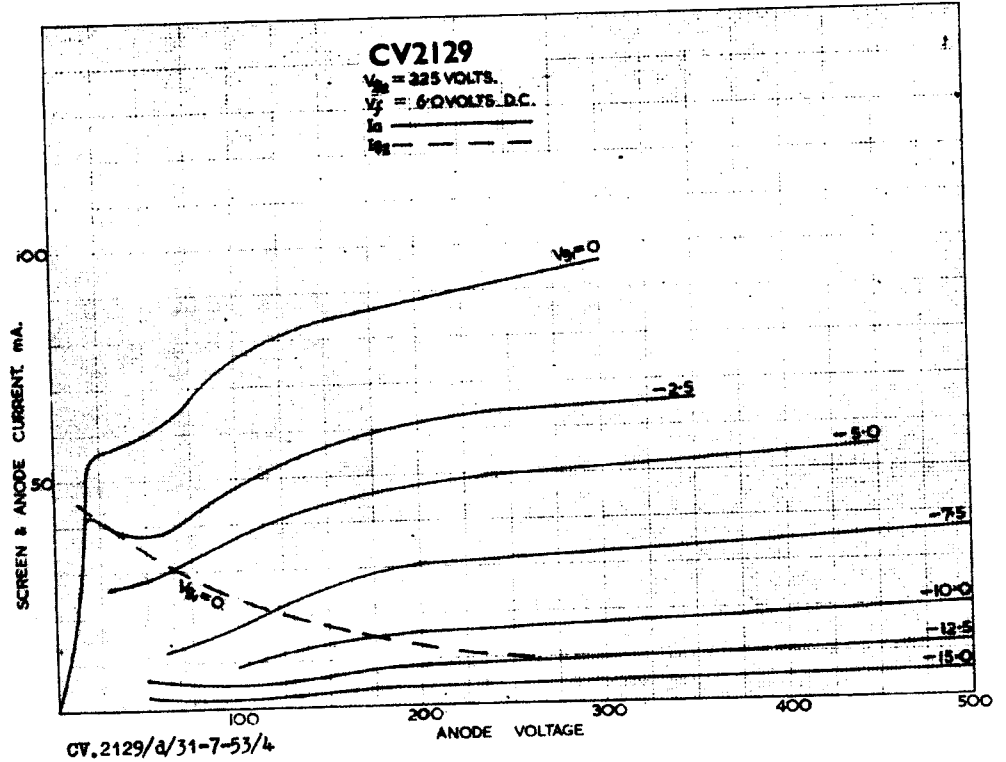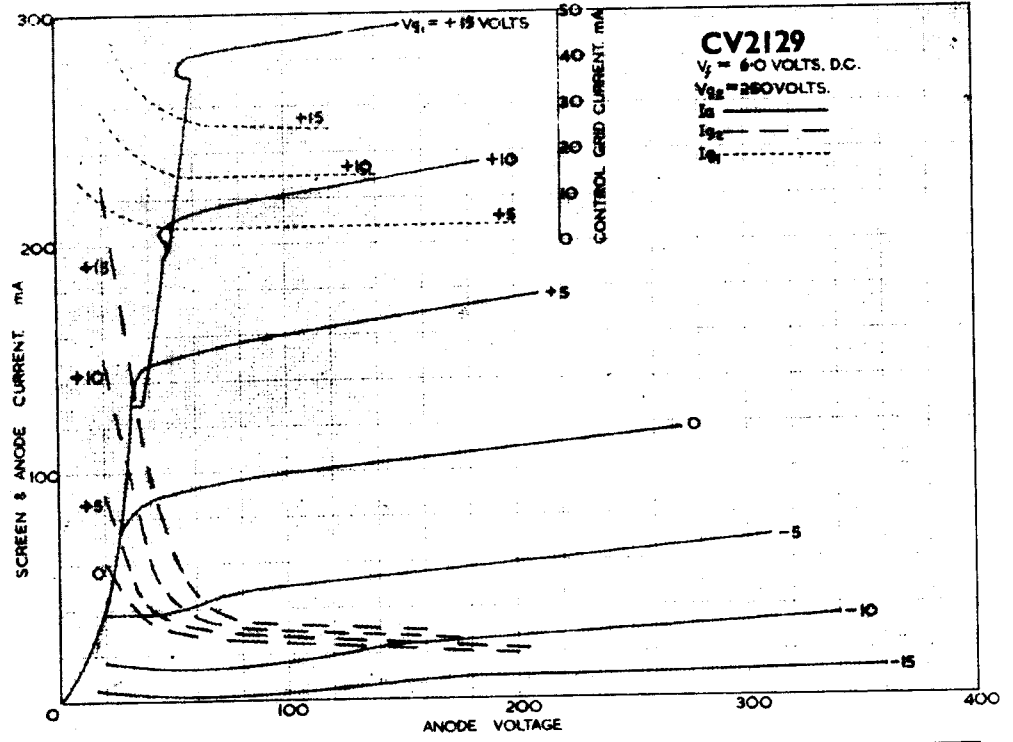

CV.2129/d/31-7-53/4

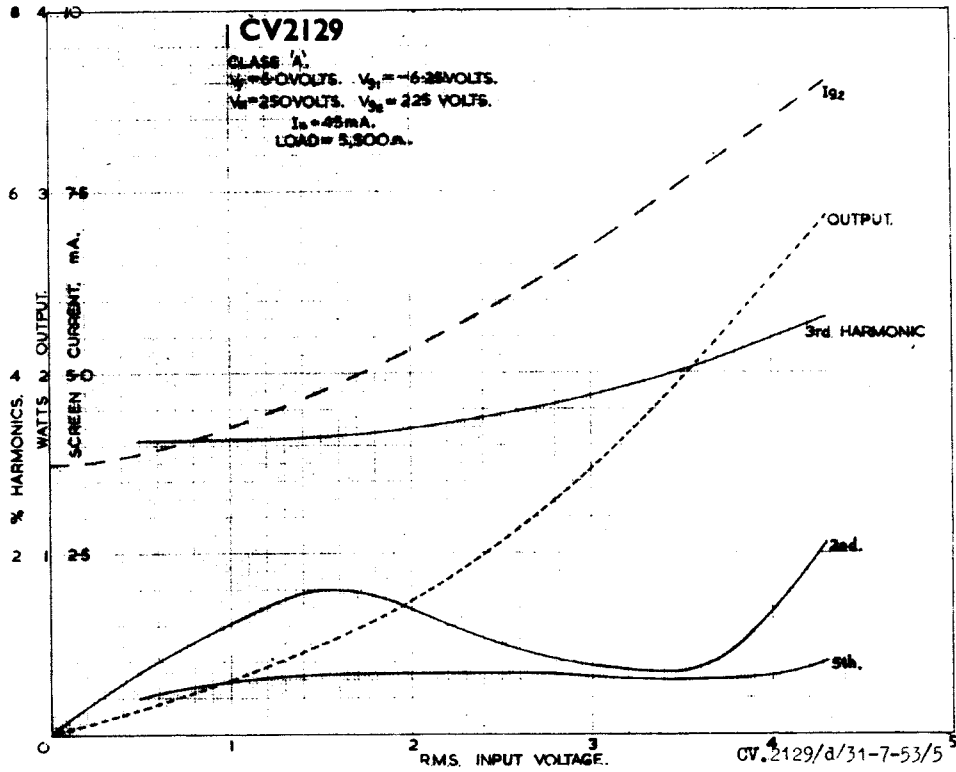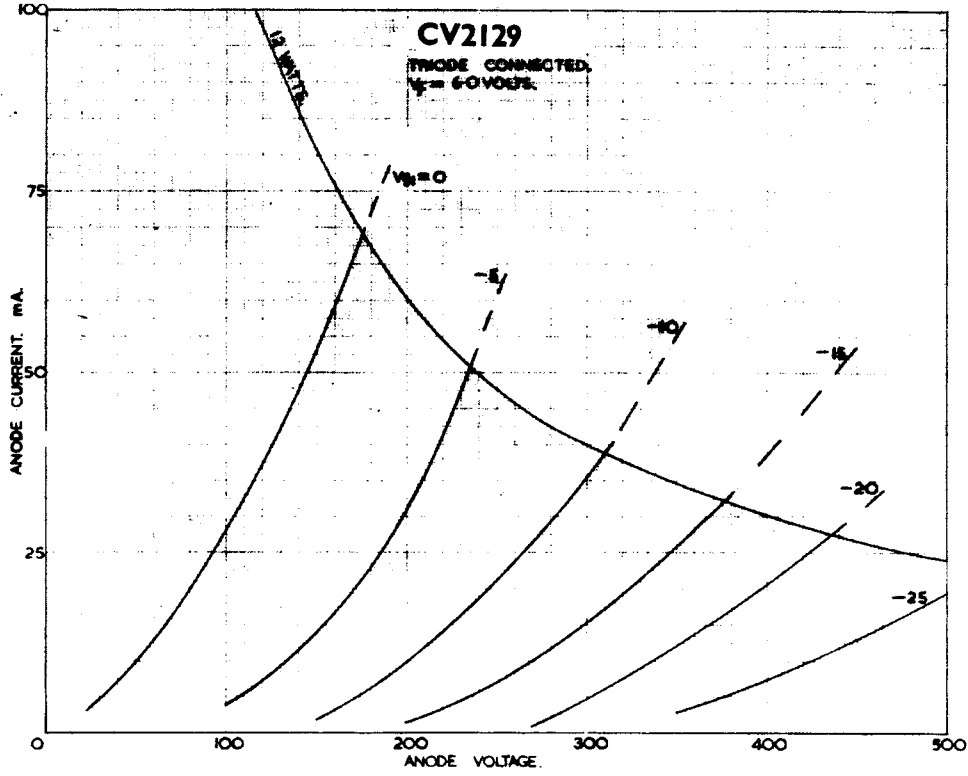

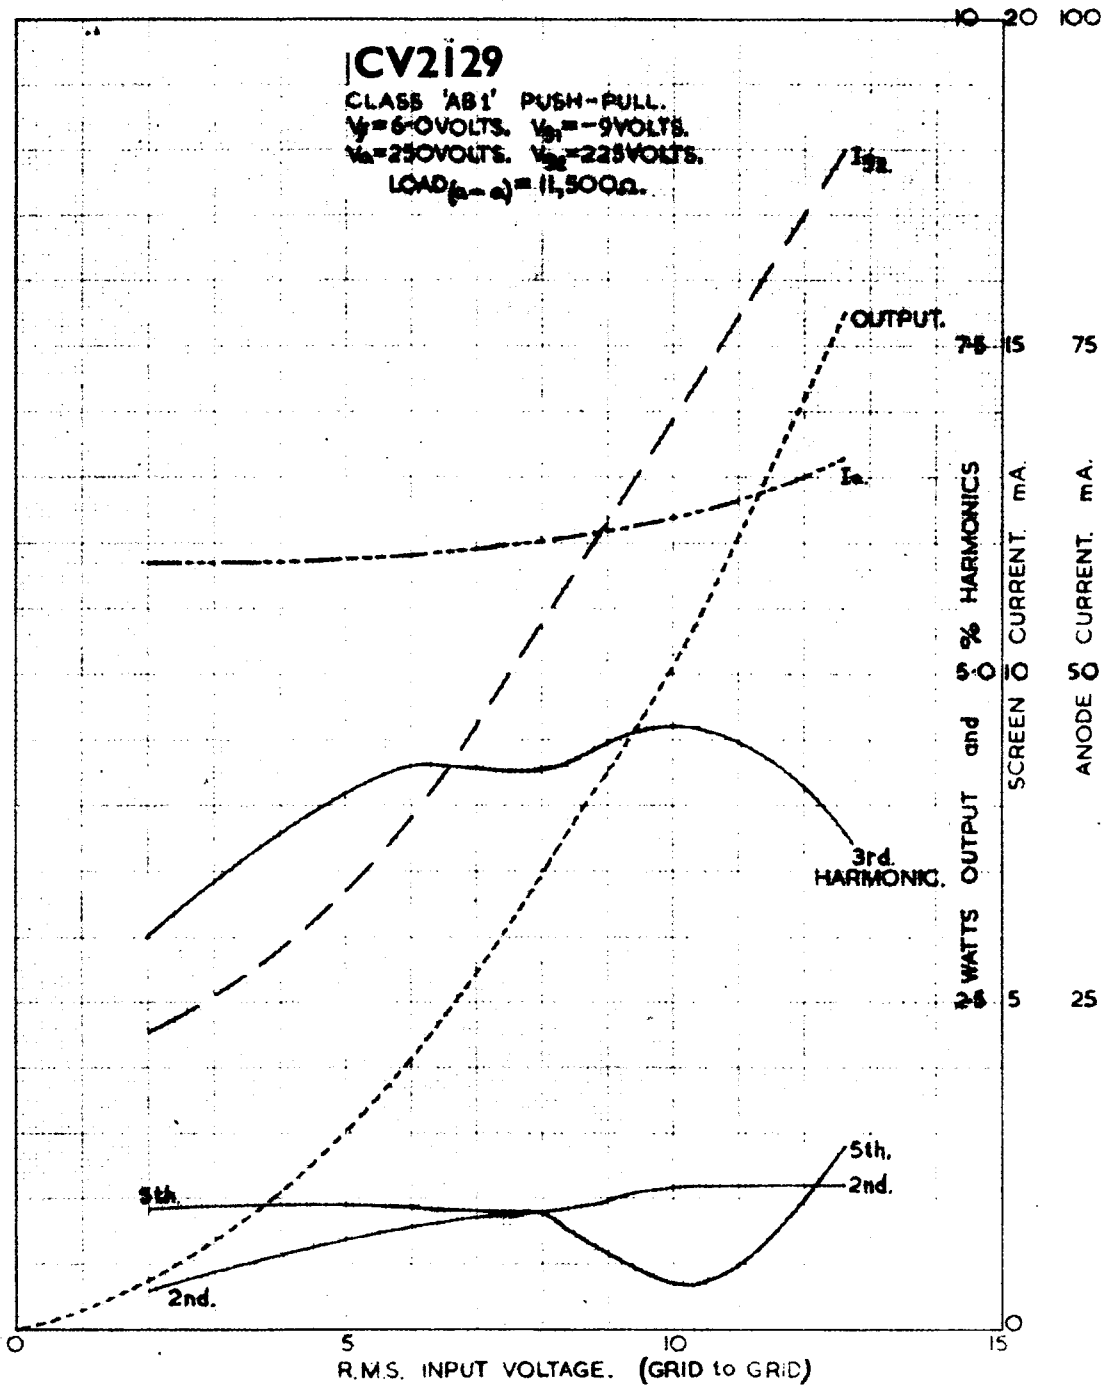

CV. 2129/a/31-7-53/6.