

Specification MDS(A)/CV2184 Issue 2 Dated 29.4.53 To be read in conjunction with K1001	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

→ Indicates a change

<u>TYPE OF DEFLECTION</u> - Electrostatic <u>BULB</u> - Internally coated with conductive coating <u>SCREEN</u> - YTM.36 <u>PROTOTYPE</u> - VCRX.298				<u>MARKING</u> See K1001/4	
				<u>BASE</u> 12-pin spigot	
				<u>CONNECTIONS</u>	
<u>RATING</u>				Pin	Electrode
			Note		
Heater Voltage	(V)	4.0		1	C
Heater Current	(A)	1.0		2	G
Max. Fourth Anode Voltage	(kV)	3.0	A	3	H
Max. Third Anode Voltage	(kV)	1.5	A	4	H
				5	A2
				6	Pin omitted
				7	Y2
				8	X2
				9	A1, A3, and conductive coating
				10	X1
				11	Y1
				12	Pin omitted
				Side Contact	A4
				<u>SIDE CONTACT</u> Snap Terminal	
				<u>DIMENSIONS</u> See Drawing on Page 5	

NOTES

A. The tube shall be capable of operating with first and third anode voltages of 1500V, and fourth anode voltage of 3.0 kV, at a pressure equivalent to 5.77^oins of mercury at 15°C.

B. The tube shall be of the post deflector accelerated type and of a design such that a change of ± 10% in the Va2 voltage shall not produce an appreciable change in the cut-off voltage.



C. The tube shall be adequately free from microphony.

To be performed in addition to those applicable in K1001

Test Conditions					Test	Limits		No. Tested
Vh (V)	Va4 (kV)	Va1 Va3 (kV)	Va2 (V)	Vg (V)		Min.	Max	
In all cases symmetrical deflecting voltages shall be applied to the Y-plates and asymmetrical deflecting voltages to the X-plates.								
a	See K1001/5A.13				CAPACITANCES (pF) 1. Each X or Y-plate to all other electrodes. 2. One X to one Y-plate 3. Grid to all other electrodes	-	21	5% (5)
b	4.0	0	0	0	0	Ih (A)	0.9	1.1 5% (10)
c	4.0	2.5	1.3	Adjust for optimum focus	Adjust to cut-off	Vg (V) Value to be noted	-	105 100%
d	4.0	2.5	1.3	As for Test (c)	-	1. Vg (V) 2. Change in value of Vg from Test (c) (V) 3. Within the range of grid voltage from cut-off to standard light output the beam current shall increase continuously	-1	- 45 100%
e	4.0	2.5	1.3	As for Test (c)	-	1. Line width (mm) 2. Va2 (V)	-	1.2 100% 200 5% (10)
<p>DEFLECTION With a sine-wave time-base of 10 kc/s nom. and a line length of 55 mm. in the X and Y directions successively, the line width to be measured at the centre of the trace.</p> <p>GRID The grid will be pulsed positively from cut-off with amplitude equal to the value obtained in Test (d.2), the nominal values of pulse duration and recurrence being 100 μsecs and 100 c/s, respectively.</p>								

	Test Conditions					Test	Limits		No. Tested
	Vh (V)	Va1 (kV)	Va2 (kV)	Va3 (V)	Vg (V)		Min	Max	
f	4.0	2.5	1.3	Any convenient value	-105	<u>GRID INSULATION</u> 1. Leakage current (µA) 2. Increase in voltmeter reading	- -	21 100%	100% 100%
	Recommended method:- See K1001/5A.3.2 Resistor = 5 megohms								
g	4.0	-	-	As for Test (f)	-	<u>HEATER CATHODE LEAKAGE</u> Leakage current (µA)	-	200	100%
	See K1001/5A.3.3 100 volts shall be applied between heater and cathode								
h	4.0	2.5	1.3	As for Test (f)	Any convenient value	<u>DEFLECTION SENSITIVITIES</u> 1. X-plate (mm/V) 2. Y-plate (mm/V)	0.17 0.17	0.26 0.26	5% (10)
i	4.0	2.5	1.3	As for Test (f)	As for Test (h)	Deviation of spot from centre of screen (mm)	-	7.0	100%
k	4.0	2.5	1.3	As for Test (f)	As for Test (h)	<u>USEFUL SCREEN AREA</u> Diameter (mm)	55	-	100%
	Deflection to cover stated circle centred on centre of screen.								
m	4.0	2.5	1.3	As for Test (f)	As for Test (h)	Angle between X and Y axes of deflection	85°	95°	100%
n	4.0	2.5	1.3	As for Test (f)	As for Test (h)	1. Orientation of Y axis of deflection relative to 00' on drawing. 2. Orientation of diameter line through snap terminal relative to Y axis	-	±10°	100%
							-	±10°	100%

	Test Conditions					Test	Limits		No. Tested
	Vh (V)	Va1 (kV)	Va1 Va3 (kV)	Va2 (V)	Vg (V)		Min.	Max	
D	4.0	2.5	1.3	As for Test (f)	As for Test (h)	<p>1. The screen shall be no worse for graininess than a standard pattern.</p> <p>2. The variation of brightness over any part of the area shall not exceed a 2 : 1 ratio.</p>			100%
						Deflecting voltages to give a raster covering the useful screen area. The spot shall be defocussed such that separate lines shall not be discernible on the raster.			100%
q	4.0	2.5	1.3	As for Test (f)	As for Test (h)	Persistence (secs)	5	-	100%
						Test to be performed using approved test gear and a close raster of convenient size.			

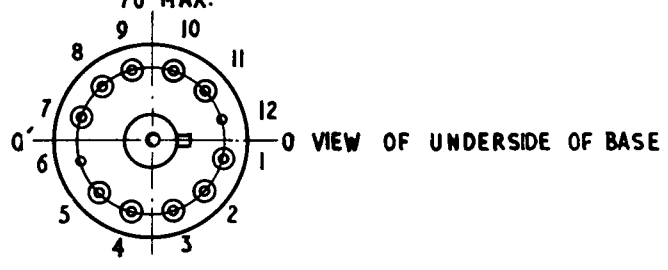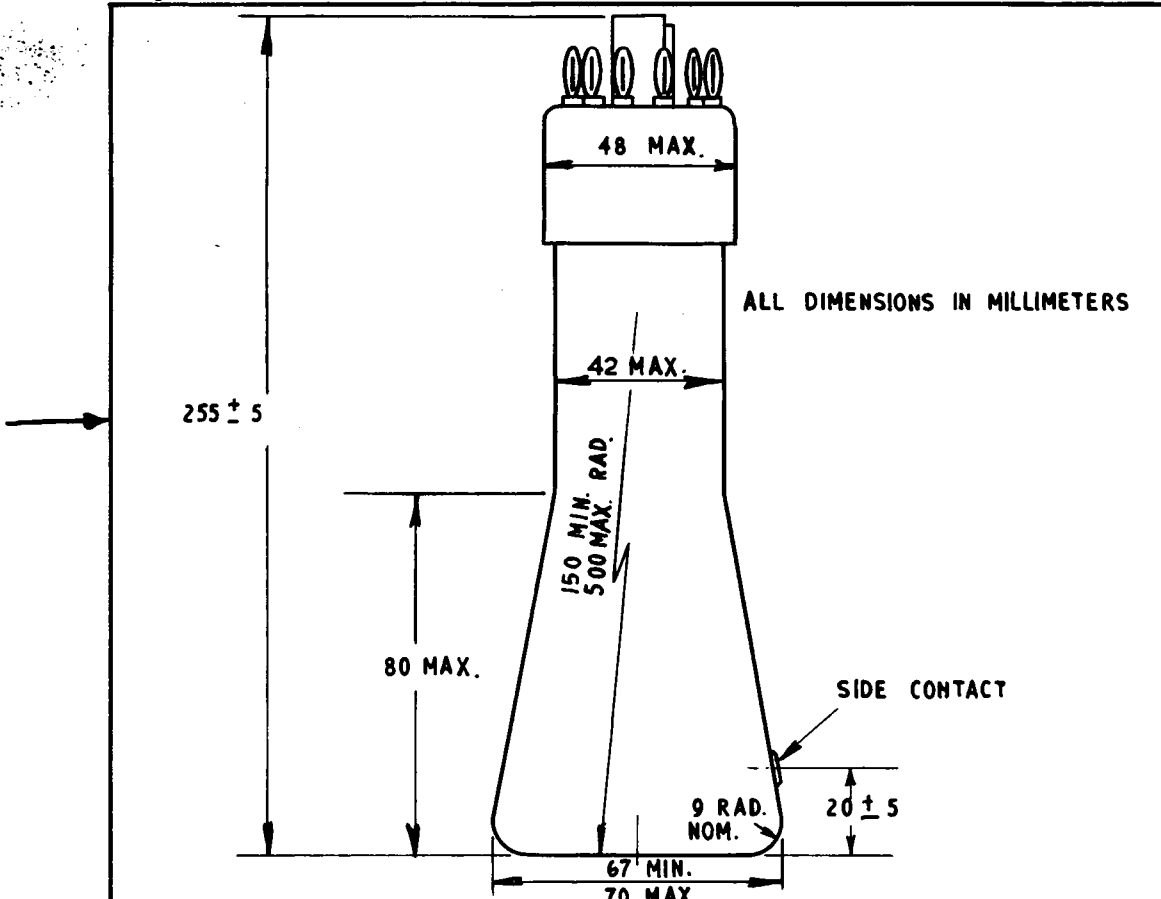

NOTES

- 1 VIEWING THE SCREEN OF THE TUBE WITH THE KEY OF THE BASE UPPER - MOST, A POSITIVE POTENTIAL APPLIED TO PIN X₂ SHALL DEFLECT THE SPOT TO THE RIGHT, AND A POSITIVE POTENTIAL APPLIED TO PIN Y₂ SHALL DEFLECT THE SPOT DOWNWARDS.
- 2 THE INTERNAL CONDUCTIVE COATINGS SHALL BE OF SUCH DIMENSIONS THAT THEY FUNCTION EFFECTIVELY BUT DO NOT OBSCURE THE USEFUL SCREEN AREA.