

E I M A C
 Division of Varian
 SAN CARLOS
 CALIFORNIA

3CV30,000H3

MEDIUM-MU
 VAPOR-COOLED
 POWER TRIODE

The EIMAC 3CV30,000H3 is a vapor-cooled, ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its vapor-cooled anode is conservatively rated at 30 kilowatts of plate dissipation when mounted in an EIMAC BR-200 boiler.


Full input of 60 kilowatts is permissible up to 100 megahertz. Large reserve emission is available from its one kilowatt filament and the grid structure is rated at one ampere making this tube an excellent choice for severe applications.

It is also recommended as an audio amplifier, a conventional plate-modulated amplifier or as a linear amplifier in new equipment designs.

GENERAL CHARACTERISTICS

ELECTRICAL

| | | | | |
|--|-------------|-------------|-------------|---------|
| Filament: Thoriated-Tungsten | <i>Min.</i> | <i>Nom.</i> | <i>Max.</i> | |
| Voltage - - - - - | | 6.3 | | V |
| Current - - - - - | 152 | | 172 | A |
| Amplification Factor - - - - - | | 20 | | |
| Interelectrode Capacitances, Grounded Cathode: | | | | |
| Grid-Filament - - - - - | 48 | | 58 | pF |
| Plate-Filament - - - - - | 1.2 | | 1.5 | pF |
| Grid-Plate - - - - - | 30 | | 38 | pF |
| Frequency for Maximum Ratings - - - - - | | | | 100 MHz |

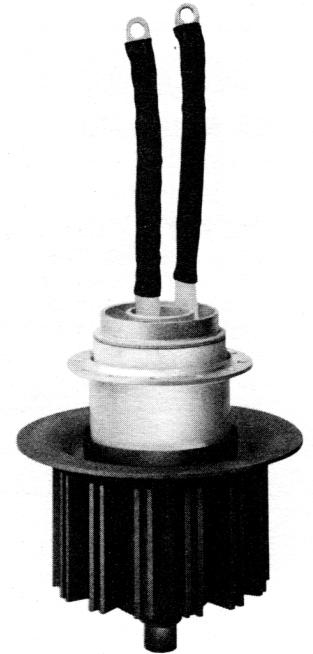

MECHANICAL

| | |
|----------------------------------|----------------------|
| Filament Connections - - - - - | Flexible Leads |
| Grid Connection - - - - - | Terminal Ring |
| Recommended Boiler - - - - - | EIMAC BR-200 |
| Operating Position - - - - - | Vertical, Base up |
| Cooling - - - - - | Vapor and Forced air |
| Maximum Operating Temperatures: | |
| Ceramic-to-metal Seals - - - - - | 250°C |
| Maximum Dimensions: - - - - - | See Outline |
| Net Weight - - - - - | 18 pounds |

RF INDUSTRIAL OSCILLATOR

Class-C (Filtered DC Power Supply)

MAXIMUM RATINGS

| | |
|-----------------------------|--------------|
| DC PLATE VOLTAGE - - - - - | 10,000 VOLTS |
| DC PLATE CURRENT - - - - - | 6.0 AMPS |
| DC GRID CURRENT - - - - - | 1.0 AMPS |
| PLATE INPUT POWER - - - - - | 60 KW |
| PLATE DISSIPATION - - - - - | 30 KW |

TYPICAL OPERATION

| | | | |
|--------------------------------------|------|--------|-------|
| DC Plate Voltage - - - - - | 7000 | 10,000 | volts |
| DC Plate Current - - - - - | 6.0 | 6.0 | amps |
| DC Grid Voltage - - - - - | -600 | -800 | volts |
| DC Grid Current - - - - - | .66 | .315 | amps |
| Peak Positive Grid Voltage - - - - - | 440 | 360 | volts |
| Driving Power - - - - - | 660 | 365 | watts |
| Plate Input Power - - - - - | 42 | 60 | kW |
| Plate Dissipation - - - - - | 12 | 18 | kW |
| Plate Output Power - - - - - | 30 | 42 | kW |
| Approximate Load Impedance - - - - - | 600 | 750 | ohms |

**RADIO-FREQUENCY POWER AMPLIFIER****PLATE-MODULATED**

Class-C

MAXIMUM RATINGS

| | | | |
|-------------------|-----------|------|-------|
| DC PLATE VOLTAGE | - - - - - | 7000 | VOLTS |
| DC PLATE CURRENT | - - - - - | 5.0 | AMPS |
| PLATE DISSIPATION | - - - - - | 20 | KW |
| GRID DISSIPATION | - - - - - | 500 | WATTS |

TYPICAL OPERATION

| | | | | |
|--------------------|---------|------|------|-------|
| DC Plate Voltage | - - - - | 5000 | 7000 | volts |
| DC Grid Voltage | - - - - | -600 | -820 | volts |
| DC Plate Current | - - - - | 5.0 | 5.0 | amps |
| DC Grid Current | - - - - | 600 | 600 | mA |
| Driving Power | - - - - | 600 | 750 | watts |
| Plate Output Power | - - - - | 17.8 | 27.5 | kW |

AUDIO AMPLIFIER**OR MODULATOR**Class-AB₂MAXIMUM RATINGS

| | | | |
|-------------------|-----------|--------|-------|
| DC PLATE VOLTAGE | - - - - - | 10,000 | VOLTS |
| DC PLATE CURRENT | - - - - - | 6.0 | AMPS |
| PLATE DISSIPATION | - - - - - | 30 | KW |
| GRID DISSIPATION | - - - - - | 500 | WATTS |

TYPICAL OPERATION (two tubes)

| | | | | |
|--------------------------------|---------|------|------|-------|
| DC Plate Voltage | - - - - | 6000 | 9600 | volts |
| DC Grid Voltage* | - - - - | -280 | -480 | volts |
| Zero-Sig Plate Current | - - - | .5 | .25 | amps |
| Max-Sig DC Plate Current | - - | 4.2 | 3.1 | amps |
| Max-Sig DC Grid Current | - - | 145 | 42 | mA |
| Peak Driving Voltage | - - - | 480 | 590 | volts |
| Drive Power | - - - - | 140 | 50 | watts |
| Plate-to-Plate Load Resistance | - - - - | 1300 | 2740 | ohms |
| Power Output | - - - - | 31 | 36 | kW |

Note: "TYPICAL OPERATION" data are obtained by calculation from published characteristic curves. No allowance for circuit losses has been made.

APPLICATION**ELECTRICAL**

Filament The rated filament voltage for the 3CV30,000H3 is 6.3 volts. Filament voltage, as measured at the socket, must be maintained at 6.3 volts plus or minus five percent for maximum tube life and consistent performance.

Control Grid Operation The grid current rating is one ampere dc. This value should not be exceeded for more than very short periods such as during tuning and over-current protection in the grid circuit should be provided. Ordinarily it will not be necessary to operate with more than 0.4 to 0.6 amperes grid current to obtain reasonable efficiency. In industrial heating service with varying loads, grid current should be monitored continuously with a dc current meter. The maximum grid dissipation rating is 500 watts.

Plate Operation The maximum plate input power rating is 60 kilowatts at 10,000 volts and 6.0 amperes dc. This rating applies for Class C amplifier or oscillator service and for Class AB applica-

tions. When used as a plate modulated rf amplifier, input is reduced to 7000 volts at 5.0 amperes dc. Maximum input may be exceeded for short periods during tuning without exceeding plate dissipation ratings.

Plate over-current protection should be provided to remove plate voltage quickly in the event of an overload or an arc-over at the load. In addition, current limiting power supply resistors should be used. These precautions are especially important in industrial service with its wide variations in loading.

Spark gaps from plate to ground should be used to prevent transient voltages from flashing across the tube envelope during any fault conditions.

Special Application If it is desired to operate this tube under conditions widely different from those given here, write to Power Grid Tube Division, EIMAC Division of Varian, 301 Industrial Way, San Carlos, California, for information and recommendations.

MECHANICAL

Mounting The 3CV30,000H3 must be mounted vertically, base up in an EIMAC BR-200 boiler. It is very important that the boiler tube assembly be mounted vertically, the water be maintained at the suggested level, and that the flange of the tube makes a vapor-tight seal against the rubber "O" ring and boiler.


Cooling Cooling is accomplished by immersion of the anode in a distilled water-filled BR-200 boiler. The energy dissipated at the anode causes the water to boil and be converted into steam. Steam is carried away by convection to the condenser where it is cooled and condenses into water. Condensate is then returned to the boiler.


The boiling action maintains the anode surface temperature at approximately 100°C . In a properly designed system (such as the 3CV30,000H3 and BR-200) it is unlikely that anode surface temperature will ever exceed 125°C — well below the rated maximum for the tube — even at full plate dissipation levels.

The water in the boiler must be maintained at a constant level, just below the top of the anode fins. This level is marked on the boiler. A recommended system for assuring constant water level is shown in the system diagram below. This system incorporates an EIMAC CB-202 Control Box to sense water level and a small reservoir to supply make-up water on demand. In the event of a drop in system water level, a switch is closed in the control box, energizing a solenoid water valve in the line from the reservoir. When the make-up water brings the system back to the proper level, the switch is opened, de-energizing the solenoid valve. A second switch in the CB-202 Control Box senses a lower, danger level and can be used to actuate an alarm or shut down the system.

For reliable operation, it is essential that the Control Box be mounted so that the level sensed is the actual level in the boiler.

Separate cooling of the tube base is required and is accomplished by directing 100 CFM of cooling air into the base structure from the top of the socket.

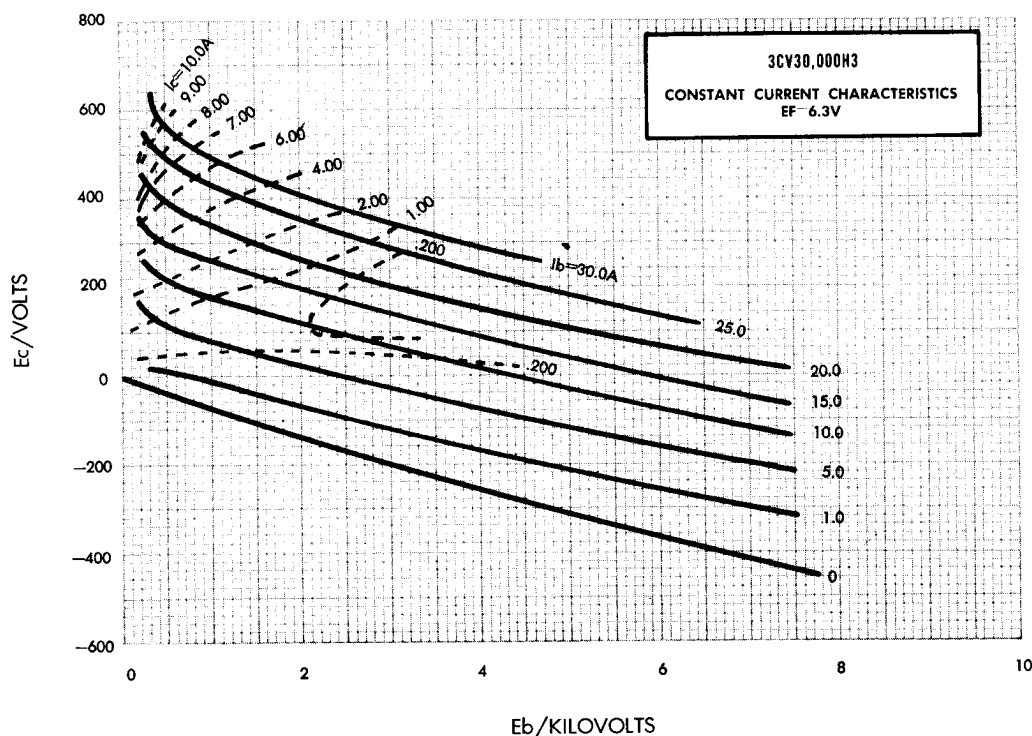

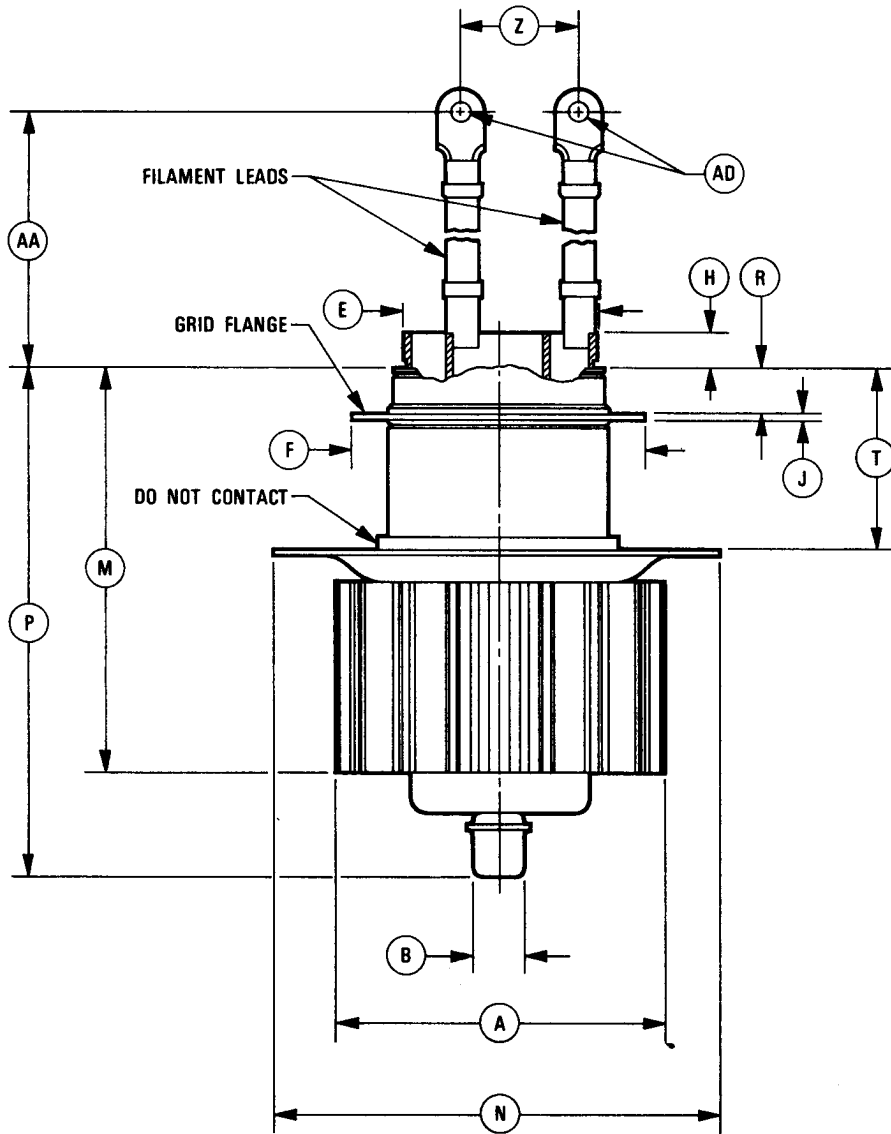

DIMENSIONS IN INCHES

DIMENSIONAL DATA

| DIM. | MIN. | MAX. | REF. |
|------|-------|-------|-------|
| A | | | 5.812 |
| B | .855 | .895 | |
| E | 3.230 | 3.270 | |
| F | 5.030 | 5.090 | |
| H | .530 | .700 | |
| J | | | .125 |
| M | 6.643 | 6.775 | |
| N | | | 7.750 |
| P | 8.400 | 8.625 | |
| R | .700 | .860 | |
| S | | | .510 |
| T | | | 2.806 |
| V | | | .265 |
| Z | | | 2.000 |
| AA | 8.500 | 9.000 | |
| AD | | | .390 |

NOTE:

REF. DIMS. ARE FOR INFO. ONLY & ARE NOT REQ'D. FOR INSP. PURPOSES.

