## DIAMETER 6" NOMINAL

## 6EB7

## Oscilloscope Tube

ELECTROSTATIC FOCUS ELECTROSTATIC DEFLECTION

Suitable for Assymetrical Deflection


## DATA

CENEDAL.

GENERAL:						
Heater: Voltage .		4.0				a.c. or d.c. volts.
Current .		1.0	:	•		amp.
Direct Inter-electrode C	apacitar	ices	•	•	•	amp.
Modulator to all other electrodes 25μμf.						
Each X Plate to all other	er electro	odes	:		•	25μμf.
Each Y Plate to all other	er electri	odes			•	25μμf.
One X to one Y Deflect	or Plate	e .	:		•	2.5µµf.
Cathode to all other ele			•	•	٠	2.5μμ1. 15μμf.
Screen:	•••••	•	•	•	•	τομμι.
Fluorescence						Blue.
Persistence		•		•	•	Very Short.
		. sec. t	nav	for	10/	initial brightness).
Focusing Method .		. 300. 1	nax.	101	1 /0	Electrostatic.
Deflecting Method .		•	•	•		Electrostatic.
		•	•	•	•	421 ± 10 mm.
Overall Length Greatest Diameter of B Minimum Useful Screen	nİb	•	•	•	•	163 mm.
Minimum Useful Screen	n Diame	ter.	•	•	•	130 mm.
Mounting Position		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	•	•	•	Any.
Base	•	•	•	•		B.12.D.
	•	•	•	•	•	D.12.D.
Pin 1—Modulator.	(E	(7)			Pin	8Y2.
Pin 2—Cathode.	(5)		8)			19X2.
Pin 3—Heater.	4 / K	<u></u> X			-	· · · · · · · · · · · · · · · · · · ·
Pin 4—Heater.	AVE.		<b>P</b>		Int	10—Anode 3 and ernal Conductive
Pin 5—Anode 1.	(3) \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		10			ting.
	X	$\triangle /\!\!/$	$\angle$		Pin	11-X1.
Pin 6—Anode 2.	2	12	11)			12—Y1.
Pin 7—No connection.	Ć.				1 41	112—11.
Typical Operating Cond	itions :					
Anode 1		2000	volts			2000 volts.
Anode 2						530 volts.
Anode 2 Anode 3 (6000v. max.)		5000	volts			3000 volts.
Modulator volts for cut	-off					0000 10100
	-45 te	o –80 v	volts			-45 to -80 volts.
<b>Deflection Sensitivity:</b>		mm/	volt.			mm/volt.
X Plate	0.130				0.215	
Y Plate		0.1				0.215
		0.2	.50			0.713

- Note 2. The angle between the trace produced by X1 and X2 and the trace produced by Y1 and Y2 is  $90^{\circ} \pm 3^{\circ}$ .
- Note 3. The undeflected focused spot will fall within a circle having a 10 mm. radius concentric with the centre of the tube face.



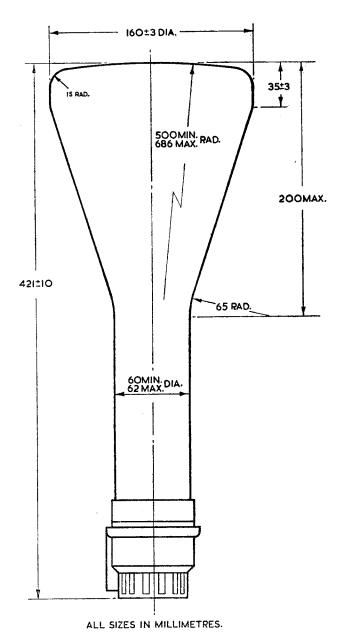

Note 1. When viewing the screen with the tube positioned such that the base spigot is uppermost, a positive voltage applied to the terminal X1 will deflect the spot to the left and a positive voltage applied to the terminal Y1 will deflect the spot upwards.