

# GENERAL ELECTRIC

## INDUSTRIAL AND MILITARY CATHODE RAY TUBES

### 12AS P7, P14, P19, P25 CATHODE RAY TUBE

12-INCH ROUND GLASS	POST ACCELERATION
FOCUS -- ELECTROSTATIC	PERSISTENCE -- LONG
DEFLECTION -- ELECTROSTATIC	ALUMINIZED SCREEN

---

### DESCRIPTION AND RATING

---

The 12AS' is a cathode ray tube for radar and oscillographic applications. Features of this tube are post-acceleration which assures maximum deflection sensitivity with high brightness and an aluminized screen to increase light output, reduce undesirable screen charging, and prevent ion-spot blemish.

#### GENERAL

##### ELECTRICAL

Heater Voltage . . . . .	6.3	Volts
Heater Current . . . . .	0.6 ± 10%	Amperes

Focusing Method -- Electrostatic  
Deflecting Method -- Electrostatic

##### Direct Interelectrode Capacitances, approximate

Cathode to All Other Electrodes . . . . .	6.0	µmf
Grid-No. 1 to All Other Electrodes . . . . .	7.5	µmf
D1 to D2 . . . . .	4.0	µmf
D3 to D4 . . . . .	3.0	µmf
D1 to All Other Electrodes . . . . .	12.0	µmf
D2 to All Other Electrodes . . . . .	12.0	µmf
D3 to All Other Electrodes . . . . .	6.5	µmf
D4 to All Other Electrodes . . . . .	6.5	µmf

##### OPTICAL

Phosphor Number	P7	P14	P19	P25
Fluorescent Color	Blue-White	Purple	Orange	Orange
Phosphorescent Color	Yellow	Orange	Orange	Orange
Persistence	Long	Medium Long	Long	Long

# GENERAL ELECTRIC

## INDUSTRIAL AND MILITARY CATHODE RAY TUBES

12ASP-  
Page 2  
4-7-61

### MECHANICAL

Over-all Length . . . . . 22-3/4 ± 3/8 Inches  
 Greatest Bulb Diameter . . . . . 12-7/16 + 1/16 - 3/32 Inches  
 Minimum Useful Screen Diameter . . . . . 11.0 Inches  
 Neck Contacts - Small Ball Caps, JETEC No. J1-25  
 Bulb Contact - Recessed Small-cavity Cap., JETEC No. J1-22  
 Base - Medium Shell Dihepthal - JETEC No. B12-37

#### Bulb Contact Alignment

J1-22 Contact Aligns with Trace D3-D4 ± 10 Degrees

#### Base Alignment

Pin No. 11 aligns with J1-22 contact ± 10°

#### Neck Contact Alignment

D1-D2 Trace Aligns With Neck Button (A2) and Tube Axis ± 10 Degrees.

Positive Voltage on D1 Deflects Beam Approximately Away from A2.

Positive Voltage on D3 Deflects Beam Approximately Away from Post Accelerator Button.

#### Trace Alignment

Angle Between D3-D4 and D1-D2 Traces . . . . . 90 ± 1 Degrees

Mounting Position -- Any

### RATINGS

#### DESIGN CENTER VALUES \*

Post-Accelerator Voltage . . . . . 16,000 Max Volts DC  
 Anode Voltage + . . . . . 8,000 Max Volts DC  
 Ratio-Post Accelerator Voltage to Anode Voltage . . . . . 2.5 Max  
 Anode Input ++ . . . . . 6 Max Watts  
 Focusing-Electrode Voltage . . . . . 3,000 Max Volts DC  
 Grid No. 2 Voltage . . . . . 700 Max Volts DC

#### Grid-No. 1 Voltage

Negative-Bias Value . . . . . 300 Max Volts DC  
 Positive-Bias Value . . . . . 0 Max Volts DC  
 Positive-Peak Value . . . . . 2 Max Volts

#### Peak Heater-Cathode Voltage

Heater Negative With Respect to Cathode . . . . . 180 Max Volts  
 Heater Positive With Respect to Cathode . . . . . 180 Max Volts  
 Peak Voltage Between Anode and Any Deflecting Electrode. 1,500 Max Volts

### TYPICAL OPERATING CONDITIONS

Post Accelerator Voltage . . . . . 9,700 Volts DC  
 Anode Voltage . . . . . 6,100 Volts DC

# GENERAL ELECTRIC

INDUSTRIAL AND MILITARY CATHODE RAY TUBES 12ASP-  
Page 3  
4-7-61

## TYPICAL OPERATING CONDITIONS (Cont'd)

Focusing-Electrode Voltage . . . . .	1,750 to 2,220	Volts DC
Grid No. 2 Voltage . . . . .	300	Volts DC
Grid No. 1 Voltage $\#$ . . . . .	-40 to -77	Volts DC
Modulation Factor $\pi$ . . . . .	30	Max Volts
 Deflecting Factors		
D1 and D2 . . . . .	115 to 135	Volts DC Per Inch
D3 and D4 . . . . .	115 to 135	Volts DC Per Inch
 Focusing Electrode for any Operating Condition . . .		
Spot Position undeflected $\emptyset$ . . . . .	-15 to +10	Microamperes
Line Width A $\triangle$ . . . . .	within a 20	Millimeter Square
	.5	Max Millimeters

## CIRCUIT VALUES


Grid No. 1 Circuit Resistance . . . . .	2.0	Max Megohms
Resistance in any Deflecting Electrode Circuit $\diamond$ . . . . .	5.0	Max Megohms

- \* The maximum ratings provide a ten percent safety factor in accordance with the standard design-center system of rating cathode ray tubes. The tube will withstand the combined effects of variations in line voltage and components provided the maximum design-center values are not exceeded by more than ten percent.
- + Anode, Grid No. 2 and Grid No. 4 which are connected together within the tube are referred to herein as anode.
- ++ Anode input equals the product of anode voltage and average current measured at the terminal.
- $\#$  For visual extinction of focused undeflected spot.
- $\pi$  For a Ib3 of 25 microamperes d-c in accordance with MIL-E-1 specification.
- $\emptyset$  With post-accelerator anode voltage of 9,700 volts, the center of the focused undeflected spot will lie within a square of 20 millimeters radius centered on the tube face.
- $\triangle$  Measured with specification MIL-E-1, paragraph 4.12.6.1, at an anode No. 3 (post-acceleration) current of 25 microamperes d.c.
- $\diamond$  It is recommended that the deflection electrode resistance be approximately equal.


Cathode Ray Tube Department

GENERAL ELECTRIC COMPANY

Syracuse, N.Y.

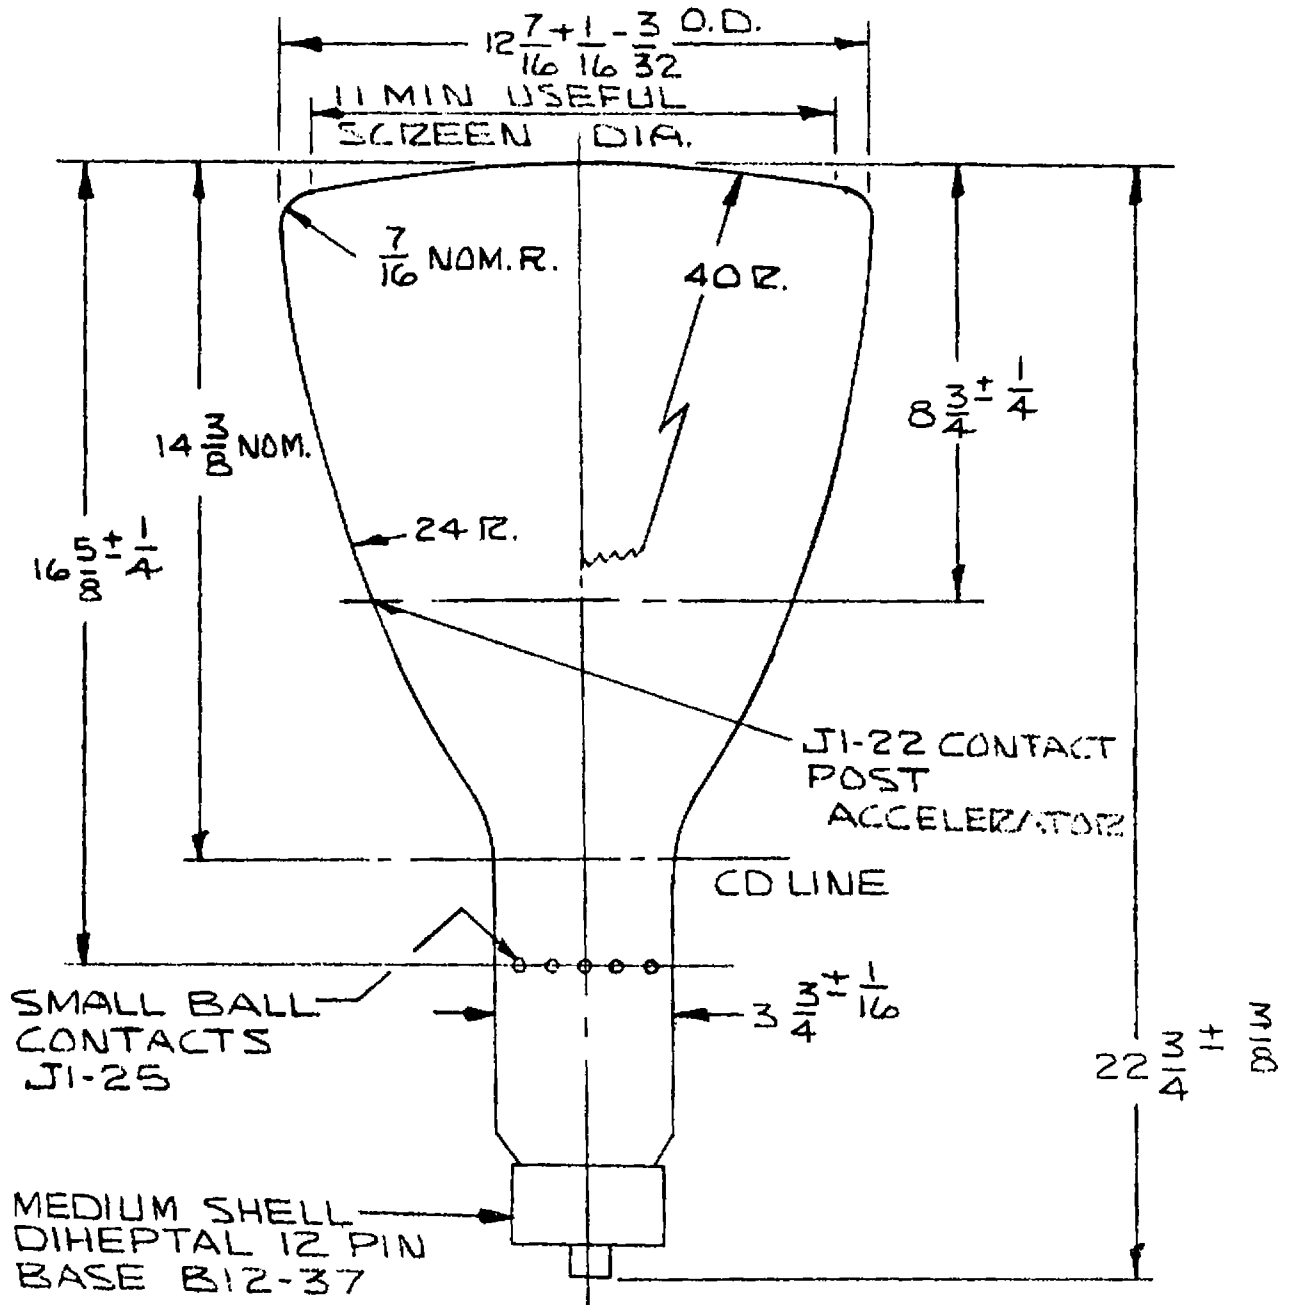

12ASP---

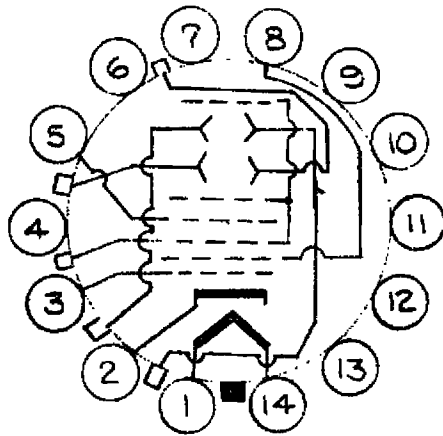


BASING DIAGRAM

12ASP---

<u>PIN NO.</u>	<u>ELEMENT</u>
1	HEATER
2	CATHODE
3	GRID NO.1
5	FOCUSING ELECTRODE
8	GRID NO.2
14	HEATER

ANODE CONTACT  
11-22

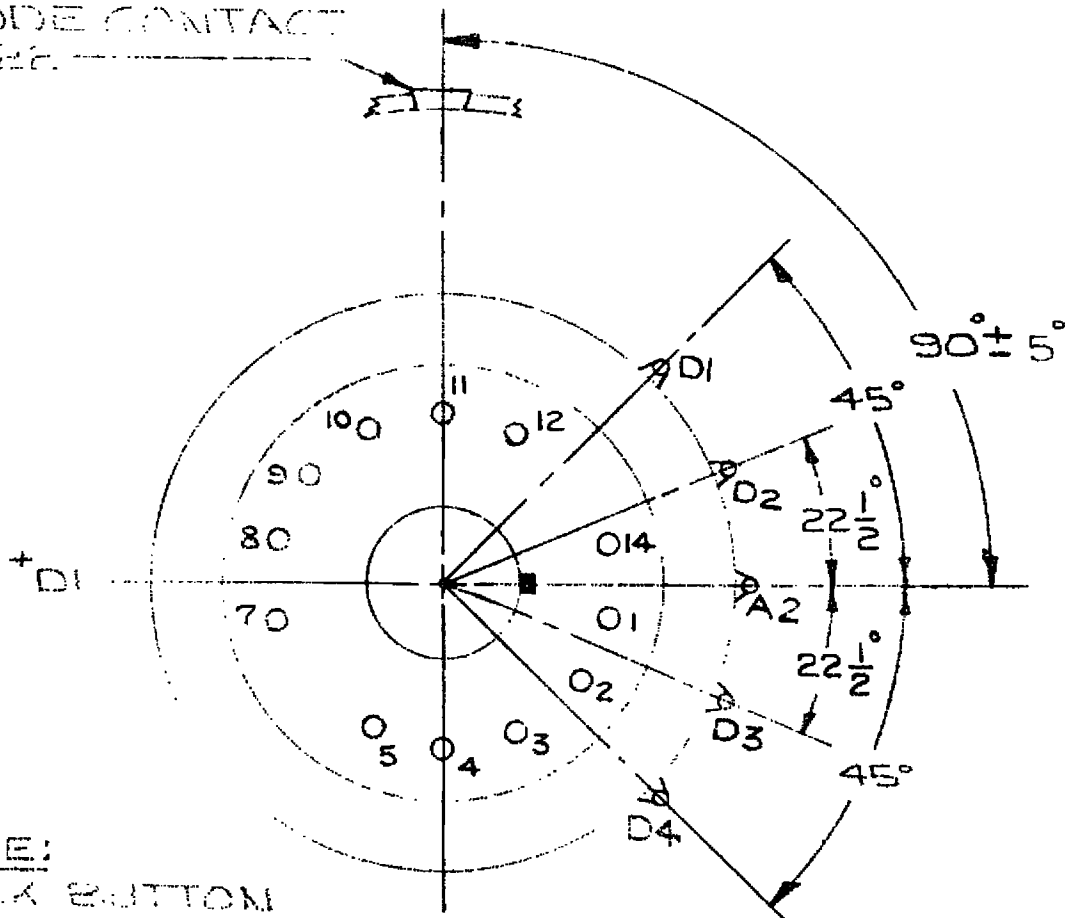

NOTE:  
CHECK BOTTOM  
DIMENSIONS TO  
CENTERS AT 4512- +D3  
FOR ONE OF 1813.

BOTTOM VIEW