

SPECIFICATION MOS/CV4093

ISSUE 1, DATED 8.1.59

AMENDMENT No. 1.

Page 2, Group A

Add a new test as follows:-

Test	Test Conditions	AQL	Insp. Level	Symbol	Limits		Units
					max.	min.	
Contact Potential	Vf = 1.25 V Va = Vg2 = 0 Vg1 = 1.8 V through 200 k		100%	+ Igl		0.25	uA

Page 4, Group F, Life Test End Point 1,000 hours.

Add a new test as follows:-

Contact Potential	As in Group A			+ Igl	To be recorded	uA
-------------------	---------------	--	--	-------	----------------	----

May, 1959.

T.V.C. for S.R.D.E.

Z.19201.

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION MOS/CV 4093

ISSUE 1 DATED 8.1.59

AMENDMENT NO. 2

Page 2 GROUP D, Capacitance

On bottom line of page, in column headed "Limits Min."

Amend figure against "C_{out}" from 3.7 to 3.5.

May 1960.
N.17175/D.

T.V.C. for S.R.D.E.

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION MOS/CV4093

ISSUE 1 DATED 8.1.1959

AMENDMENT NO. 3

Page 3 GROUP D (Continued)

Functional Test.

In remark at right hand side of page delete "A40 and"

December 1960

T.V.C. for S.R.D.E.

N 46654/D

ELECTRONIC VALVE SPECIFICATION

CV4093 Issue 1 dated 8.1.59

AMENDMENT No. 4

Page 1 Base

Delete:- See Appendix I to CV2237

Dimensions

Delete:- See Appendix I to CV2237

Signals Radio Development
Establishment.

DECEMBER 1961

(7732)

Specification MCS/CV4093 Issue 1, Dated 8.1.59 To be read in conjunction with K.1001, BS448 and BS1409	<u>SECURITY</u>	
	<u>Specification</u> Unclassified	<u>Valve</u> Unclassified

—————> Indicates a change

Type of Valve - Reliable H.F. Beam Tetrode Sharp Cut Off Cathode - Directly Heated Envelope - Glass Metallised Prototype - VX9185			<u>MARKING</u>		
			See K.1001/4, except that the valve shall only be marked with the CV Number Factory and Date Code.		
<u>RATING</u> (All limiting values are absolute)			<u>BASE</u>		
			See App. 1 to CV 2237 BS 448/B5G/F		
			<u>CONNECTIONS</u>		
			<u>PIN</u>	<u>ELECTRODE</u>	
			1	a (red dot)	
			2	^{S2}	
			3	f (-), bp ₁ , M	
			4	^{S1}	
			5	f (+), bp ₂	
<u>Typical Operating Conditions</u>			<u>DIMENSIONS</u>		
Measured at $V_a = V_{g2} = 67.5V$ $V_{g1} = 0, R_{g1} = 5 M\Omega$			See App. 1 to CV 2237 See BS448/B5G/F Size Ref. No. 1		
Anode Current (mA) 1.8			<u>Dimensions</u> (millimetres)		
Screen Current (mA) 0.5					
Mutual Conductance (mA/V) 1.1			Min.	Max.	
<u>Capacitances</u> (pF)					
C _{in} (nom.) 3.7					
C _{out} (nom.) 4.6					
C _{a, g1} (max.) 0.01					
			<u>MOUNTING POSITION</u> ANY		
			A. Overall Length 38.15		
			Diameter		
			B. Minor 7.264		
			C. Major 9.804		
			Lead Length 38.1		

TESTS

To be performed in addition to those applicable in K.1001. Tests shall be performed in the specified order unless otherwise agreed with the Inspecting Authority.


Test conditions - unless otherwise specified								
		Vf(V)	Va(V)	Vg ₂ (V)	Vg ₁ (V)	Rg ₁ (Megohms)		
		1.25	67.5	67.5	0	5		
K.1001 Ref.	Test	Test Conditions	AQL %	Insp. Level	Sym- bol	Limits		Units
						Min.	Max.	
7.1	Glass Strain	No voltages	6.5	I				
	<u>GROUP A</u>							
	Electrode Insulation	Vg ₁ - all = -100V Vg ₂ - all = -100V Va - all = -100V Vf = 0		100% 100% 100%	R R R	100 100 100		MΩ MΩ MΩ
	Reverse Grid Current	Vg ₁ = -0.5V Rg ₁ = 0.1 MΩ max.		100%	Ig ₁	-	0.5	μA
	<u>GROUP B</u>	Combined AQL	1.0	II				
	Filament Current		0.65	II	If	18	22	mA
	Anode Current		0.65	II	Ia	1.2	2.4	mA
	Screen Grid Current		0.65	II	Ig ₂	0.35	0.7	mA
	Mutual Conductance (1)	Note 1	0.65	II	gm	0.75	1.45	mA/V
	<u>GROUP C</u>	Combined AQL	4.0	I				
	Mutual Conductance (2)	Note 1 Vf = 1.0V	2.5	I	gm	0.60	1.45	mA/V
	Mutual Conductance (3)	Note 1 Vf = 1.0V Take reading after 15 minutes	2.5	I	gm	0.60	1.45	mA/V
5.12	<u>GROUP D</u>							
	Lead Fragility		6.5	IA				
	Filament Anode Short	Note 2		T.A.				
	Capacitance	Measured on a 1 Mc/s bridge with the valve mounted in a fully screened socket. No shield.	6.5	IC	Ca, G ₁ C _{in} C _{out}	0.01 3.0 3.7	0.01 4.4 5.5	pF pF pF

K.1001 Ref.	Test	Test Conditions	AQL %	Insp. Level	Sym- bol	Limits		Units
						Min.	Max.	
	<u>GROUP D</u> (Cont'd) Functional Test							
				T.A.			The valves shall operate satisfactorily in W.S. A40 and A41.	
11.3	<u>GROUP E</u> Fatigue <u>Post Fatigue Tests</u>	Acceleration = 5g peak min. Time = 99 hrs. Note 3		IA				
	Mutual Conductance (1)	Note 1	2.5		gm	0.60		mA/V
11.4	Shock <u>Post Shock Tests</u>	Hammer Angle 30° No voltages		IA				
	Mutual Conductance (1)	Note 1	2.5		gm	0.60		mA/V
A VI/ 5	<u>GROUP F</u> Life							
A VI/ 5.1	<u>Stability Life Test</u> Mutual Conductance (2)	Note 1 Vf = 1.0V	1.0	I	gm	0.60		mA/V
A VI/ 5.3	<u>Intermittent Life Test</u> <u>Life Test End Point</u> (500 hrs.)	Combined AQL	6.5	IA				
A VI/ 5.6	Inoperatives Mutual Conductance (1) Electrode Insulation	Note 1 Vf = 0 Vg ₁ - all = -100V Vg ₂ - all = -100V Va - all = -100V	2.5 2.5 4.0			gm	0.60	mA/V MΩ MΩ MΩ

K.1001 Ref.	Test	Test Conditions	AQL %	Insp. Level	Sym- bol	Limits		Units
						Min.	Max.	
A VI/ 5.6	<u>GROUP F</u> (Cont'd)							
	<u>Life Test</u> <u>End Point</u> 1,000 hrs.	Combined AQL	10	IA				
	Inoperatives		4.0					
	Mutual Conductance (1)	Note 1	4.0		gm	0.60		mA/V
	Reverse Grid Current	As in Group A	4.0		Ig ₁	-	1.0	μA
Electrode Insulation	Vf = 0 Vg ₁ - all = -100V Vg ₂ - all = -100V Va - all = -100V		6.5		R	30	MΩ	
					R	30	MΩ	
					R	30	MΩ	
A IX/ 2.4 & 2.5	<u>GROUP G</u> Electrical Retest after 28 days holding period			100%				
A VI/ 5.6	Inoperatives		0.5					
	Mutual Conductance (1)	Note 1			gm	0.75	1.45	mA/V
	Reverse Grid Current	As in Group A	0.5		Ig ₁	-	0.5	μA

NOTES

1. Test in circuit

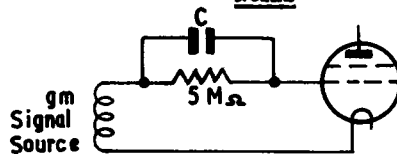

Bypass capacity C shall have a resistance of less than 20,000 ohms at the test frequency.

2. Raise V_f until filament opens. Test for filament to anode short only. After performance of the filament burn out test, if the short circuit shall pass in excess of five times the rated filament current without burning out the short circuit, the valve shall be deemed a failure. This test shall be performed by a Service Laboratory on three valves which shall be in addition to the required number for Type Approval samples. Manufacturer's data are not required for this test.
3. Filament voltage and H.T. voltage are switched simultaneously 1 min. on 3 min. off throughout the duration of the test. Frequency = 170 cps. The valves to be vibrated in each of three mutually perpendicular planes in turn for periods of 30, 30 and 39 hours. One plane to include the longitudinal axis of the valve.