




OUTPUT TRIODE
 TRIODE DE SORTIE
 ENDTRIODE

Heating : direct by A.C.;
 parallel supply
 Chauffage: direct par C.A.;
 alimentation en parallèle $V_f = 7,2$ V
 Heizung : direkt durch Wechselstrom;
 Parallelspeisung $I_f = 1,1$ A



Capacities
 Capacités
 Kapazitäten

$C_{ag} = 3$ pF

Operating conditions class A
 Caractéristiques d'utilisation classe A
 Betriebsdaten Klasse A

V_a	=	800	V
V_g	=	-90	V
I_a	=	35	mA
S	=	2,3	mA/V
μ	=	7	-
R_i	=	3	k Ω
R_a	=	11	k Ω
V_i ($I_g = +0,3 \mu A$)	=	60	V_{eff}
W_o ($I_g = +0,3 \mu A$)	=	9	W
d ($I_g = +0,3 \mu A$)	=	5	%

4624*"Miniwatt"*

Operating conditions class B
 Caractéristiques d'utilisation classe B
 Betriebsdaten Klasse B

V_a	=	800	V
V_g	=	-92	V
$R_{aa'}$	=	10	k Ω
V_i	=	0 ————— 60	V_{eff}
I_a	=	2x30 ————— 2x59	mA
W_o	=	0 ————— 30	W
d	=	- ————— 1,1	%

Operating conditions class AB
 Caractéristiques d'utilisation classe AB
 Betriebsdaten Klasse AB


V_a	=	800	V
R_k	=	1,1	k Ω
$R_{aa'}$	=	15	k Ω
V_i	=	0 ————— 63	V_{eff}
I_a	=	2x40 ————— 2x44	mA
W_o	=	0 ————— 25	W
d	=	- ————— 1,1	%

Limiting values
 Caractéristiques limites
 Grenzdaten


V_{a_0}	= max.	1500	V
V_a	= max.	800	V
w_a	= max.	32	W
I_k	= max.	75	mA
$V_g (I_g = +0,3 \mu A)$	= max.	-7	V
R_g	= max.	1	M Ω

"Miniwatt"

4624

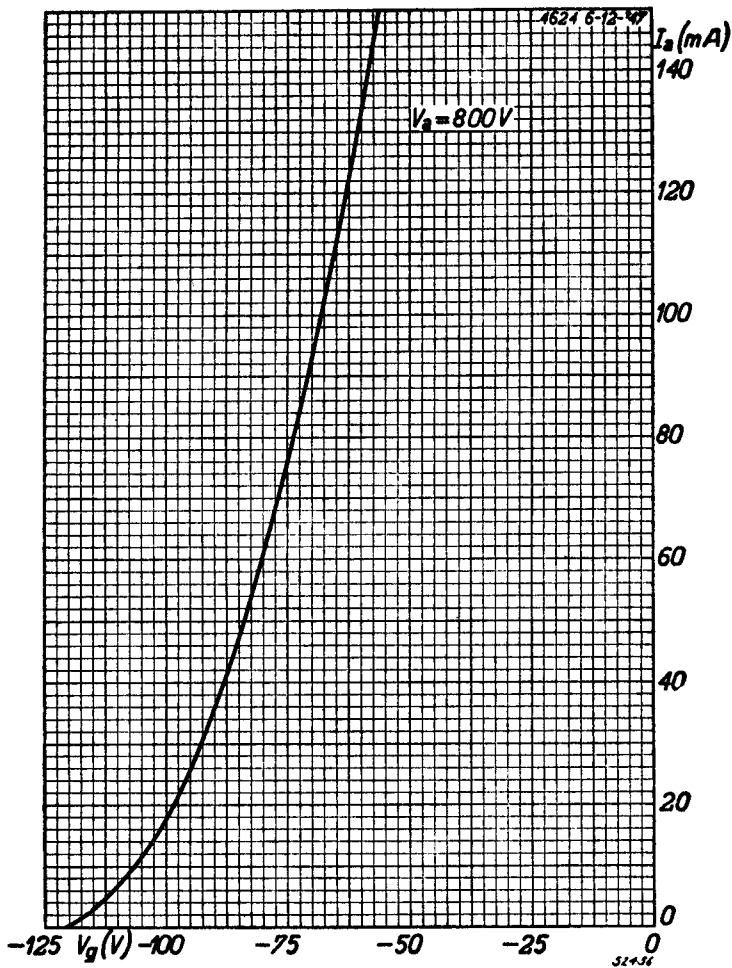

4624

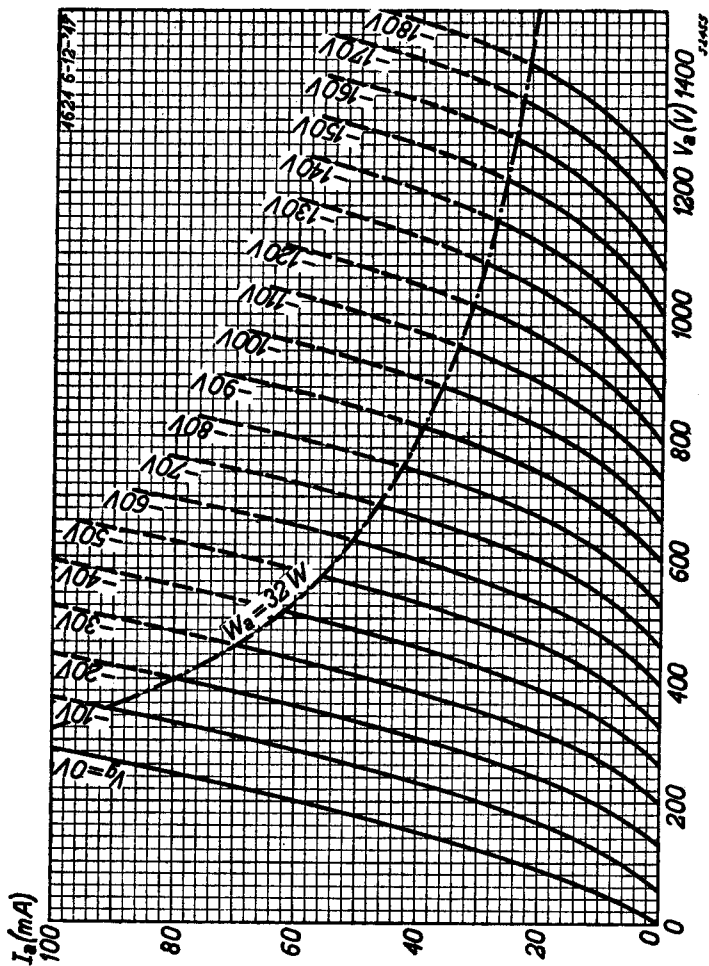"Miniwatt"

PHILIPS



*Electronic
Tube*

HANDBOOK

	4624	
page	sheet	date
1	1	1948.08.26
2	2	1948.08.26
3	3	1948.05.01
4	4	1948.05.01
5	FP	1999.06.07