

## High-Mu Triode

## NUVISTOR TYPE

For Use as Grounded-Cathode, Neutralized RF-Amplifier  
Tube in Tuners of VHF Television and FM Receivers

## GENERAL DATA

## Electrical:

|  |           |       |
|--|-----------|-------|
| Heater Characteristics and Ratings ( <i>Design-Maximum Values</i> ): |           |       |
| Voltage (AC or DC) . . . . .   | 6.3 ± 0.6 | volts |
| Current at heater volts = 6.3 . . . . .                              | 0.135     | amp   |
| Peak heater-cathode voltage:   |           |       |
| Heater negative with<br>respect to cathode. . . . .                  | 100 max.  | volts |
| Heater positive with<br>respect to cathode. . . . .                  | 100 max.  | volts |
| Direct Interelectrode Capacitances (Approx.):                        |           |       |
| Grid to plate . . . . .  | 0.92      | pf    |
| Grid to cathode, shell, and heater. . . . .                          | 4.3       | pf    |
| Plate to cathode, shell, and heater . . . . .                        | 1.8       | pf    |
| Plate to cathode. . . . .  | 0.18      | pf    |
| Heater to cathode . . . . .  | 1.6       | pf    |

Characteristics, Class A<sub>1</sub> Amplifier:

|   |      |       |
|---|------|-------|
| Plate Supply Voltage. . . . .                           | 110  | volts |
| Grid Supply Voltage . . . . .                           | 0    | volts |
| Cathode Resistor. . . . .                               | 130  | ohms  |
| Amplification Factor. . . . .                           | 65   |       |
| Plate Resistance (Approx.). . . . .                     | 6600 | ohms  |
| Transconductance. . . . .                               | 9800 | μmhos |
| Plate Current . . . . .                                 | 7    | ma    |
| Grid Voltage (Approx.) for plate $\mu_a = 10$ . . . . . | -4   | volts |

## Mechanical:

|                                 |  |
|---------------------------------|--|
| Operating Position. . . . .     | Any  |
| Type of Cathode . . . . .       | Coated Unipotential  |
| Maximum Overall Length. . . . . | 0.800"   |
| Maximum Seated Length . . . . . | 0.625"   |
| Maximum Diameter. . . . .       | 0.440"   |
| Envelope. . . . .               | Metal Shell MT4  |
| Socket. . . . .                 | Cinch Mfg. Corp. No. 133 65 10 001,<br>Industrial Electronic Hardware Co. No. Nu 5044<br>or No. Nu 5060, or equivalent |
| Base. . . . .                   | Medium Ceramic-Wafer Twelvar 5-Pin<br>(JEDEC No. E5-65)  |


← Indicates a change.



# 6CW4

Basing Designation for BOTTOM VIEW. . . . . 12AQ

- Pin 1<sup>a</sup> - Do Not Use
- Pin 2 - Plate
- Pin 3 - Same as Pin 1
- Pin 4 - Grid
- Pin 5 - Same as Pin 1
- Pin 6 - Same as Pin 1
- Pin 7 - Same as Pin 1
- Pin 8 - Cathode
- Pin 9 - Same as Pin 1
- Pin 10 - Heater
- Pin 12 - Heater



## AMPLIFIER — Class A<sub>1</sub>

### Maximum Ratings, Design-Maximum Values:

|   |  |       |
|---|--|-------|
| PLATE SUPPLY VOLTAGE. . . . .   | 300 <sup>b</sup> max.                                  | volts |
| → PLATE VOLTAGE . . . . .   | 135 max.   | volts |
| GRID VOLTAGE:   |  |       |
| Negative-bias value . . . . .   | 55 max.  | volts |
| Peak-positive value . . . . .   | 0 max.   | volts |
| CATHODE CURRENT . . . . .   | 15 max.  | ma    |
| → PLATE DISSIPATION:  |  |       |
| With a minimum series plate-circuit resistance of 5000 ohms . . . . . | 1.5 max.   | watts |
| For lower values of series plate-circuit resistance. . . . .          | See accompanying <i>Plate-Dissipation-Rating Chart</i> |       |

### Typical Operation:

|                                      |       |       |
|--------------------------------------|-------|-------|
| Plate Voltage . . . . .              | 70    | volts |
| Grid Supply Voltage . . . . .        | 0     | volts |
| Grid Resistor . . . . .              | 47000 | ohms  |
| Amplification Factor . . . . .       | 68    |       |
| Plate Resistance (Approx.) . . . . . | 5440  | ohms  |
| Transconductance. . . . .            | 12500 | μmhos |
| → Plate Current . . . . .            | 7.2   | ma    |



### Maximum Circuit Values:

|                                       |          |         |
|---------------------------------------|----------|---------|
| Grid-Circuit Resistance: <sup>c</sup> |          |         |
| For fixed-bias operation. . . . .     | 0.5 max. | megohm  |
| For cathode-bias operation. . . . .   | 2.2 max. | megohms |

- <sup>a</sup> pins of a length such that its end does not touch the socket insertion plane.
- <sup>b</sup> A plate supply voltage of 300 volts may be used provided sufficient plate-circuit resistance and agc voltage are used to limit the voltage at the plate of the tube to 135 volts under conditions of maximum-rated plate dissipation (1.5 watts).
- <sup>c</sup> for operation at metal-shell temperatures up to 135° C.

→ Indicates a change.



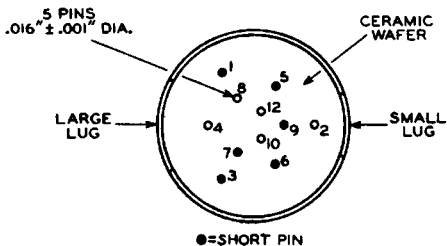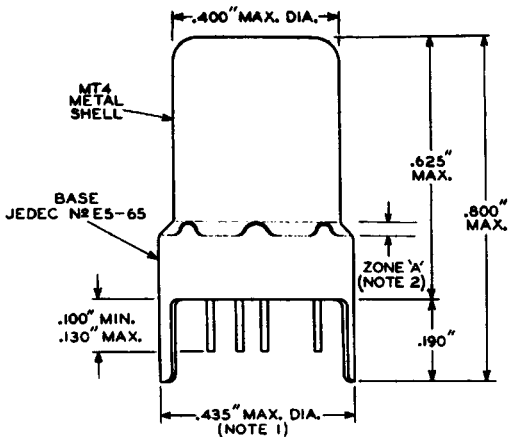


92CS-10970R3

**NOTE 1:** MAXIMUM OUTSIDE DIAMETER OF 0.440" IS PERMITTED ALONG 0.190" LUG LENGTH.

**NOTE 2:** SHELL TEMPERATURE SHOULD BE MEASURED IN ZONE "A" BETWEEN BROKEN LINES.




## PLATE-DISSIPATION-RATING CHART

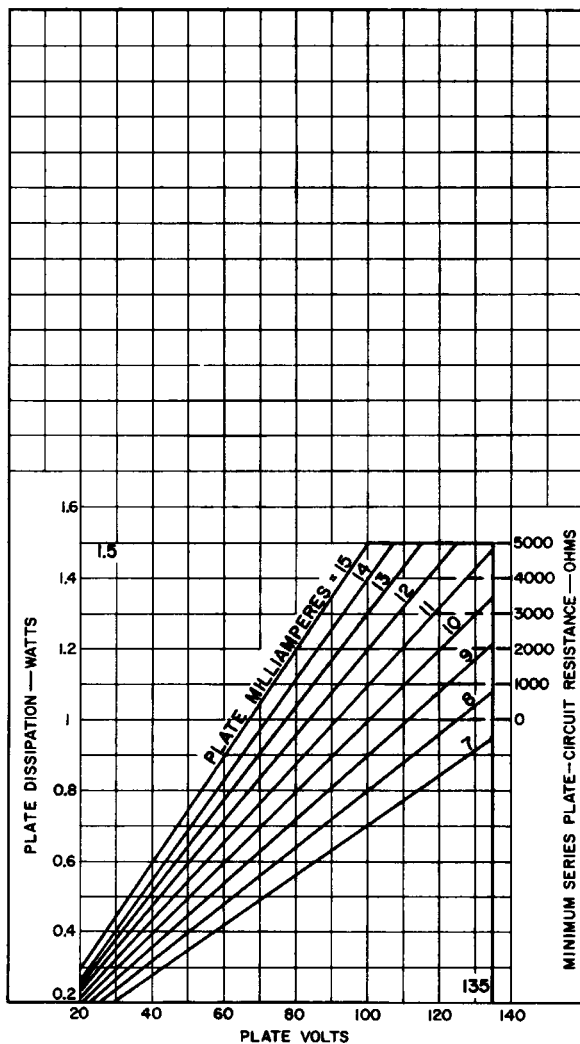

92CM-11681




## AVERAGE PLATE CHARACTERISTICS

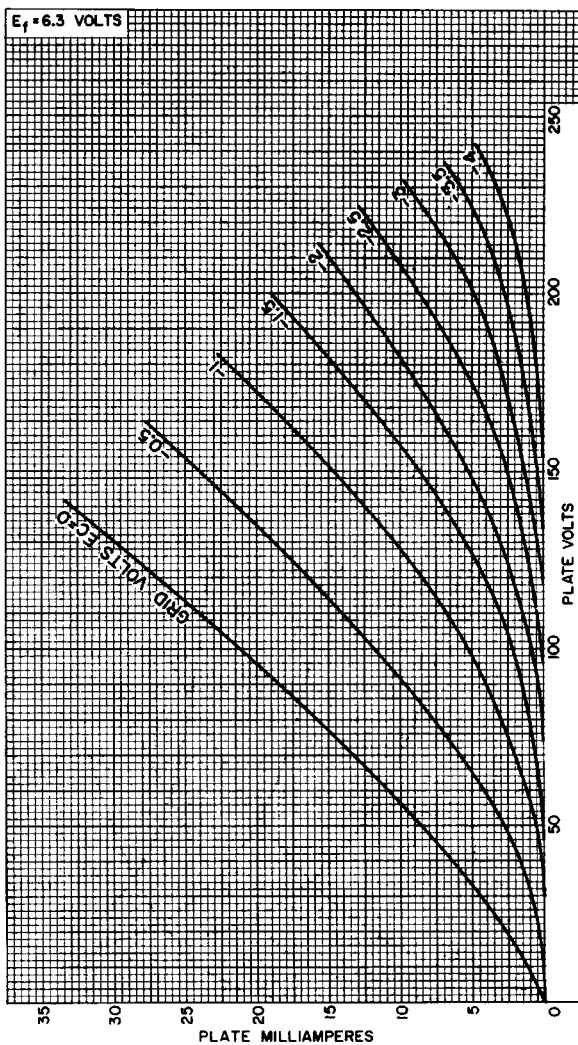

92CM-10524RI



## AVERAGE CHARACTERISTICS

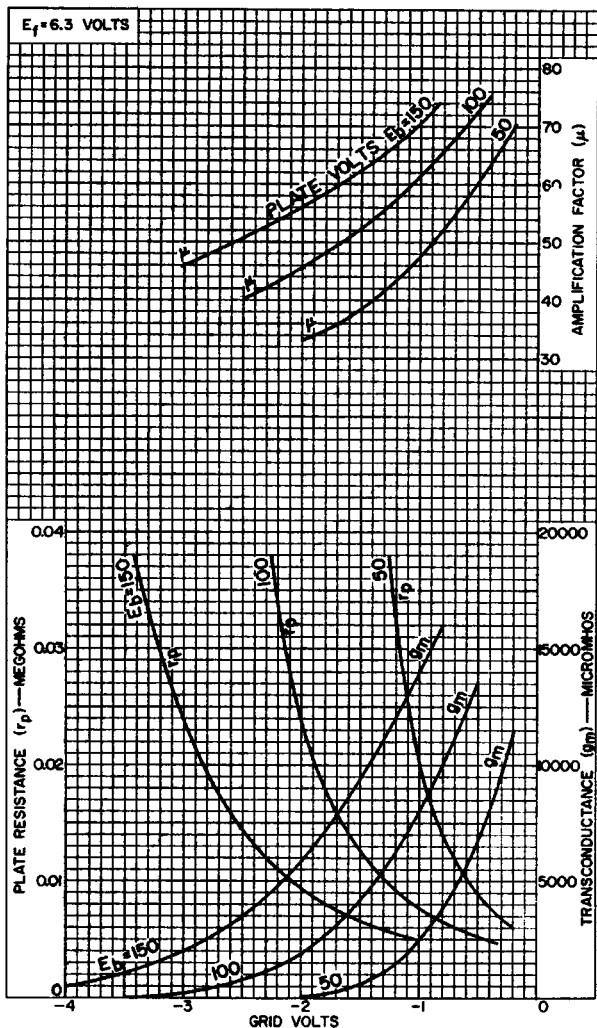

92CM-10520R1

