

Dual Triode With High-Mu Unit and Low-Mu Unit

GENERAL DATA

Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC)	6.3 ± 0.6	volts
Current at heater volts = 6.3.	1.05	amp
Peak heater-cathode voltage (Each unit):		
Heater negative with respect to cathode	200 max.	volts
Heater positive with respect to cathode	200 ^a max.	volts

Direct Interelectrode Capacitances (Approx.):^b

	Unit No. 1	Unit No. 2	
Grid to plate.	4.0	8.0	pf
Grid to cathode and heater	2.2	6.0	pf
Plate to cathode and heater.	0.6	1.3	pf


Characteristics, Class A₁ Amplifier:

	Unit No. 1		Unit No. 2		
Plate Voltage.	250	275	60	175	volts
Grid Voltage	-3	^c	0 ^d	-25	volts
Amplification Factor	66	-	-	5	
Plate Resistance (Approx.)	30000	-	-	780	ohms
Transconductance	2200	1600	-	6400	μmhos
Plate Current.	2	13	100	46	ma
Grid Voltage (Approx.) for plate μa =					
20	-5.3	-	-	-	volts
200	-	-	-	-60	volts

Mechanical:

Operating Position	Any
Type of Cathodes	Coated Unipotential
Maximum Overall Length	3"
Maximum Seated Length.	2-7/16"
Maximum Diameter	1-9/32"
Bulb	T9
Base	Intermediate-Shell Octal 8-Pin, (JEDEC Group 1, No. B8-6)
Basing Designation for BOTTOM VIEW	8BD

- Pin 1 - Grid of Unit No. 2
- Pin 2 - Plate of Unit No. 2
- Pin 3 - Cathode of Unit No. 2
- Pin 4 - Grid of Unit No. 1



- Pin 5 - Plate of Unit No. 1
- Pin 6 - Cathode of Unit No. 1
- Pin 7 - Heater
- Pin 8 - Heater



VERTICAL-DEFLECTION OSCILLATOR

Values are for Unit No. 1

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^e

DC PLATE VOLTAGE.	350 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE.	400 max.	volts
PLATE DISSIPATION	1 max.	watt

Maximum Circuit Values:

Grid-Circuit Resistance:

For fixed-bias operation.	1 max.	megohm
For cathode-bias operation.	2.2 max.	megohms

VERTICAL-DEFLECTION AMPLIFIER

Values are for Unit No. 2

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^e

DC PLATE VOLTAGE.	550 max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE ^f	1500 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE.	250 max.	volts
CATHODE CURRENT:		
Peak.	175 max.	ma
Average	50 max.	ma
PLATE DISSIPATION	10 ^g max.	watts

Maximum Circuit Values:

Grid-Circuit Resistance:

For fixed-bias operation.	1 max.	megohm
For cathode-bias operation.	2.2 max.	megohms

^a The dc component must not exceed 100 volts.

^b without external shield.

^c Adjusted for plate ma.=13.


^d Applied for short interval (two seconds maximum) so as not to damage tube.

^e As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

^f This rating is applicable when the duration of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

^g In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.



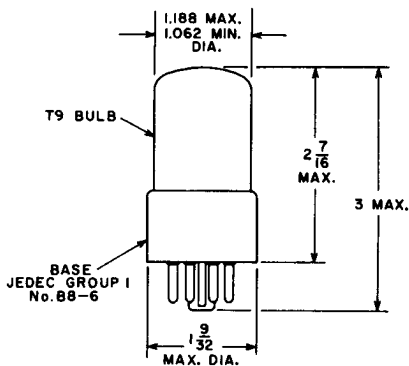

ALL DIMENSIONS IN INCHES

