

## Beam Power Tube

## Duodecar Type

For Color-TV Horizontal-Deflection Amplifier  
Circuits Using 240 V to over 400 V "B" Supplies

ELECTRICAL CHARACTERISTICS - *Bogey* Values

Heater Voltage, ac or dc . . .	$E_h$	6.3	V
Heater Current . . . . .	$I_h$	2.25	A
Direct Interelectrode			
Capacitances: <sup>a</sup>			
Grid No.1 to plate . . . . .	$c_{g1-p}$	0.44	pF
Input: G1 to (K,G3,G2,H) .	$c_i$	33	pF
Output: P to (K,G3,G2,H).	$c_o$	18	pF

For the following characteristics, see Conditions below:

## Amplification Factor

(Triode Connection) <sup>b</sup> . . .	$\mu$	-	-	-	4 <sup>c</sup>	
Plate Resistance (approx.)	$r_p$	-	-	-	6600	$\Omega$
Transconductance . . . . .	$g_m$	-	-	-	13400	$\mu\text{mho}$
DC Plate Current . . . . .	$I_b$	-	900 <sup>d</sup>	560 <sup>d</sup>	105	mA
DC Grid-No.2 Current. . . .	$I_{c2}$	-	110 <sup>d</sup>	46 <sup>d</sup>	2.0	mA

## Cutoff DC Grid-No.1 Volt-

age for $I_b = 1$ mA . . . . .	$E_{c1(co)}$	-125	-	-	-40	V
--------------------------------	--------------	------	---	---	-----	---

## Conditions:

Heater Voltage . . . . .	$E_h$	—————	6.3	—————		V
--------------------------	-------	-------	-----	-------	--	---

## Peak Positive-Pulse

Plate Voltage <sup>e</sup> . . . . .	$E_{bm}$	5000	-	-	-	V
DC Plate Voltage . . . . .	$E_b$	-	45	50	150	V
Grid No.3 . . . . .	Connected to cathode at socket					
DC Grid-No.2 Voltage . . .	$E_{c2}$	110	160	110	110	V
DC Grid-No.1 Voltage . . .	$E_{c1}$	-	0	-	-20	V

## MECHANICAL CHARACTERISTICS

Maximum Overall Length . . . . .	4.375 in (111.12 mm)
Maximum Seated Length . . . . .	4.000 in (101.6 mm)
Maximum Diameter . . . . .	1.563 in (39.7 mm)
Dimensional Outline . . . . .	JEDEC No.12-90
Envelope . . . . .	JEDEC T12
Top Cap <sup>f</sup> . . . . .	Small (JEDEC C1-1 or C1-34)



Electronic  
Components

DATA 1

5-69

# 6LB6

Base . . . . .	Large-Button Duodecar 12-Pin (JEDEC E12-74)		
Terminal Diagram . . . . .	JEDEC 12GJ		
Type of Cathode . . . . .	Coated Unipotential		
Operating Position . . . . .	Any		

## MAXIMUM RATINGS — Design-Maximum Values<sup>g</sup>

For operation as a Horizontal-Deflection-Amplifier Tube  
in a 525-line, 30-frame system

DC Plate Supply Voltage . . . . .	E <sub>bb</sub>	990	V
Peak Positive-Pulse Plate Voltage <sup>h</sup> . . .	e <sub>bm</sub>	7000 <sup>k</sup>	V
Peak Negative-Pulse Plate Voltage . . .	-e <sub>bm</sub>	100	V
DC Grid-No.3 Voltage . . . . .	E <sub>c3</sub>	0	V
DC Grid-No.2 (Screen-Grid) Voltage . . .	E <sub>c2</sub>	200	V
Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage . . . . .	-e <sub>c1m</sub>	300	V
Heater-Cathode Voltage:			
Peak . . . . .	e <sub>hkm</sub>	±200	V
Average <sup>m</sup> . . . . .	E <sub>hk</sub>	100	V
Heater Voltage, ac or dc . . . . .	E <sub>h</sub>	5.7 to 6.9	V
Cathode Current:			
Peak . . . . .	i <sub>km</sub>	1100	mA
Average <sup>m</sup> . . . . .	I <sub>k(av)</sub>	315	mA
Grid-No.2 Input . . . . .	P <sub>g2</sub>	5.0	W
Plate Dissipation <sup>n</sup> . . . . .	P <sub>b</sub>	30	W
Envelope Temperature . . . . .	T <sub>E</sub>	200 <sup>p</sup>	°C

## MAXIMUM CIRCUIT VALUES

Grid-No.1-Circuit Resistance . . . . .	R <sub>g1</sub>	1.2	MΩ
With Feedback-Type High			
Voltage Regulation			
Grid-No.1-Circuit Resistance . . . . .	R <sub>g1</sub>	10	MΩ
With Shunt-Type High			
Voltage Regulation			
Grid-No.3-Circuit Resistance . . . . .	R <sub>g3</sub>	0	Ω

<sup>a</sup> Measured without external shield in accordance with the current issue of EIA Standard RS-191.

<sup>b</sup> With grid No.3 and grid No.2 connected, respectively, to cathode and plate at socket.




Electronic  
Components

DATA 1

- c Conditions:  $E_b = E_{c2} = 125 \text{ V}$ ,  $E_{c1} = -25 \text{ V}$ .
- d This value can be measured by a method involving a recurrent waveform such that the Maximum Ratings of the tube will not be exceeded.
- e Under pulse-duration condition specified in Footnote h.
- f Designed to mate with connector of 0.250-inch cap, generally available from your local RCA distributor.
- g As defined in the current issue of EIA Standard RS-239, unless otherwise specified.
- h This rating is applicable when the duration of the voltage pulse does not exceed 15% of one horizontal scanning cycle. In a 525-line, 30-frame system, 15% of one horizontal scanning cycle is  $10 \mu\text{s}$ .
- k Absolute-Maximum Value.
- m Measured with a DC meter.
- n An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
- p This rating is applicable when measurement is made using a thermocouple attached to a 0.1-inch wide phosphor-bronze ring placed at the hottest location on the envelope. A maximum rating of  $220^\circ\text{C}$  is applicable to direct thermocouple measurements taken at the hottest point on the envelope surface.


#### TERMINAL DIAGRAM (Bottom View)

- Pin 1 – Heater
- Pin 2 – Cathode
- Pin 3 – Grid No.2
- Pin 4 – Grid No.3
- Pin 5 – Grid No.1
- Pin 6 – No Internal Connection
- Pin 7 – Do Not Use
- Pin 8 – No Internal Connection
- Pin 9 – Do Not Use
- Pin 10 – Grid No.3
- Pin 11 – Do Not Use
- Pin 12 – Heater
- Cap – Plate

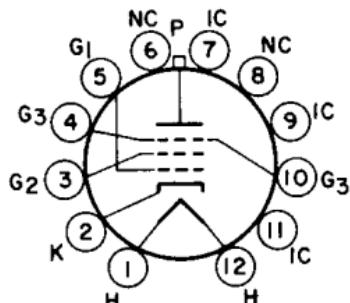

JEDEC 12GJ

## DIMENSIONAL OUTLINE (JEDEC No.12-90)

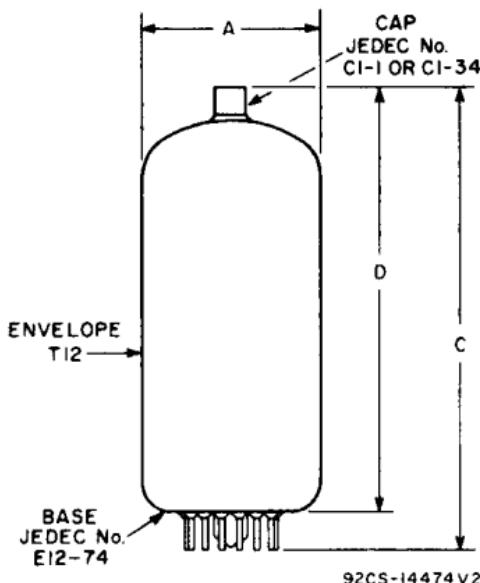

DIMENSION	INCHES		MILLIMETERS	
	Min.	Max.	Min.	Max.
A	1.437*	1.563	36.5*	39.7
C	-	4.375	-	111.12
D	3.750	4.000	95.3	101.6
<b>MILLIMETER DIMENSION DERIVED FROM INCH DIMENSION</b>				
* Applies to the minimum diameter except in the area of the seal.				