


## TUNG-SOL

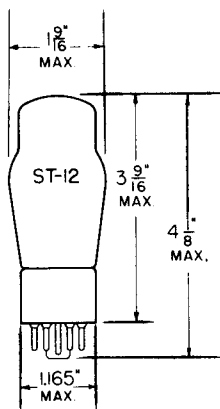


## ARGON FILLED THYRATRON

COATED FILAMENT

2.5 VOLTS 2.5 AMPERE

DC

GLASS BULB

SMALL  
7-PIN OCTAL BASE

THE 2A4G IS A HOT CATHODE, ARGON FILLED, SINGLE GRID, THYRATRON TUBE PARTICULARLY USEFUL IN APPLICATIONS WHERE CONSTANCY OF CHARACTERISTICS IS NECESSARY EVEN WITH LARGE VARIATIONS IN AMBIENT TEMPERATURE.

## RATINGS

MAXIMUM ANODE VOLTAGE: (INSTANTANEOUS)		
FORWARD	200	VOLTS
INVERSE	200	VOLTS
MAXIMUM VOLTAGE BETWEEN ANY TWO ELECTRODES	250	VOLTS
MAXIMUM ANODE CURRENT:		
PEAK	1.25	AMPERES
AVERAGE	0.10	AMPERE
MAXIMUM AVERAGING TIME	45	SECONDS
TUBE VOLTAGE DROP	15	VOLTS
COLD STARTING TIME	2.0	SECONDS