

# SUBMINIATURE U.H.F. TRIODE

# DC70

Triode primarily intended for use as an oscillator in battery-operated equipment at frequencies of the order of 500Mc/s.

This valve is primarily intended for use in communications equipment of the 'push to talk' type and its continuous life rating under typical supply voltage conditions is relatively short and is chiefly a function of hours of filament operation and filament temperature.

Under 'push to talk' conditions an operating life of about 200 hours may be expected.

## FILAMENT

Suitable for d.c. operation only.

$V_f$	1.25	V
$I_f$	200	mA

## MOUNTING POSITION

Any

**Note** – Direct soldered connections to the leads of this valve must be at least 5mm from the seal and any bending of the valve leads must be at least 1.5mm from the seal.

If the valve is used with an earthed metal clip a decrease in output power of approximately 10% can be expected up to 200Mc/s.

## CAPACITANCES

	Shielded	Unshielded
$C_{g1-g2}$	1.5	1.5 pF
$C_{g1-f}$	1.3	1.25 pF
$C_{g2-f}$	1.9	1.0 pF

## CHARACTERISTICS

$V_{a1}$	150	V
$I_{a1}$	14.5	mA
$V_{k1}$	-4.5	V
$g_m$	3.75	mA/V
$r_{ik}$	4.0	k $\Omega$
$\mu$	15	

## OPERATING CONDITIONS AS CLASS 'C' TELEGRAPHY R.F. OSCILLATOR

	10	50	200	400	500	Mc/s
$V_a$	150	150	150	150	150	V
$I_a$	17.1	17.1	17.3	18.5	18.7	mA
$I_g$	2.9	2.9	2.7	1.5	1.3	mA
$R_g$	5.6	4.7	3.9	6.8	6.8	k $\Omega$
$P_{load}$	1.4	1.4	1.0	0.8	0.55	W
$\eta_{load}$	55	55	39	29	20	%
$V_{a(pk)}$	120					V
$V_{g(pk)}$	32					V



*Triode primarily intended for use as an oscillator in battery-operated equipment at frequencies of the order of 500Mc/s*

### OPERATING CONDITIONS AS CLASS 'C' TELEGRAPHY R.F. AMPLIFIER

$f$	50	200	Mc/s
$V_a$	150	150	V
$V_g$	-18	-18	V
$I_a$	16.4	16.8	mA
$I_g$	3.6	3.2	mA
$P_{load}$	1.5	1.2	W
$\eta_{load}$	61	48	%

$P_{drive}$  measured at the grid is approximately 200mW at  $f=200Mc/s$  and does not include the power lost in the grid tuned circuit.

### OPERATING CONDITIONS AS FREQUENCY MULTIPLIER

#### Single valve doubler

$f_{out}$		50	Mc/s
$V_a$		150	V
$V_g$		-45	V
$I_a$		17.3	mA
$I_g$		2.7	mA
$P_{load}$		1.0	W
$\eta_{load}$		39	%

#### Two valve push-push doubler

$f_{out}$	200	470	500	Mc/s
$V_a$	150	150	150	V
$V_g$	-45	-40	-40	V
$I_a$	$2 \times 18$	$2 \times 11.8$	$2 \times 11.9$	mA
$I_g$	$2 \times 2.0$	$2 \times 0.7$	$2 \times 0.6$	mA
$P_{load}$	1.6	0.38	0.34	W
$\eta_{load}$	30	11	10	%

#### Single valve trebler

$f_{out}$	50	470	500	Mc/s
$V_a$	150	150	150	V
$V_g$	-80	-80	-80	V
$I_a$	18.1	14.3	14.4	mA
$I_g$	1.9	0.7	0.6	mA
$P_{load}$	650	220	190	mW
$\eta_{load}$	24	10	9.0	%



# SUBMINIATURE U.H.F. TRIODE

# DC70


Triode primarily intended for use as an oscillator in battery-operated equipment at frequencies of the order of 500Mc/s.

## LIMITING VALUES

$V_a$ max.	150	V
$p_a$ max.	2.4	W
$I_g$ max.	5.0	mA
$R_{g-f}$ max.	500	k $\Omega$
$V_f$ max. (absolute)	1.35	V
$V_g$ max. :- r.f. amplifier	-30	V
frequency doubler	-45	V
push-push doubler ( $f < 400$ Mc/s)	-45	V
push-push doubler ( $f > 400$ Mc/s)	-40	V
frequency trebler	-80	V
$I_k$ max. :-	20	mA
push-push doubler ( $f < 400$ Mc/s)	$2 \times 20$	mA
push-push doubler ( $f > 400$ Mc/s)	$2 \times 12.5$	mA
frequency trebler ( $f > 400$ Mc/s)	15	mA

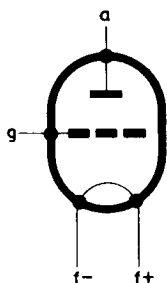

B8D/F Base

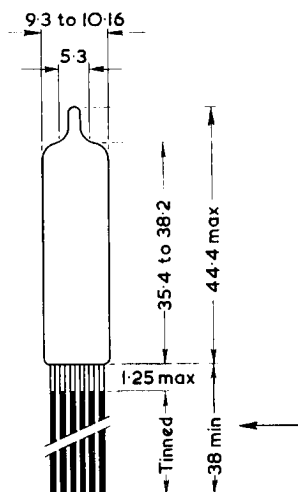


3228

All dimensions in mm

# DC70

## SUBMINIATURE U.H.F. TRIODE

Triode primarily intended for use as an oscillator in battery-operated equipment at frequencies of the order of 500Mc/s.

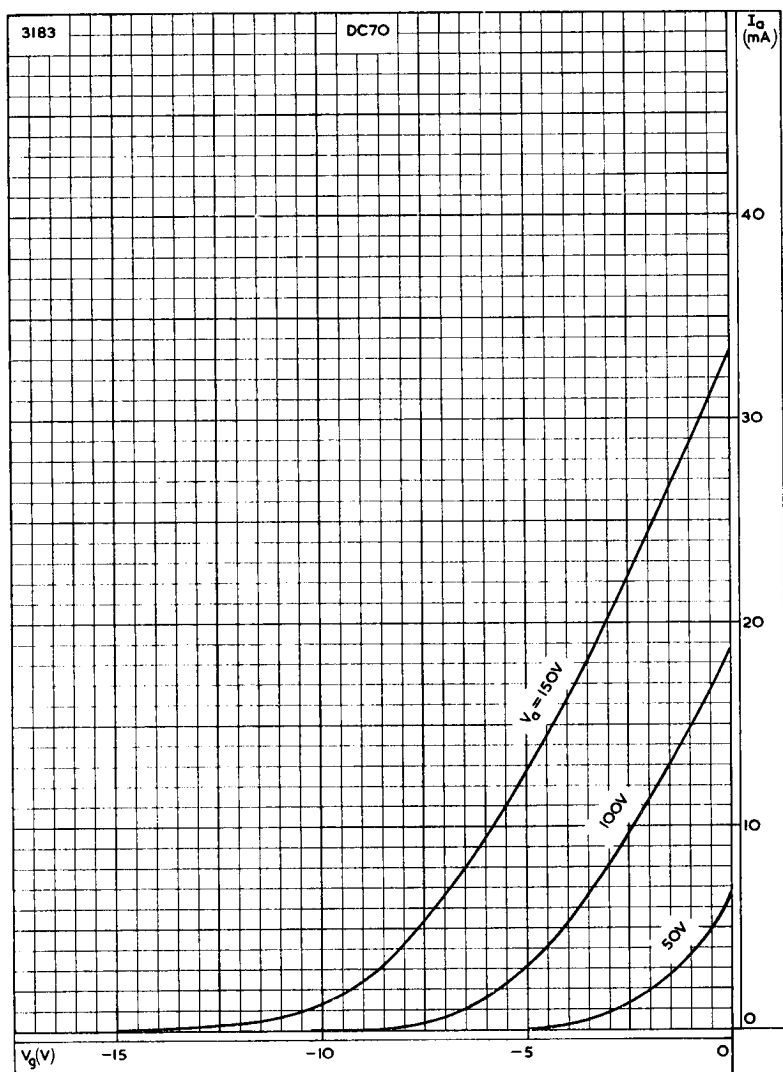


ANODE CURRENT PLOTTED AGAINST GRID VOLTAGE

# SUBMINIATURE U.H.F. TRIODE

# DC70

Triode primarily intended for use as an oscillator in battery-operated equipment at frequencies of the order of 500Mc/s.

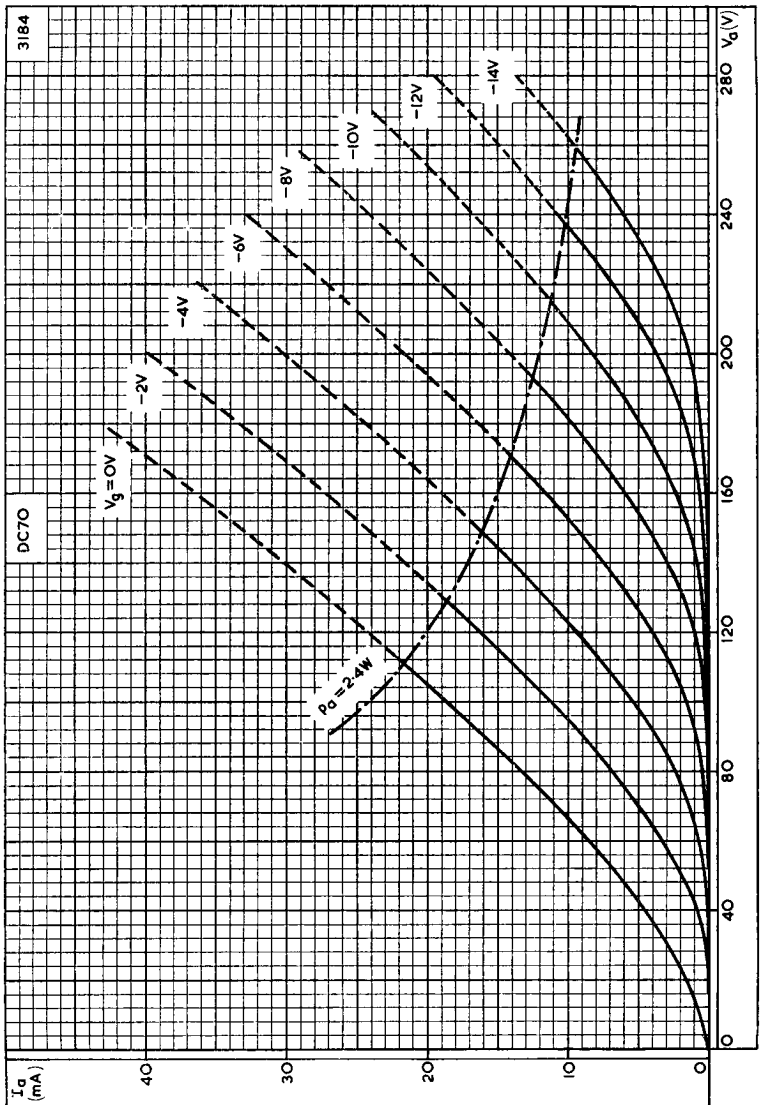


ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE

# DC70

## SUBMINIATURE U.H.F. TRIODE

Triode primarily intended for use as an oscillator in battery-operated equipment at frequencies of the order of 500Mc/s.

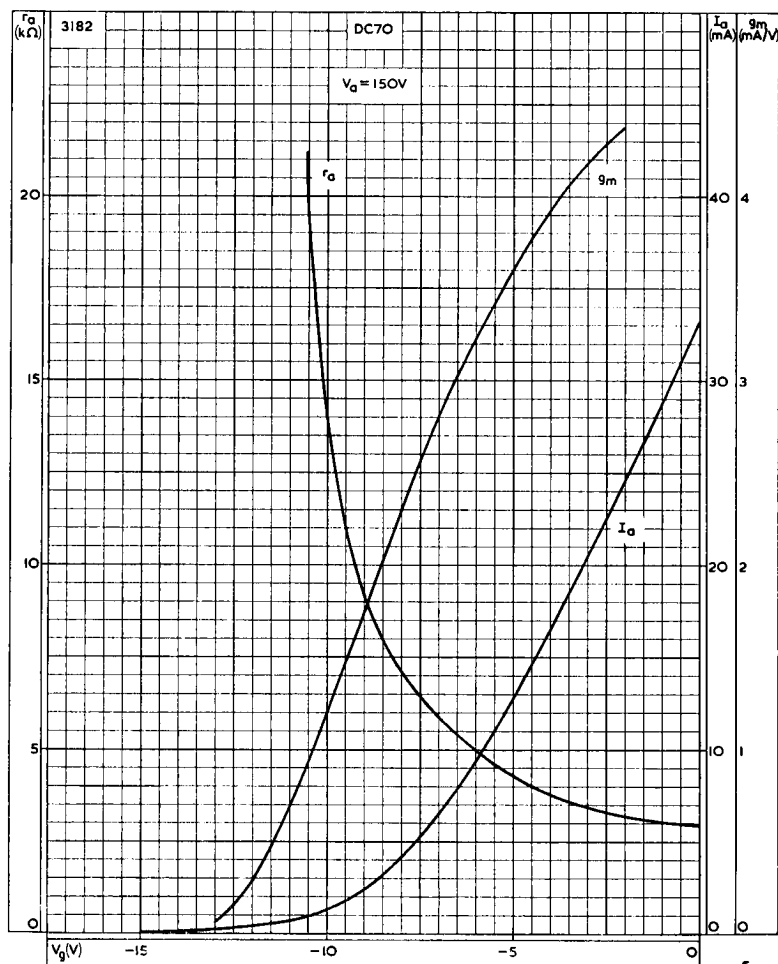

ANODE CURRENT, ANODE IMPEDANCE AND MUTUAL CONDUCTANCE  
PLOTTED AGAINST GRID VOLTAGE

