

### MECHANICAL DATA

Bulb . . . . .	T-12
Base <sup>1</sup> . . . . .	Low Loss Phenolic 5-Pin
Basing . . . . .	5AW
Cathode . . . . .	Unipotential
Mounting Position . . . . .	Any

### RATINGS

Shock (Intermittent Service-Abs. Max.) . . . . .	450 g
Vibration (Continuous Service-Design Center) . . . . .	2.5 g
Mechanical Resonance . . . . .	None Below 100 cps

### ELECTRICAL DATA

#### HEATER CHARACTERISTICS

Heater Voltage . . . . .	6.3 Volts
Heater Current (Avg.) . . . . .	900 Ma
Heater Current (Max.) <sup>2</sup> . . . . .	990 Ma
Heater Current (Min.) <sup>2</sup> . . . . .	810 Ma

#### DIRECT INTERELECTRODE CAPACITANCES

	Min. <sup>2</sup>	Avg.	Max. <sup>2</sup>
Control Grid to Plate (Shielded) . . . . .			0.2 $\mu\mu\text{f}$
Input (Unshielded) . . . . .	10	12	14 $\mu\mu\text{f}$
Output (Unshielded) . . . . .	5.3	7	8.7 $\mu\mu\text{f}$

#### RATINGS (Design Center Values)



Plate Voltage (Class B, RF or AF) . . . . .	600 Volts Max.
Plate Voltage (Class C, CW) . . . . .	600 Volts Max.
Plate Voltage (Class C, Phone <sup>3</sup> ) . . . . .	475 Volts Max.
Screen Voltage . . . . .	300 Volts Max.
Control Grid Voltage (Class C) . . . . .	-200 Volts Max.
Plate Dissipation (Class B, RF or AF) . . . . .	25 Watts Max.
Plate Dissipation (Class C, CW) . . . . .	25 Watts Max.
Plate Dissipation (Class C, Phone <sup>3</sup> ) . . . . .	16.5 Watts Max.
Screen Dissipation (Class B, AF) . . . . .	3.5 Watts Max.
Screen Dissipation (Class B, RF) . . . . .	2.5 Watts Max.
Screen Dissipation (Class C, CW) . . . . .	3.5 Watts Max.
Screen Dissipation (Class C, Phone <sup>3</sup> ) . . . . .	2.5 Watts Max.
Plate Input (Class B, AF) . . . . .	60 Watts Max.
Plate Input (Class B, RF) . . . . .	37.5 Watts Max.
Plate Input (Class C, CW) . . . . .	60 Watts Max.
Plate Input (Class C, Phone <sup>3</sup> ) . . . . .	40 Watts Max.
Heater-Cathode Voltage . . . . .	135 Volts Max.
Frequency for 100% Rating . . . . .	60 Mc Max.
Frequency for 75% Rating (Class B, Class C Grid or Suppressor Modulated) . . . . .	125 Mc Max.
Frequency for 55% Rating (Class C, or Plate Modulated) . . . . .	125 Mc Max.

#### CHARACTERISTICS

	Min. <sup>2</sup>	Avg.	Max. <sup>2</sup>
Plate Voltage . . . . .	—	600	— Volts
Screen Voltage . . . . .	—	300	— Volts
Control Grid Voltage . . . . .	—	-29	— Volts
Plate Current . . . . .	24	36	48 Ma
Screen Current . . . . .	—	—	4 Ma
Plate Current for E <sub>c</sub> = -100 Volts . . . . .	—	—	0.5 Ma
Power Output at 15 mc with Screen Volts = 200, I <sub>b</sub> = 100 ma, I <sub>c</sub> = 5 to 7 ma, R <sub>L</sub> = 10,000 Ohms . . . . .	33	—	— Watts

### QUICK REFERENCE DATA

Rugged beam amplifier tube designed for use in mobile transmitters or amplifiers which may be subjected to shock or vibration.

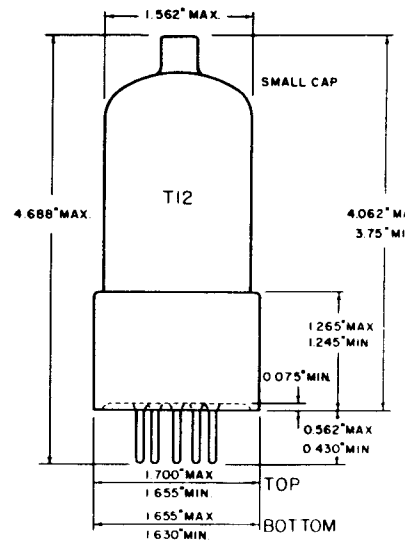

**SYLVANIA ELECTRIC PRODUCTS INC.**

*Prepared and Released By The  
TECHNICAL PUBLICATIONS SECTION  
EMPORIUM, PENNSYLVANIA*

SEPTEMBER 1952

**TYPICAL OPERATION**

**Audio Amplifier or Modulator (Class AB<sub>2</sub>) — Two Tubes**

	CCS <sup>4</sup>			ICAS <sup>5</sup>
Plate Voltage . . . . .	400	500	600	750 Volts
Screen Grid Voltage <sup>6</sup> . . . . .	300	300	300	300 Volts
Control Grid Voltage . . . . .	-25	-29	-30	-32 Volts
Peak Grid to Grid Signal Voltage . . . . .	78	86	78	92 Volts
Plate Current (Zero Signal) . . . . .	90	72	60	52 Ma
Plate Current (Maximum Signal) . . . . .	240	240	200	240 Ma
Screen Current (Zero Signal) . . . . .	5	5	5	5 Ma
Screen Current (Maximum Signal) . . . . .	10	10	10	10 Ma
Load Resistance (Plate to Plate) . . . . .	3200	4240	6400	6950 Ohms
Driving Power (Maximum Signal) (approx.) <sup>7</sup> . . . . .	0.2	0.2	0.1	0.2 Watt
Power Output (approx.) <sup>8</sup> . . . . .	55	75	80	120 Watts

**RF Power Amplifier (Class B Telephony)  
Single Tube — 100% Modulation of Driver Stage**

Plate Voltage . . . . .	400	500	600	750 Volts
Screen Grid Voltage . . . . .	250	250	250	300 Volts
Control Grid Voltage <sup>9</sup> . . . . .	-25	-25	-25	-35 Volts
Peak Signal Voltage . . . . .	30	30	20	27 Volts
Plate Current . . . . .	75	75	62.5	60 Ma
Screen Current . . . . .	4	4	3	3 Ma
Control Grid Current (approx.) . . . . .	0	0	0	0 Ma
Driving Power (approx.) . . . . .	0.25	0.25	0.2	0.12 Watt
Power Output (approx.) . . . . .	9	12.5	12.5	15 Watts

**RF Power Amplifier (Class C Telephony)  
Single Tube — 100% Plate Modulation**

Plate Voltage . . . . .	325	400	475	600 Volts
Screen Grid Voltage <sup>10</sup> . . . . .	225	225	225	275 Volts
Screen Dropping Resistor . . . . .	20000	30000	50000	50000 Ohms
Control Grid Voltage <sup>11</sup> . . . . .	-75	-80	-85	-90 Volts
Grid Leak Resistor . . . . .	25000	22800	21300	22500 Ohms
Peak Signal Voltage . . . . .	90	95	110	115 Volts
Plate Current . . . . .	80	80	83	100 Ma
Screen Current . . . . .	5	5.75	5	6.5 Ma
Grid Current (approx.) . . . . .	3	3.5	4	4 Ma
Driving Power (approx.) . . . . .	0.25	0.3	0.4	0.4 Watt
Power Output (approx.) . . . . .	17.5	22.5	27.5	42.5 Watts

**RF Power Amplifier or Oscillator (Class C Telegraphy)  
Single Tube Key Down Unmodulated Condition**

Plate Voltage . . . . .	400	500	600	750 Volts
Screen Grid Voltage <sup>12</sup> . . . . .	250	250	250	250 Volts
Screen Dropping Resistor . . . . .	20000	42000	50000	85000 Ohms
Control Grid Voltage <sup>13</sup> . . . . .	-45	-45	-45	-45 Volts
Peak Signal Voltage . . . . .	65	65	65	65 Volts
Plate Current . . . . .	100	100	100	100 Ma
Screen Current . . . . .	7.5	6.0	7.0	6.0 Ma
Grid Current (approx.) . . . . .	3.5	3.5	3.5	3.5 Ma
Driving Power (approx.) . . . . .	0.2	0.2	0.2	0.2 Watt
Power Output (approx.) . . . . .	25	30	40	50 Watts


**NOTES:**

1. Base dielectric loss factor is 0.1 maximum. Reference: ASTM Designation D-150-47T.
2. Extreme values which may be expected in production.
3. With plate modulation.
4. Continuous commercial service.
5. Intermittent commercial and amateur service.
6. May be obtained from a separate, well-regulated source or from the plate supply voltage if a voltage divider is used.
7. The effective grid circuit resistance should not exceed 500 ohms per grid, or the impedance 700 ohms.
8. Distortion in practical circuits should not exceed 5%, 5% and 3%, respectively, under CCS conditions.
9. The total effective grid circuit resistance should not exceed 25,000 ohms. May be obtained by either fixed bias or bypassed cathode resistor.
10. Generally obtained from the modulated plate supply through the specified resistor but a separate source properly modulated may be used.
11. Bias may be provided by any method. When grid leak bias is used the grid circuit resistance should not exceed the specified value.
12. May be obtained from the plate voltage supply through the specified dropping resistor or a separate supply may be provided.
13. Bias may be provided by use of 12,800 ohm grid leak, 410 ohm cathode resistor, fixed separate source, or combination of these. The grid circuit resistance should not exceed 25,000 ohms.

**CIRCUIT APPLICATION**

This type was primarily designed to make available the good characteristics of the Type 807 in a mechanical structure that could stand up under rough service. If it is desired to use this type for replacement in existing equipment, the effect of the different base diameter and bulb size (shown on the outline drawing) will require consideration.

AVERAGE PLATE CHARACTERISTICS

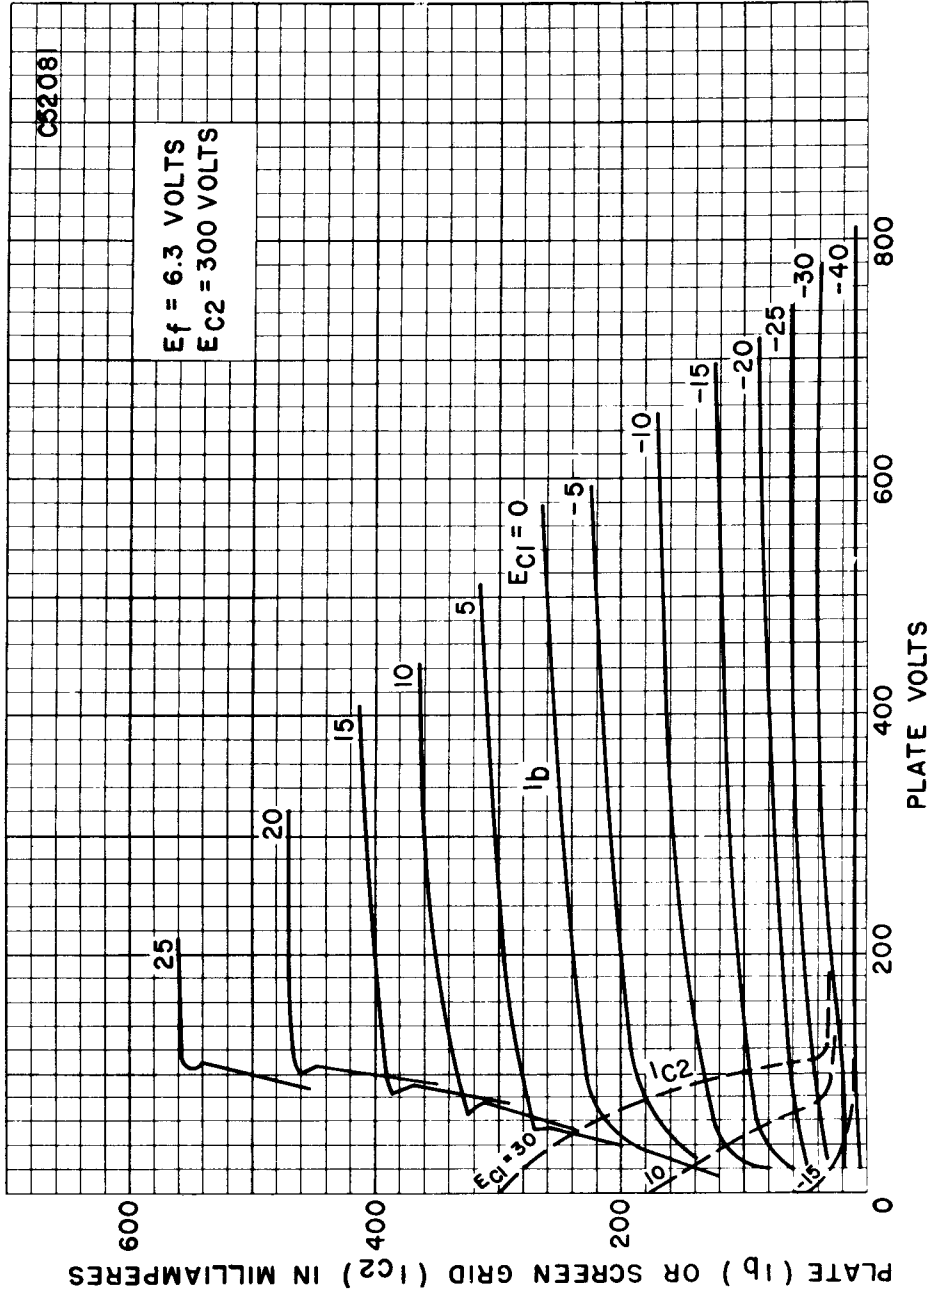

AVERAGE PLATE CHARACTERISTICS

SYLVANIA

5933

807W

