



TECHNICAL DATA

5D22  
4-250A

RADIAL BEAM  
POWER TETRODI

The EIMAC 5D22/4-250A is a compact, ruggedly constructed power tetrode having a maximum plate dissipation rating of 250 watts. It is intended for use as an amplifier, oscillator or modulator. The low grid-plate capacitance of this tetrode coupled with its low driving-power requirement allows considerable simplification of the associated circuit and driver stage.

The 5D22/4-250A is cooled by radiation from the plate and by circulation of forced-air through the base, around the envelope, and over the plate seal.



GENERAL CHARACTERISTICS<sup>1</sup>

ELECTRICAL

Filament: Thoriated Tungsten

Voltage . . . . .	5.0 ± 0.25 V
Current, at 5.0 volts . . . . .	14.5 A

Transconductance (Average):

$I_b = 100 \text{ mA}, E_{c2} = 500 \text{ Vdc}$ . . . . .	4000 $\mu\text{mhos}$
--	-----------------------

Amplification Factor (Average):

Grid to Screen . . . . .	5.1
--------------------------	-----

Direct Interelectrode Capacitance ( grounded filament)<sup>2</sup>

Input . . . . .	12.7 pF
Output . . . . .	4.5 pF
Feedback . . . . .	0.12 pF

Frequency of Maximum Rating:

CW . . . . .	110 MHz
--------------	---------

1. Characteristics and operating values are based upon performance tests. These figures may change without notice as the result of additional data or product refinement. EIMAC Division of Varian should be consulted before using this information for final equipment design.
2. Capacitance values are for a cold tube as measured in a special shielded fixture.

MECHANICAL

Maximum Overall Dimensions:

Length . . . . .	6.375 in; 161.93 mm
Diameter . . . . .	3.563 in; 90.50 mm
Net Weight . . . . .	8 oz; 226.8 gm

Operating Position . . . . . Vertical, base down or up

Maximum Operating Temperature:

Plate Seal . . . . .	200°C
Base Seals . . . . .	170°C



Cooling . . . . . Radiation and forced air  
 Base . . . . . Special 5-pin  
 Recommended Air System Socket . . . . . EIMAC SK-400 Series  
 Recommended Chimney . . . . . EIMAC SK-406  
 Recommended Heat-Dissipating Connector:  
 Plate . . . . . HR-6

**RADIO FREQUENCY LINEAR AMPLIFIER  
 GRID DRIVEN**

Class AB<sub>1</sub>

ABSOLUTE MAXIMUM RATINGS

DC PLATE VOLTAGE . . . . .	4000	VOLTS
DC SCREEN VOLTAGE . . . . .	600	VOLTS
DC PLATE CURRENT . . . . .	0.35	AMPERE
PLATE DISSIPATION . . . . .	250	WATTS
SCREEN DISSIPATION . . . . .	35	WATTS
GRID DISSIPATION . . . . .	10	WATTS

TYPICAL OPERATION (Frequencies to 30 MHz)

Class AB<sub>1</sub>, Grid Driven, Peak Envelope or Modulation  
 Crest Conditions

Plate Voltage . . . . .	2500	3000	Vdc
Screen Voltage . . . . .	600	600	Vdc
Grid Voltage <sup>1</sup> . . . . .	-110	-116	Vdc
Zero-Signal Plate Current . . . . .	60	60	mAdc
Single-Tone Plate Current . . . . .	215	205	mAdc
Zero-Signal Screen Current <sup>2</sup> . . . . .	-0.10	-0.10	mAdc
Single-Tone Screen Current <sup>2</sup> . . . . .	7	6	mAdc
Peak rf Grid Voltage <sup>2</sup> . . . . .	90	93	v
Plate Dissipation . . . . .	225	250	W
Single-Tone Plate Output Power . . . . .	312	350	W
Resonant Load Impedance . . . . .	5800	7300	Ω

1. Adjust to specified zero-signal dc plate current.
2. Approximate value.

**RADIO FREQUENCY POWER AMPLIFIER OR  
 OSCILLATOR** Class C Telegraphy or FM Telephony  
 (Key-Down Conditions)

ABSOLUTE MAXIMUM RATINGS

DC PLATE VOLTAGE . . . . .	4000	VOLTS
DC SCREEN VOLTAGE . . . . .	600	VOLTS
DC GRID VOLTAGE . . . . .	-500	VOLTS
DC PLATE CURRENT . . . . .	0.35	AMPERE
PLATE DISSIPATION . . . . .	250	WATTS
SCREEN DISSIPATION . . . . .	35	WATTS
GRID DISSIPATION . . . . .	10	WATTS

TYPICAL OPERATION (Frequencies to 110 MHz)

Plate Voltage . . . . .	2500	3000	4000	Vdc
Screen Voltage . . . . .	500	500	500	Vdc
Grid Voltage . . . . .	-150	-180	-225	Vdc
Plate Current . . . . .	300	345	312	mAdc
Screen Current <sup>2</sup> . . . . .	60	60	45	mAdc
Grid Current <sup>2</sup> . . . . .	9	10	9	mAdc
Peak rf Grid Voltage <sup>2</sup> . . . . .	220	265	303	v
Calculated Driving Power <sup>2/3</sup> . . . . .	1.7	2.6	2.5	W
Plate Input Power . . . . .	750	1035	1250	W
Plate Dissipation . . . . .	175	235	250	W
Plate Output Power . . . . .	575	800	1000	W

1. Above 110 MHz, the maximum plate voltage rating depends upon frequency. See Application (Electrical) section.
2. Approximate value.
3. Driving power increases above 40 MHz. See Application (Electrical) section.

**PLATE MODULATED RADIO FREQUENCY POWER  
 AMPLIFIER-GRID DRIVEN** Class C Telephony

(Carrier Conditions)

ABSOLUTE MAXIMUM RATINGS

DC PLATE VOLTAGE <sup>1</sup> . . . . .	3200	VOLTS
DC SCREEN VOLTAGE . . . . .	600	VOLTS
DC GRID VOLTAGE . . . . .	-500	VOLTS
DC PLATE CURRENT . . . . .	0.275	AMPERE
PLATE DISSIPATION <sup>2</sup> . . . . .	165	WATTS
SCREEN DISSIPATION <sup>3</sup> . . . . .	35	WATTS
GRID DISSIPATION <sup>3</sup> . . . . .	10	WATTS

TYPICAL OPERATION (Frequencies to 110 MHz)

Plate Voltage . . . . .	2500	3000	Vdc
Screen Voltage . . . . .	400	400	Vdc
Grid Voltage . . . . .	-200	-310	Vdc
Plate Current . . . . .	200	225	mAdc
Screen Current <sup>4</sup> . . . . .	30	30	mAdc
Grid Current <sup>4</sup> . . . . .	9	9	mAdc
Peak af Screen Voltage (100% modulation) <sup>4</sup> . . . . .	350	350	v
Peak rf Grid Voltage <sup>4</sup> . . . . .	255	365	v
Calculated Driving Power <sup>4/5</sup> . . . . .	2.2	3.2	W
Plate Input Power . . . . .	500	675	W
Plate Dissipation . . . . .	125	165	W
Plate Output Power . . . . .	375	510	W

1. Above 110 MHz, the maximum plate voltage rating depends upon frequency. See Application(Electrical)section.
2. Corresponds to 250 watts at 100% sine-wave modulation.
3. Average, with or without modulation.

4. Approximate Value.
5. Driving power increases above 110 MHz. See Application (Electrical) section.



**AUDIO FREQUENCY POWER AMPLIFIER OR MODULATOR** Class AB, Grid Driven

(Sinusoidal Wave)

ABSOLUTE MAXIMUM RATINGS (per tube)

DC PLATE VOLTAGE . . . . . 4000 VOLTS

DC SCREEN VOLTAGE . . . . .	600 VOLTS
DC PLATE CURRENT . . . . .	0.35 AMPERE
PLATE DISSIPATION . . . . .	250 WATTS
SCREEN DISSIPATION . . . . .	35 WATTS
GRID DISSIPATION . . . . .	10 WATTS

TYPICAL OPERATION (Two Tubes), Class AB<sub>1</sub>

Plate Voltage . . . . .	1500	2000	2500	3000	Vdc
Screen Voltage . . . . .	600	600	600	600	Vdc
Grid Voltage <sup>1/3</sup> . . . . .	-95	-104	-110	-116	Vdc
Zero-Signal Plate Current	120	110	120	120	mAdc
Max. Signal Plate Current	400	405	430	417	mAdc
Zero-Signal Screen Current <sup>1</sup> . . . . .	-0.40	-0.30	-0.30	-0.20	mAdc
Max. Signal Screen Current <sup>1</sup> . . . . .	23	22	13	11	mAdc
Peak af Grid Voltage <sup>2</sup> . . . . .	64	88	90	93	v
Peak Driving Power . . . . .	0	0	0	0	w
Max. Signal Plate Dissipation <sup>2</sup> . . . . .	145	175	225	250	W
Plate Output Power . . . . .	310	460	625	750	W
Load Resistance (plate to plate) . . . . .	6250	9170	11,400	15,000	Ω

TYPICAL OPERATION (Two Tubes), Class AB<sub>2</sub>

Plate Voltage . . . . .	1500	2000	2500	3000	Vdc
Screen Voltage . . . . .	300	300	300	300	Vdc
Grid Voltage <sup>1/3</sup> . . . . .	-48	-48	-51	-53	Vdc
Zero-Signal Plate Current	100	120	120	125	mAdc
Max. Signal Plate Current	485	510	500	473	mAdc
Zero-Signal Screen Current <sup>1</sup> . . . . .	0	0	0	0	mAdc
Max. Signal Screen Current <sup>1</sup> . . . . .	34	26	23	33	mAdc
Peak af Grid Voltage <sup>2</sup> . . . . .	96	99	100	99	v
Peak Driving Power <sup>4</sup> . . . . .	4.7	5.5	4.8	4.6	w
Max. Signal Plate Dissipation <sup>2</sup> . . . . .	150	185	205	190	W
Plate Output Power . . . . .	428	650	840	1040	W
Load Resistance (plate to plate) . . . . .	5400	8000	10,900	16,000	Ω

1. Approximate value.
2. Per tube.
3. Adjust to give stated zero-signal plate current.
4. Nominal drive power is one-half peak drive power.

NOTE: TYPICAL OPERATION data are obtained from direct measurement or by calculation from published characteristic curves. Adjustment of the rf grid voltage to obtain the specified plate current at the specified bias, screen and plate voltages is assumed. If this procedure is followed, there will be little variation in output power when the tube is changed, even though there may be some variation in grid and screen current. The grid and screen currents which result when the desired plate current is obtained are incidental and vary from tube to tube. These current variations cause no difficulty so long as the circuit maintains the correct voltage in the presence of the variations in current. In the case of Class C Service, if grid bias is obtained principally by means of a grid resistor, the resistor must be adjustable to obtain the required bias voltage when the correct rf grid voltage is applied.

**RANGE VALUES FOR EQUIPMENT DESIGN**

	<u>Min.</u>	<u>Max.</u>	
Filament: Current at 5.0 volts . . . . .	13.5	14.7	A
Interelectrode Capacitances <sup>1</sup> (grounded filament connection)			
Input . . . . .	10.7	14.5	pF
Output . . . . .	3.7	5.1	pF
Feedback . . . . .	---	0.14	pF

1. In Shielded Fixture.



## APPLICATION

### MECHANICAL

**MOUNTING** - The 4-250A must be mounted vertically, base up or down. The socket must be constructed so as to allow an unimpeded flow of air through the holes in the base of the tube and must also provide clearance for the glass tip-off which extends from the center of the base. The metal tube-base shell should be grounded by means of suitable spring fingers. The above requirements are met by the EIMAC SK-400 and SK-410 Air-System Sockets. A flexible connecting strap should be provided between the EIMAC HR-6 connector on the plate terminal and the external plate circuit. The tube must be protected from severe vibration and shock.

**COOLING** - Adequate forced-air cooling must be provided to maintain the base seals at a temperature below 170°C, and the plate seal at a temperature below 200°C.

When the EIMAC SK-400 or SK-410 Air-System Socket is used, a minimum air flow of 5 cubic feet per minute at a static pressure of 0.25 inches of water or less, as measured in the socket or plenum chamber at sea level, is required to provide adequate cooling under all conditions of operation. Seal temperature limitations may require that cooling air be supplied to the tube even when the filament alone is on during stand-by periods.

In the event an Air-System Socket is not used, provision must be made to supply equivalent cooling of the base, the envelope, and the plate lead.

Intermittent-service applications where the "on" time does not exceed a total of five minutes in any ten-minute period, plate-seal temperatures as high as 220°C, are permissible. When the ambient temperature does not exceed 30°C, it will not ordinarily be necessary to provide forced cooling of the bulb and plate seal to hold the temperature below this maximum at frequencies below 30 MHz, provided that a heat-radiating plate connector is used, and the tube is so located that normal circulation of air past the envelope is not impeded. The five cubic feet per minute base-cooling requirement must be observed in intermittent service.

Tube temperatures may be measured with a temperature sensitive paint, spray or crayon,

such as manufactured by Tempil Division, Big Three Industrial Gas & Equipment Co., Hamilton Blvd., So. Plainfield, N.J. 07080.

### ELECTRICAL

**FILAMENT VOLTAGE** - For maximum tube life the filament voltage, as measured directly at the filament pins, should be the rated voltage of 5.0 volts. Variations in filament voltage must be kept within the range from 4.75 to 5.25 volts.

**BIAS VOLTAGE** - The dc bias voltage for the 4-250A should not exceed 500 volts. If grid resistor bias is used, suitable means must be provided to prevent excessive plate or screen dissipation in the event of loss of excitation, and the grid resistor should be made adjustable to facilitate maintaining the bias voltage and plate current at the desired values from tube to tube. In operation above 50 MHz, it is advisable to keep the bias voltage as low as is practicable.

**SCREEN VOLTAGE** - The dc screen voltage for the 4-250A should not exceed 600 volts. The screen voltages shown under Typical Operation are representative voltages for the type of operation involved.

**PLATE VOLTAGE** - The plate-supply voltage for the 4-250A should not exceed 4000 volts in CW and audio applications. In plate-modulated telephony service the dc plate supply voltage should not exceed 3200 volts, except below 10 MHz, intermittent service, where 4000 volts may be used.

**GRID DISSIPATION** - Grid dissipation for the 4-250A should not be allowed to exceed 10 watts. Grid dissipation may be calculated from the following expression:

$$P_g = e_{gk} \times I_c$$

where  $P_g$  = Grid dissipation

$e_{gk}$  = Peak positive grid to cathode voltage,  
and

$I_c$  = dc grid current

$e_{gk}$  may be measured by means of a suitable peak voltmeter connected between filament and grid.



**SCREEN DISSIPATION** - The power dissipated by the screen of the 4-250A must not exceed 35 watts. Screen dissipation is likely to rise to excessive values when the plate voltage, bias voltage or plate load are removed with filament and screen voltages applied. Suitable protective means must be provided to limit screen dissipation to 35 watts in event of circuit failure.

**PLATE DISSIPATION** - Under normal operating conditions, the plate dissipation of the 4-250A should not be allowed to exceed 250 watts. The anode of the 4-250A operates at a visibly red color at its maximum rated dissipation of 250 watts.

In plate modulated amplifier applications, the maximum allowable carrier-condition plate dissipation is 165 watts. The plate dissipation will rise to 250 watts under 100% sinusoidal modulation.

Plate dissipation in excess of the maximum rating is permissible for short periods of time, such as during tuning procedures.

**PULSE SERVICE** - For pulse service, the EIMAC 4PR400A should be used.


**MULTIPLE OPERATION** - To obtain maximum power output with minimum distortion from tubes operated in multiple, it is desirable to adjust individual screen or grid bias voltages so that the peak plate current for each tube is equal at the crest of the exciting voltage. Under these conditions, individual dc plate currents will be approximately equal for full input signal for class AB<sub>1</sub> operation.

**CAUTION-GLASS IMPLOSION** - The EIMAC 4-250A is pumped to a very high vacuum, which is contained by a glass envelope. When handling a glass tube, remember that glass is a relatively fragile material, and accidental breakage can result at any time. Breakage will result in flying glass fragments, so safety glasses, heavy clothing, and leather gloves are recommended for protection.

**CAUTION-HIGH VOLTAGE** - Operating voltage for the 4-250A can be deadly, so the equipment must be designed properly and operation precautions must be followed. Design equipment so that no one can come in contact with high voltages. All equipment must include safety enclosures for high voltage circuits and terminals, with interlock

switches to open the primary circuits of the power supply and to discharge high voltage capacitors whenever access doors are opened. Interlock switches must not be bypassed or "cheated" to allow operation with access doors open. Always remember that HIGH VOLTAGE CAN KILL.

**SPECIAL APPLICATION** - If it is desired to operate this tube under conditions widely different from those listed here, write to Power Grid Tube Division, EIMAC Division of Varian, 301 Industrial Way, San Carlos, California 94070, for information and recommendations.

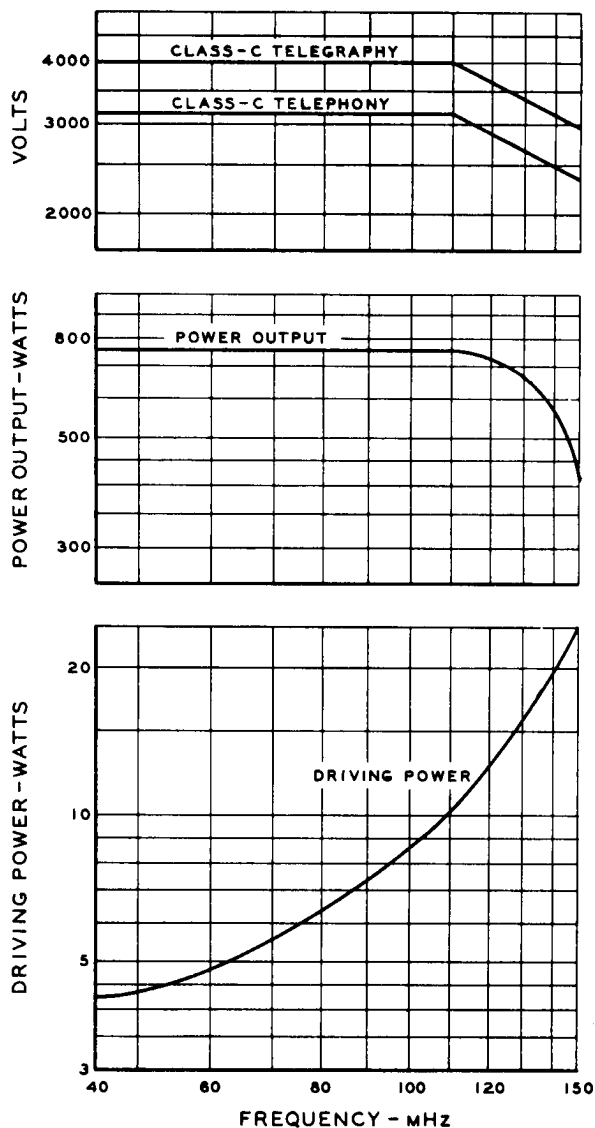

OPERATING CHARACTERISTICS ABOVE 40 MHz




DIMENSIONAL DATA


DIM.	INCHES			MILLIMETERS		
	MIN	MAX	REF	MIN	MAX	REF
A	5.875	6.375	--	149.23	161.93	--
B	--	3.563	--	--	90.50	--
D	5.125	5.625	--	130.18	142.88	--
E	0.350	0.365	--	8.89	9.27	--
F	0.328	--	--	8.33	--	--
H	--	--	0.438	--	--	11.13
J	--	0.969	--	--	24.61	--
K	--	0.250	--	--	6.35	--
L	--	--	0.750	--	--	19.05
M	--	--	0.250	--	--	6.35
N	--	2.750	--	--	69.85	--
P	--	--	0.312	--	--	7.92
Q	--	--	0.500	--	--	12.70
R	--	--	1.625	--	--	41.28
S	--	--	1.250	--	--	31.75
T	0.185	0.191	--	4.70	4.85	--
U	--	--	30°	--	--	30°
V	--	--	60°	--	--	60°
W	--	--	45°	--	--	45°

NOTES:


1. REF DIMENSIONS ARE FOR INFO. ONLY & ARE NOT REQUIRED FOR INSPECTION PURPOSES.

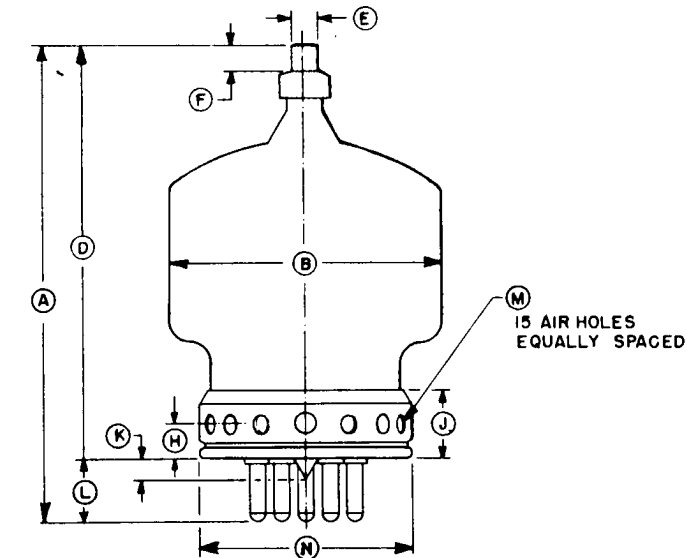

15 AIR HOLES EQUALLY SPACED

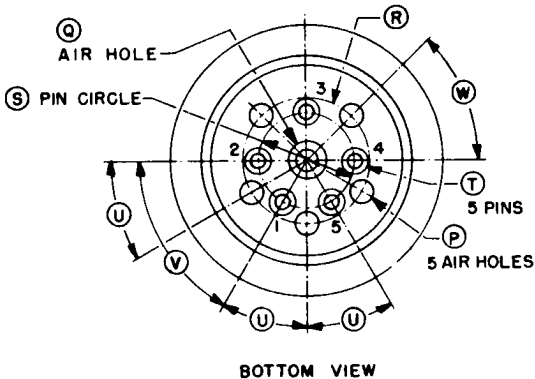

BOTTOM VIEW



NOTE:

Base pins T and tubulation K are so alined that they can be freely inserted in a gage ¼ inch (6.35 mm) thick with hole diameters of .204 (5.18 mm) and .500 (12.70 mm), respectively, located on the true centers by the given dimensions S, U, V.

