

EDISWAN

68530

FULL WAVE GAS DISCHARGE RECTIFIER

GENERAL

Type 68530 is a full wave gas discharge rectifier suitable for use in low voltage charging circuits.

RATING

Filament Voltage (volts)	V_f	2.0
Filament Current (amps)	I_f	8.0
D.C. Output		30 volts 6 amps

DIMENSIONS

Maximum Overall Length (inc. pins) (mm)	150
Maximum Diameter (mm)	80
Approximate Nett Weight (ozs)	4
Approximate Home Packed Weight (ozs)	8
Approximate Export Packed Weight (ozs)	16

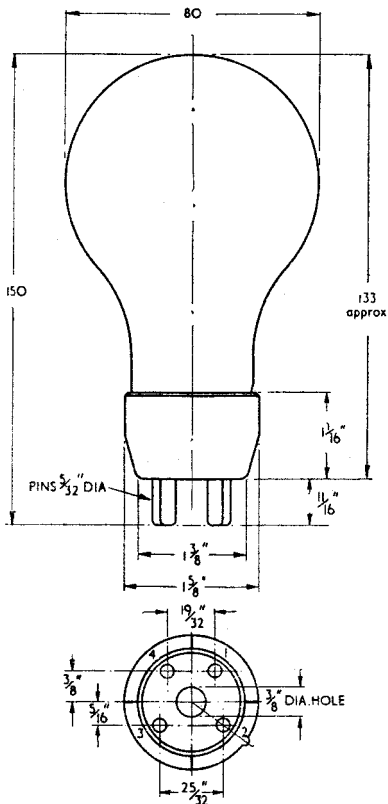
MOUNTING POSITION—Vertical

BASE—Special 4-pin

CONNECTIONS

Pin 1	Filament	f
Pin 2	Anode	a
Pin 3	Anode	a
Pin 4	Filament	f

68530

EDISWAN**68530****FULL WAVE GAS DISCHARGE RECTIFIER**

All dimensions in mm unless otherwise stated.

January 1960

INDUSTRIAL
VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED