

**CHARACTERISTICS**

**GENERAL DATA**

Focusing Method . . . . .	Electrostatic
Deflection Method . . . . .	Magnetic
Deflection Angles (Approx.)	
Horizontal . . . . .	101 Degrees
Diagonal . . . . .	114 Degrees
Vertical . . . . .	86 Degrees
Phosphor . . . . .	Aluminized P4
Fluorescence . . . . .	White
Persistence . . . . .	Medium Short
Faceplate . . . . .	Gray Filter Glass
Light Transmittance (Approx.) . . . . .	78 Percent

**ELECTRICAL DATA**

Heater Voltage . . . . .	6.3 Volts	
Heater Current . . . . .	0.60 ± 5 % Ampere	
Heater Warm-up Time <sup>1</sup> . . . . .	11 Seconds	
Direct Interelectrode Capacitances (Approx.)		
Cathode to All Other Electrodes . . . . .	5 pf	
Grid No. 1 to All Other Electrodes . . . . .	6 pf	
External Conductive Coating to Anode <sup>2</sup> . . . . .	1500 pf	Max.
	1000 pf	Min.

**MECHANICAL DATA**

Minimum Useful Screen Dimensions (Maximum Assured)	
Height . . . . .	12 Inches
Width . . . . .	15 1/8 Inches
Diagonal . . . . .	17 9/16 Inches
Minimum Useful Screen Area . . . . .	172 Sq. Inches
Neck Length . . . . .	4 3/8 ± 1/8 Inches
Overall Length . . . . .	11 5/8 ± 1/4 Inches
Bulb . . . . .	J149A
Bulb Contact (Recessed Small Cavity Cap) . . . . .	J1-21
Base . . . . .	B7-208
Basing . . . . .	8HR
Weight (Approx.) . . . . .	13 1/2 Pounds



**RATINGS**

**MAXIMUM RATINGS (Design Maximum Values)**

<b>Cathode Drive Service<sup>3</sup></b>		
Maximum Anode Voltage . . . . .	20,000 Volts	dc
Minimum Anode Voltage . . . . .	10,000 Volts	dc
Grid No. 4 Voltage (Focusing Electrode) . . . . .	-400 to +1250 Volts	dc
Maximum Grid No. 2 Voltage . . . . .	70 Volts	dc
Minimum Grid No. 2 Voltage . . . . .	40 Volts	dc
<b>Cathode Voltage</b>		
Positive Bias Value . . . . .	100 Volts	dc
Positive Peak Value . . . . .	150 Volts	
Negative Bias Value . . . . .	0 Volt	dc
Negative Peak Value . . . . .	2 Volts	
<b>Peak Heater-Cathode Voltage</b>		
Heater Negative with Respect to Cathode		
During Warm-up Period Not to Exceed		
15 Seconds . . . . .	450 Volts	
After Equipment Warm-up Period . . . . .	200 Volts	
Heater Positive with Respect to Cathode . . . . .	200 Volts	

**QUICK REFERENCE DATA**

Television Picture Tube  
 19" Direct Viewed  
 Rectangular Glass Type  
 Spherical Faceplate  
 Gray Filter Glass  
 Aluminized Screen  
 Electrostatic Focus  
 114° Magnetic Deflection  
 1 1/8" Neck Diameter  
 No Ion Trap  
 External Conductive Coating  
 Low Grid No. 2 Voltage



**SYLVANIA**  
**ELECTRONIC TUBES**  
 A Division of  
 Sylvania Electric Products Inc.  
**PICTURE TUBE**  
**OPERATIONS**  
**SENECA FALLS, NEW YORK**  
 Prepared and Released By The  
 TECHNICAL PUBLICATIONS SECTION  
 EMPORIUM, PENNSYLVANIA  
 DECEMBER, 1963  
 PAGE 1 OF 3  
 File Under  
**TELEVISION PICTURE TUBES**

**TYPICAL OPERATING CONDITIONS**

**Cathode Drive Service<sup>3</sup>**

Anode Voltage . . . . .	16,000 Volts	dc
Grid No. 4 Voltage for Focus . . . . .	0 to 400 Volts	dc
Grid No. 2 Voltage . . . . .	50 Volts	dc
Cathode Voltage Required for Cutoff <sup>4</sup> . . . . .	32 to 50 Volts	dc

**CIRCUIT VALUES**

Grid No. 1 Circuit Resistance . . . . .	1.5 Megohms Max.
---	------------------


**NOTES:**

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80 % of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the heater current.
2. External conductive coating must be grounded.
3. Voltages are positive with respect to Grid 1 unless indicated otherwise.
4. Visual extinction of focused raster. For cutoff of the undeflected focused spot, the absolute value of the bias between cathode and grid will increase by about 5 volts.

**WARNING:**

*X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.*

**OUTLINE**

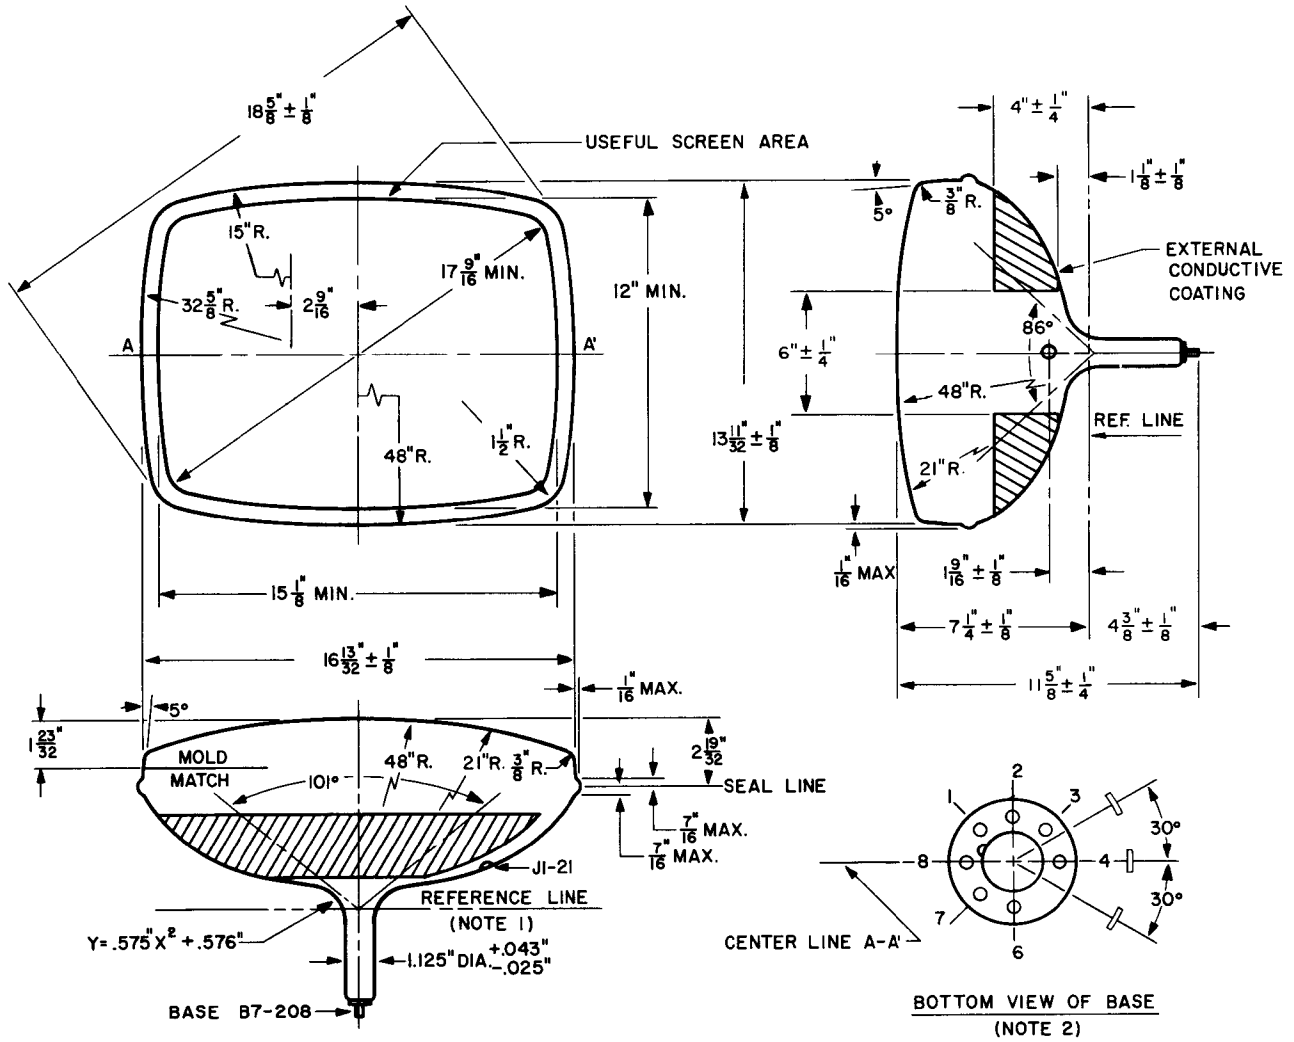

D63035

**DIAGRAM NOTES:**

1. Reference Line is determined by plane C-C' of JEDEC No. 126 Reference Line Gauge, when the gauge is seated against the bulb.
2. Base Pin No. 4 aligns with horizontal centerline (A-A') within  $30^\circ$  and is on same side as anode contact, J1-21.