

16 INCH, RECTANGULAR, GLASS	FACE PLATE -- SPHERICAL GRAY
FOCUS -- ELECTROSTATIC	INTEGRAL PLASTIC IMPLOSION BARRIER
DEFLECTION -- MAGNETIC	ALUMINIZED SCREEN
114 DEGREE DEFLECTION	EXTERNAL CONDUCTIVE COATING

LOW GRID NO. 2 VOLTAGE TYPE
FOR CATHODE-DRIVE OPERATION

-----DESCRIPTION AND RATING-----

The 16ATP4 is a 16 inch electrostatic-focus and magnetic deflection glass light-weight picture tube employing an integral plastic implosion barrier. Other outstanding features include a short over-all length, a small neck diameter and a non ion trap gun designed for operation at a low Grid No. 2 voltage for use in cathode-drive circuits. The fluorescent screen is aluminized to increase light output and reduce undesirable screen charging. An external conductive coating is provided to serve as a filter capacitor when grounded.

ELECTRICAL DATA

Focusing Method	Electrostatic
Deflection Angle, Approximate	
Horizontal	102 degrees
Vertical	84 degrees
Diagonal	114 degrees
Direct Interelectrode Capacitance	
Cathode to all other electrodes, approx.	5 μ f
Grid #1 to all other electrodes, approx.	6 μ f
External Conductive Coating to Anode.	1500 max. μ f 1000 min. μ f
Heater Current at 6.3 volts	450 \pm 23 ma.
Heater Warm-Up Time	11 sec.

OPTICAL DATA

Phosphor Number	P4 Aluminized
Light Transmittance at Center(Approximate).	48 Percent




MAXIMUM CIRCUIT VALUES

Maximum Grid #1 Circuit Resistance 1.5 max. megohm
Grid No. 2 Circuit Resistance 0.1 min. megohm
Focusing Electrode Circuit Resistance. 0.1 min. megohm

Protective resistance in Grid No. 2 and focusing electrical circuits is advisable to prevent damage to tube. If applicable, one resistor common to both circuits may be used.



NOTES:

1. Visual extinction of focused raster.
2. With the combined Grid #1 bias voltage and video-signal voltage adjusted to give an anode current of $150 \mu\text{a}$ on a 12-15/16" x 10-1/4" pattern from RCA 2F21 monoscope or equivalent.
3. Individual tubes will have satisfactory focus at some value between 0 and 500 volts.

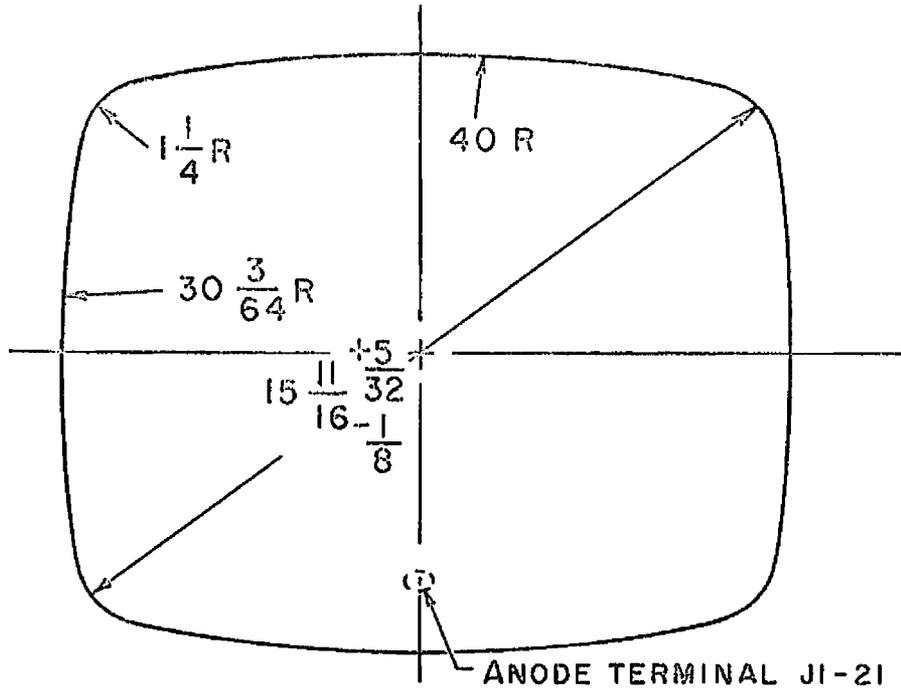


16ATP4

SCREEN DIMENSIONS
 DIAGONAL — $14\frac{7}{8}$
 WIDTH — $12\frac{15}{16}$
 HEIGHT — $10\frac{1}{4}$
 AREA — 125 SQ. IN.

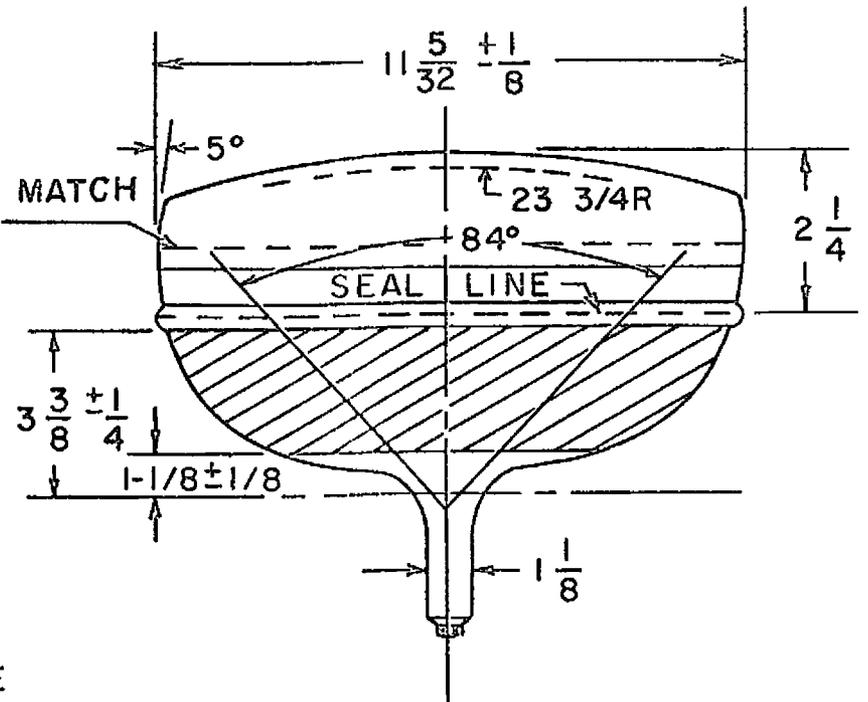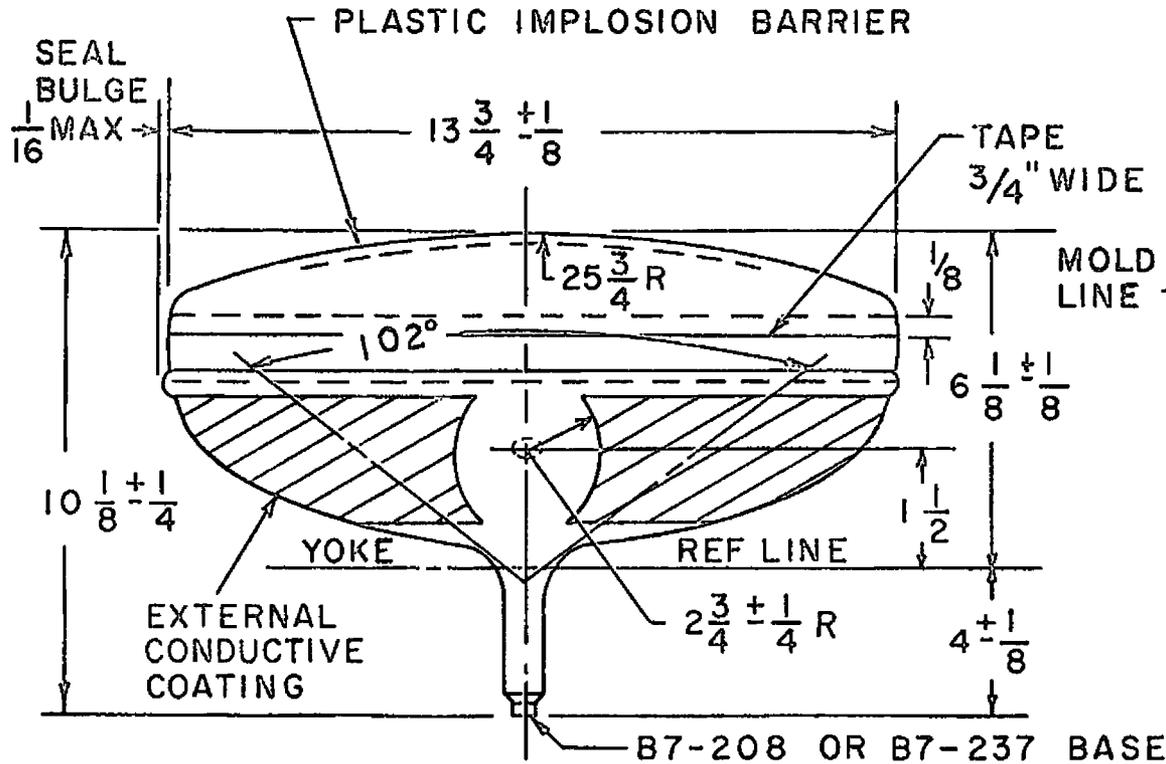

OUTLINE NOTES

1. The reference line is determined by the intersection of the plane C-C of gage (EIA No. 126) with the glass funnel.
2. Deflection angle on the diagonal is 114° .
3. Anode terminal aligns with pin no. 4 ± 30 degrees.
4. Use a non-rigidly mounted socket with flexible leads. Bottom circumference of base wafer will fall within 1-3/4 inch diameter circle concentric with the bulb axis.

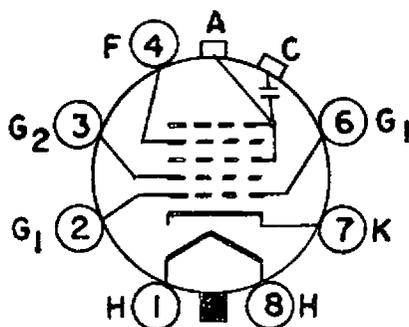

**BASING DIAGRAM
8 HR**