
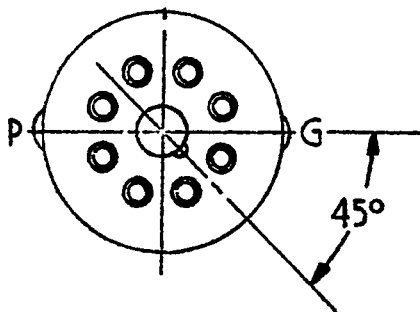


RMA TYPE 2C26


Tentative Technical Data

Special Triode Oscillator

GENERAL CHARACTERISTICS

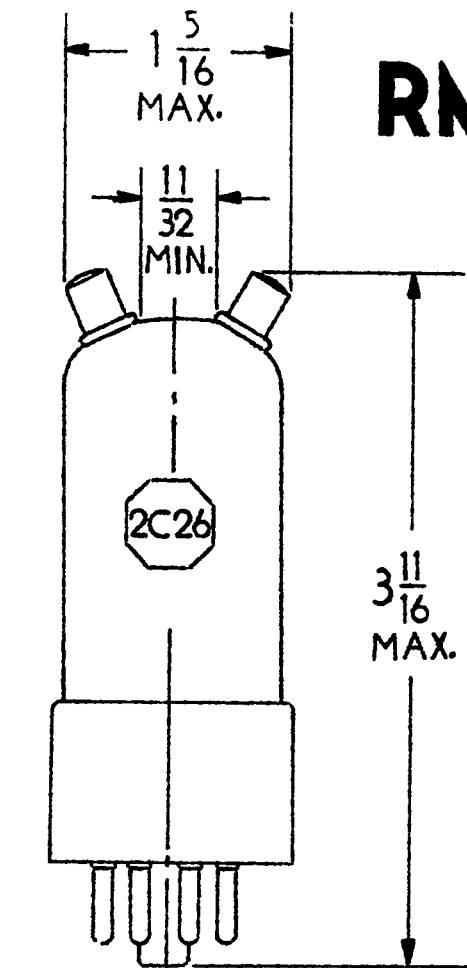

Basing Connections



Bottom View

Electrical

Coated Unipotential Cathode	
Heater Voltage	6.3 volts
Heater Current	1.1 amps.
Plate Dissipation	10 max. watts
Average Characteristics	
E_b	400 V.
E_c	-15 V., E_f 6.3 V.
Plate Current	16 ma.
Amplification Factor	16.3
Transconductance	2200 micromhos
Average Direct Inter-electrode Capacitances	
Grid-to-Plate	2.6 mmf.
Grid-to-Cathode	2.6 mmf.
Plate-to-Cathode	1.0 mmf.
Frequency for Maximum Rating 300 MC	

Mechanical

Type of cooling:	Convection
Base (see diagram)	Intermediate shell
	Octal 8-pin phenolic
Top Caps	Special skirted miniature
Bulb	T-9
Maximum overall dimensions	(see outline)
Length	3-11/16 inches
Seated Height	3-1/8 inches
Diameter	1-5/16 inches
Net Weight	1-1/2 ounces