

Heizung dir. Batterie . . . . .	Vf	2,0 V
Chauffage dir. batterie . . . . .	If	0,15 A
Heating dir. battery . . . . .		

Betriebsdaten

Données relatives au fonctionnement

Operating conditions

Va . . . . .	90	135 V
Vg2 . . . . .	90	100 V
Vg1 . . . . .	-4,5	-6 V
Ia . . . . .	8	8 mA
Ig2 . . . . .	1,2	1,2 mA
S (Vg1 = -6,4) . . . . .		1,7 mA/V
S (Vg1 = -4,5 V) . . . . .	1,7	mA/V
Ri (Vg1 = -6 V) . . . . .		100000 Ohm
Ri (Vg1 = -4,5 V) . . . . .	80000	Ohm

Grenzdaten

Données-limites




Limits.


Va max . . . . .		135 V
Wa max . . . . .		1,5 W
Ik max . . . . .		12 mA
Vg2o max . . . . .		135 V
Vg2 max . . . . .		100 V
Wg2 max . . . . .		0,3 W
Vg1 max (I <sub>g1</sub> = 0,3 μA) . . . . .		-0,2 V
Rg1f max . . . . .		1,5 MOhm
Wo . . . . .	0,2	0,4 W
Ra . . . . .	14000	14000 Ohm
Vg1 eff . . . . .	3	4,2 V

Elektrodenanordnung und Sockelschaltung

Disposition des électrodes et connexion du culot

Arrangement of electrodes and base connection




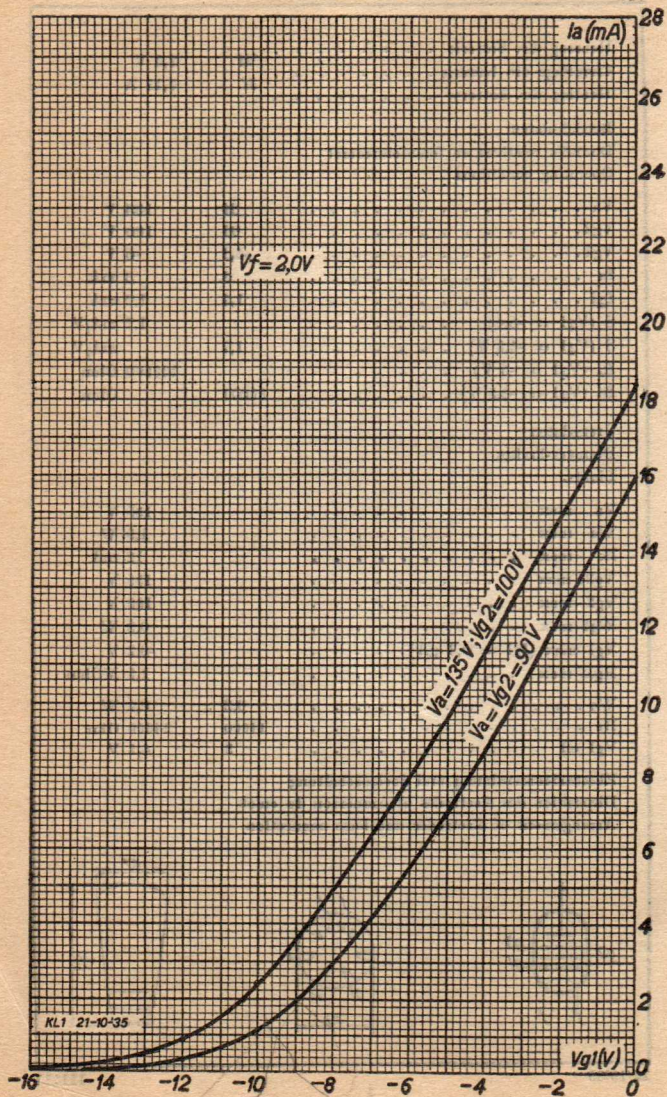**KL 1****PHILIPS „MINIWATT“  
KL 1  
PENTHODE**

KL 1 21-10-35

PHILIPS „MINIWATT”  
KL 1  
PENTHODE

KL 1

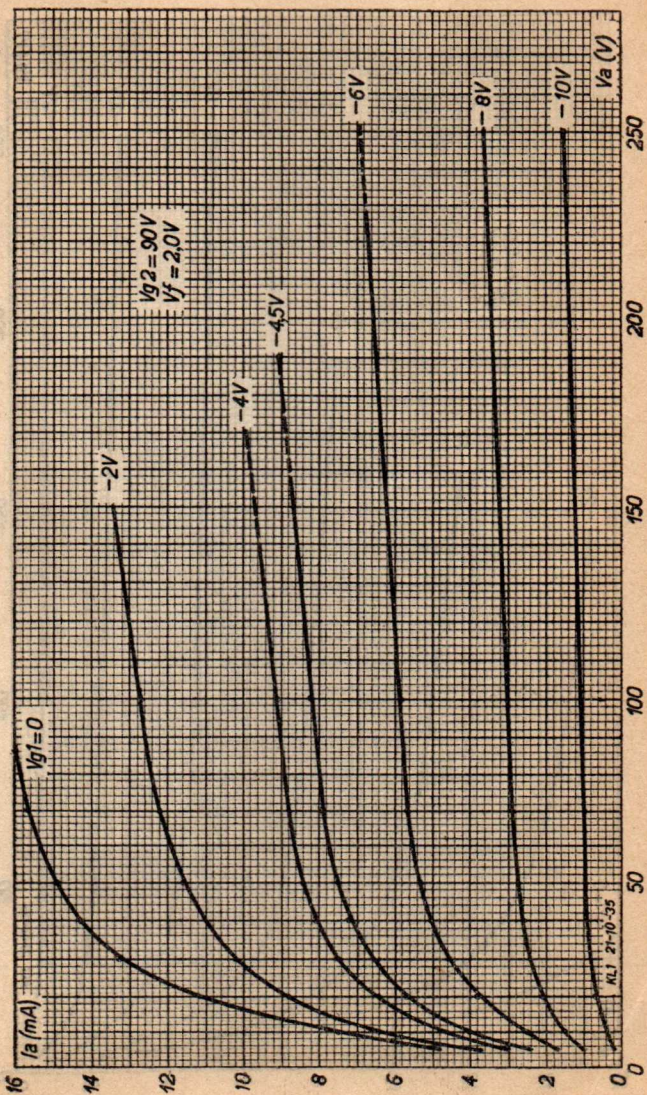

KL 1

PHILIPS „MINIWATT“  
KL 1  
PENTHODE

