



T.	Image	Image	U _f V	I _f A	Cl.	f MHz	U _a V	U _{g2} V	U _{g1} V	I _a mA	I _{g2} mA	I _{g1} mA	P _o W	P _{g2} W	P _a W
KT 8	MOG	1	6,3	1,27	C-Tgr	15	400	250		80	10	5,5	23		
						15	500	300		80	7	5	30		
						15	600	300		85	6	4	38		
						50	300	250		90	11	6	11,5		
						50	400	300		95	11	6	17		
						50	600	300		95	9	5,5	27		
						20	400	220		80	12	2	22		
						20	475	250		80	10	2	27		
						20	400	250	-40	68	6	0	8		
						20	500	250	-40	70	5	0	11,5		
						20	600	300	-50	65	4	0	13		
						P 40	SFR	2	6,3	1,5	stat.	5/15	250	250	
5/15	600	250		55	5							1,5	12		
20/60	300	250		70	4							2	3		
20/60	350	300		90	10							4	7		
stat.	250	250		70	S = 6 mA/V										
stat.	600	300		100	maximum										
PV 06-25	Mul	3	6,3	1,3	C-Tgr stat.	50	500	200	-75	100			40		
						20	500	275		maximum I _k = 135 mA; S = 7 mA/V			7		
						60	600	300		75	109	11,5	45		

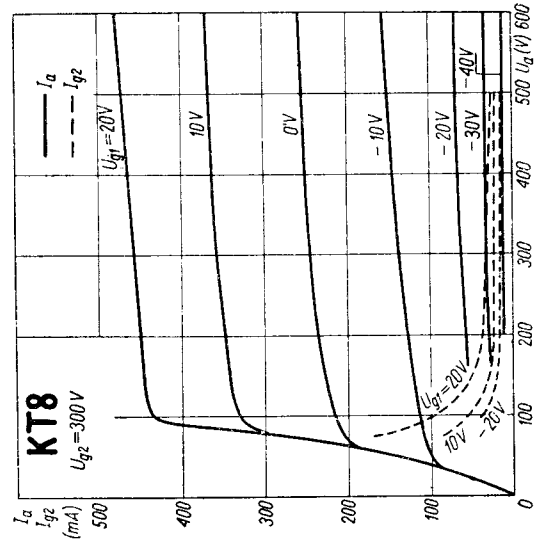


Equivalent KT 8




PV06-25

T.	C _{g1}		C _a	
	pF	C _{g1/a}	pF	pF
KT 8	13,2	0,2	5,2	0,2
P 40	16	0,1	8	0,1
PV 06-25	14,5	0,25	8	0,25



P40



KT8

